
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, R AND W) (C)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

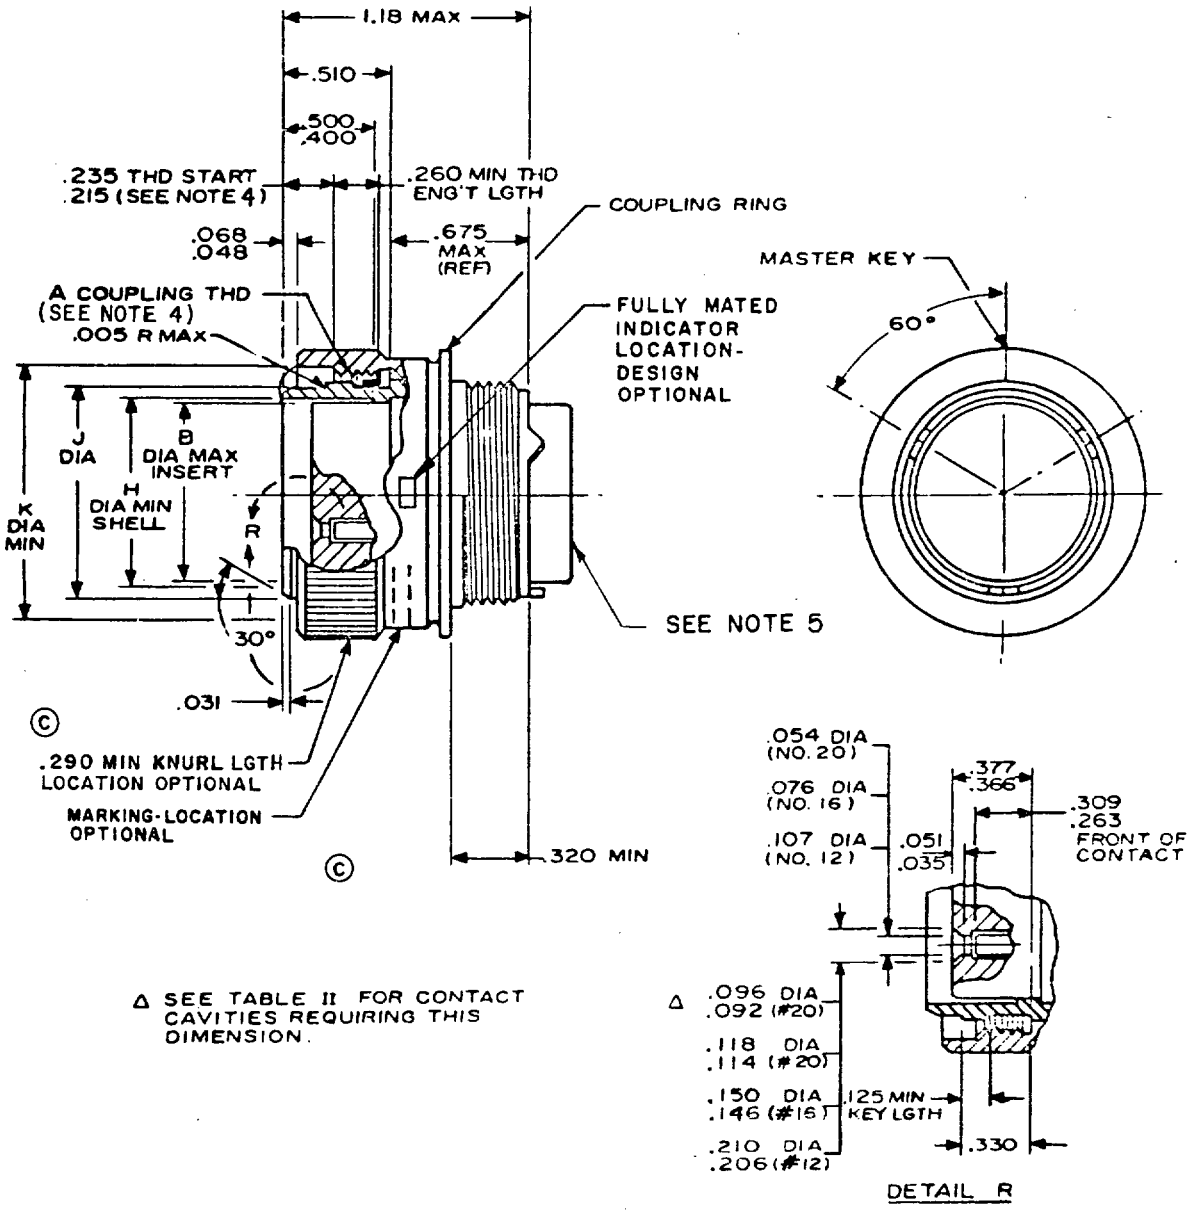

Δ SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION.

(C) denotes changes

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/2495

FSC 5935

Source: https://assist.dla.mil - Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.

SHELL SIZE	A THREAD UNEF-2B	B	H	J	K
8	.5625-24	.290	.294	.400 .405	.575
10	.6875-24	.388	.428	.526 .521	.707
12	.875-20	.558	.598	.696 .691	.895
14	.9375-20	.627	.667	.765 .760	.957
16	1.0625-18	.772	.794	.892 .887	1.084
18	1.1875-18	.860	.900	.998 .993	1.209
20	1.3125-18	.985	1.025	1.123 1.118	1.334
22	1.4375-18	1.110	1.150	1.248 1.243	1.459
24	1.5625-18	1.235	1.275	1.373 1.368	1.584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.290	7.37	.760	19.30	1.18	29.97
.031	.79	.294	7.47	.765	19.43	1.1875	30.16
.035	.89	.309	7.85	.772	19.61	1.209	30.71
.048	1.22	.330	8.38	.794	20.17	1.243	31.57
.051	1.30	.366	9.30	.830	21.08	1.248	31.70
.054	1.37	.377	9.58	.860	21.84	1.260	32.00
.068	1.73	.388	9.86	.875	22.23	1.4375	36.51
.076	1.93	.400	10.16	.880	22.35	1.457	37.01
.081	2.06	.405	10.29	.887	22.53	1.459	37.06
.087	2.21	.410	10.41	.892	22.66	1.807	45.90
.092	2.34	.428	10.87	.895	22.73	2.042	51.87
.096	2.44	.500	12.70	.900	22.86	2.080	52.83
.107	2.71	.510	12.95	.9375	23.81	2.084	52.93
.112	2.84	.521	13.23	.950	24.13	2.184	55.47
.114	2.90	.526	13.36	.957	24.31	2.215	56.26
.118	3.00	.558	14.17	.993	25.22	2.305	58.55
.125	3.18	.5625	14.29	.998	25.35	2.314	58.78
.146	3.71	.598	15.19	1.010	25.65	2.440	61.98
.150	3.81	.627	15.93	1.0625	26.99	2.539	64.49
.206	5.23	.667	16.94	1.070	27.18	2.544	64.62
.210	5.33	.675	17.15	1.084	27.53	2.795	70.99
.215	5.46	.6875	17.46	1.110	28.19	2.809	71.35
.235	5.97	.691	17.55	1.130	28.70	3.250	82.55
.260	6.60	.696	17.68	1.150	29.21	4.734	120.24
.263	6.68	.707	17.96				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/83, 85, 88, 89, and 90.

For insert arrangements see MIL-STD-1554.

Visual indicator required to indicate locked position.

Part number example:

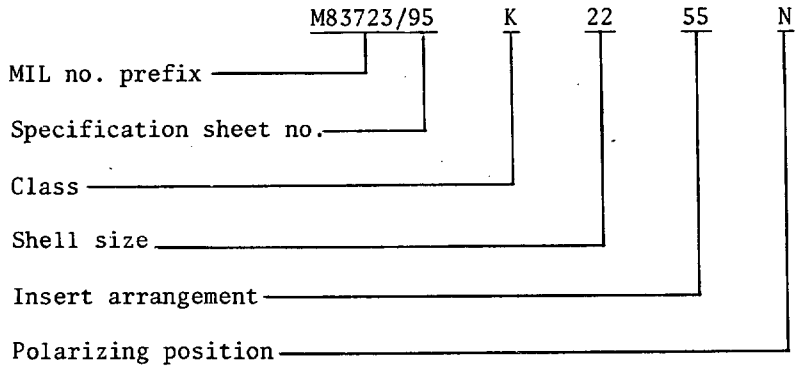

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5937-3191-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.