
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, CRIMP PIN CONTACT), (SERIES III, CLASSES A, G, K, R AND W) (C)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

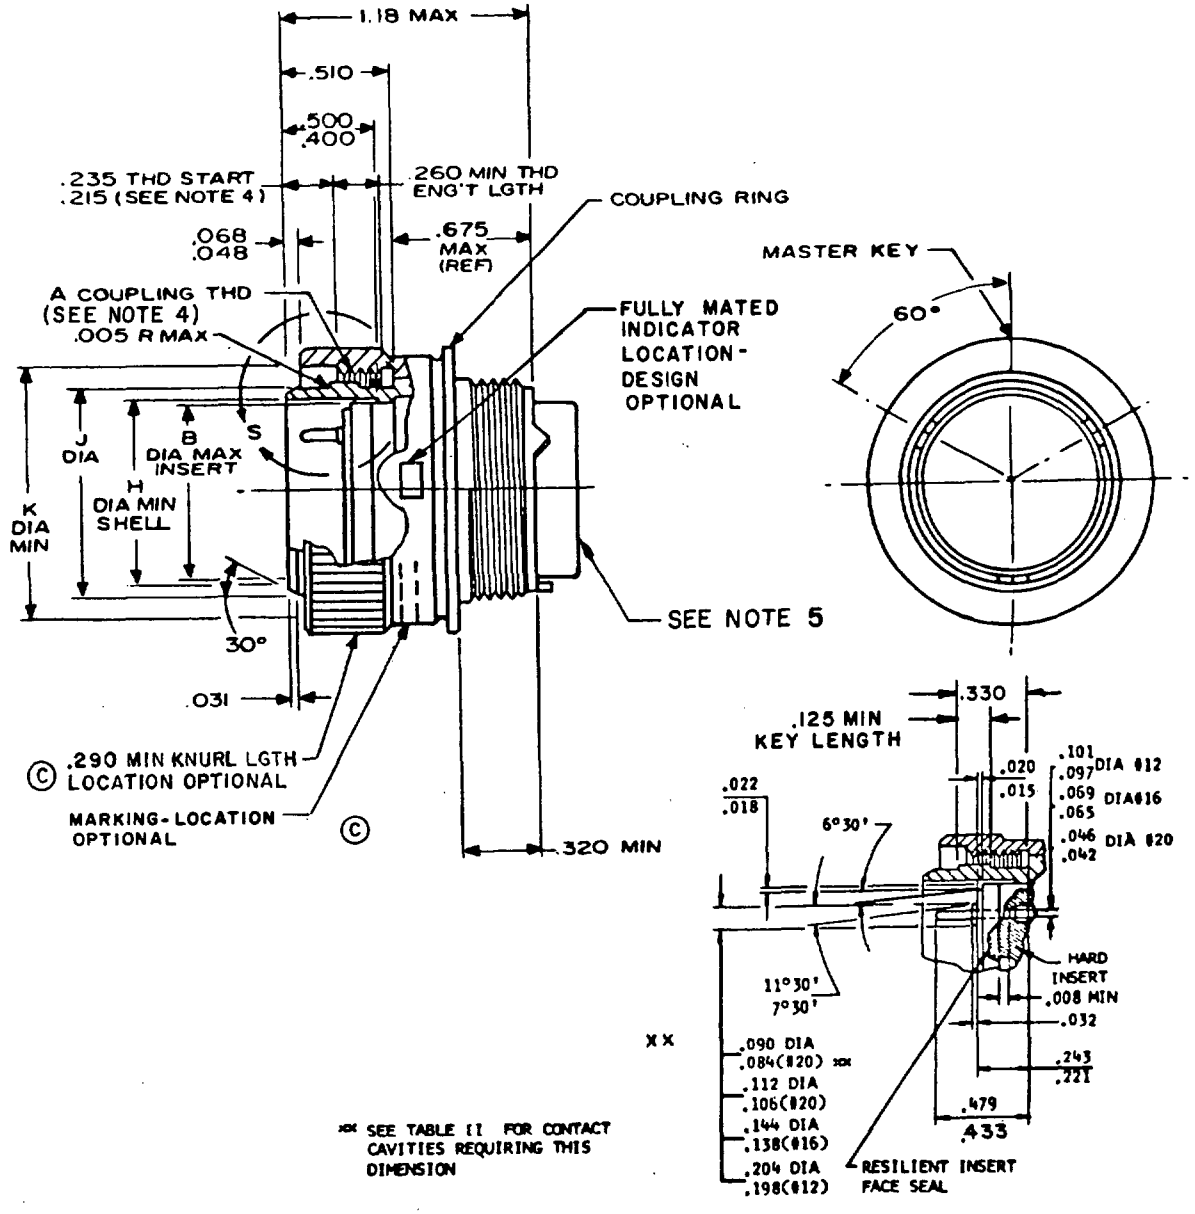

(C) denotes changes

FSC 5935

Source: https://assist.dla.mil - Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.

SHELL SIZE	A THREAD UNEF-2B	B	H	J	K
8	.5625-24	.290	.294	.400 .405	.575
10	.6875-24	.388	.428	.526 .521	.707
12	.875-20	.558	.598	.696 .691	.895
14	.9375-20	.627	.667	.765 .760	.957
16	1.0625-18	.772	.794	.892 .887	1.084
18	1.1875-18	.860	.900	.998 .993	1.209
20	1.3125-18	.985	1.025	1.123 1.118	1.334
22	1.4375-18	1.110	1.150	1.248 1.243	1.459
24	1.5625-18	1.235	1.275	1.373 1.368	1.584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.204	5.18	.6875	17.46	1.130	28.70
.008	.20	.215	5.46	.691	17.55	1.150	29.21
.015	.38	.221	5.61	.696	17.68	1.18	29.97
.018	.46	.235	5.97	.707	17.96	1.1875	30.16
.020	.51	.243	6.17	.760	19.30	1.209	30.71
.022	.56	.260	6.60	.765	19.43	1.243	31.57
.031	.79	.290	7.37	.772	19.61	1.248	31.70
.032	.81	.294	7.47	.794	20.17	1.260	32.00
.042	1.07	.320	8.13	.830	21.08	1.4375	36.51
.046	1.17	.388	9.86	.860	21.84	1.457	37.01
.048	1.22	.400	10.16	.875	22.23	1.459	37.06
.065	1.65	.405	10.29	.880	22.35	1.807	45.90
.068	1.73	.410	10.41	.887	22.53	2.042	51.87
.069	1.75	.428	10.87	.892	22.66	2.080	52.83
.081	2.06	.454	11.56	.895	22.73	2.084	52.93
.084	2.13	.479	12.17	.900	22.86	2.184	55.47
.087	2.21	.500	12.70	.9375	23.81	2.215	56.26
.090	2.29	.510	12.95	.950	24.13	2.305	58.55
.097	2.46	.521	13.23	.957	24.31	2.314	58.78
.101	2.57	.526	13.36	.993	25.22	2.440	61.98
.106	2.69	.558	14.17	.998	25.35	2.539	64.49
.112	2.84	.5625	14.29	1.010	25.65	2.544	64.62
.118	3.00	.598	15.19	1.0625	26.99	2.795	70.99
.138	3.51	.627	15.93	1.070	27.18	2.809	71.35
.144	3.66	.667	16.94	1.084	27.53	3.250	82.55
.198	5.03	.675	17.15	1.110	28.19	4.734	120.24

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/82 and 84.

For insert arrangements see MIL-STD-1554.

Visual indicator required to indicate locked position.

Part number example:

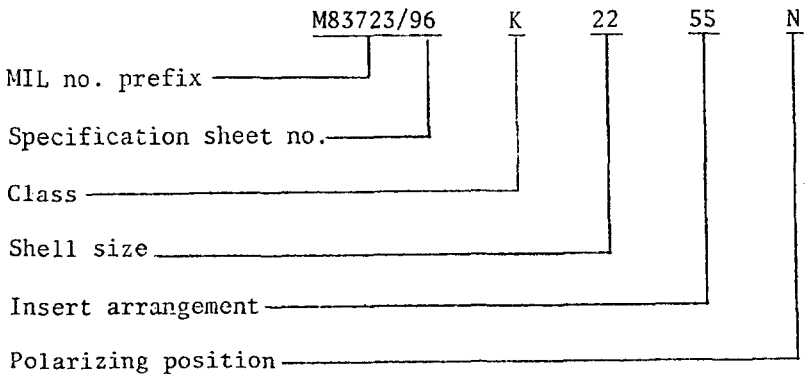

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3191-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.