INCH-POUND

MIL-C-83723/97B

24 April 1992

SUPERSEDING
MIL-C-83723/97A
10 March 1983

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, R.F.I. GROUNDING, CRIMP SOCKET CONTACTS), (SERIES III, CLASSES N AND S FIREWALL)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.


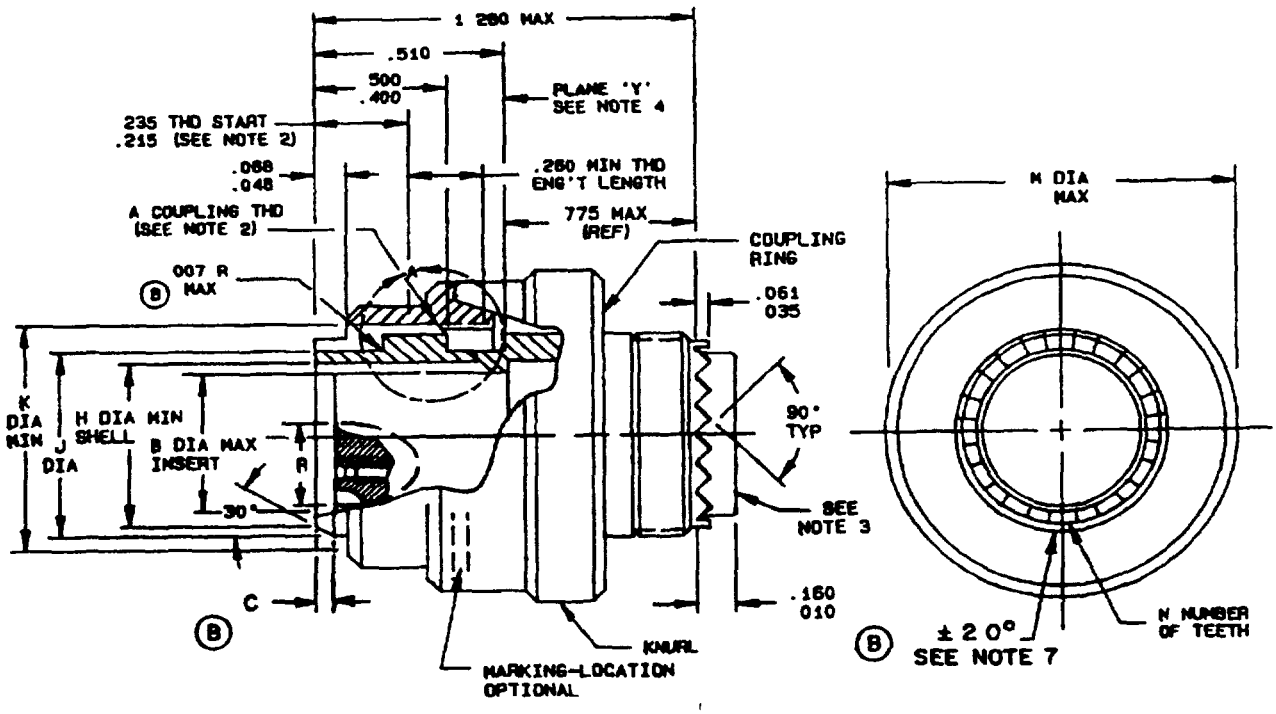


FIGURE 1. Dimensions and configurations.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

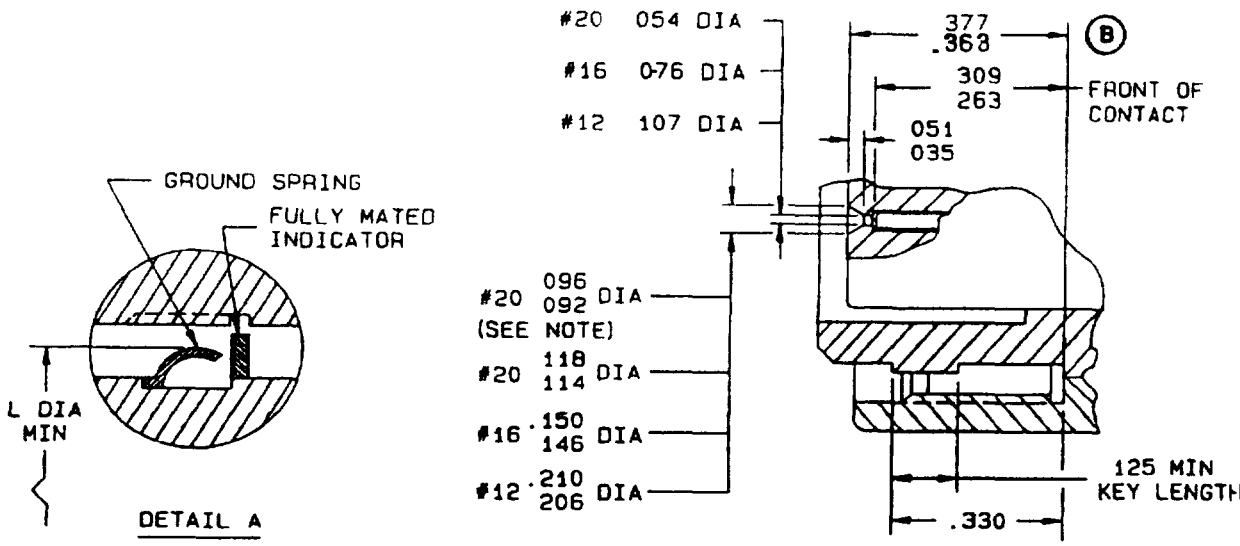

NOTE SEE TABLE I FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

Connectors dimensions.

Shell size	A Thread UNEF-2B	B	Ⓑ C	H	J	K	L	M	N
8	.562-24	.290	.025	.294	.405 .396	.575	.425	.967	12
10	.688-24	.388	.031	.428	.526 .517	.707	.546	1.093	15
12	.875-20	.558	.031	.598	.696 .687	.895	.711	1.170	21
14	.938-20	.627	.031	.667	.765 .756	.957	.785	1.310	24
16	1.062-18	.772	.031	.794	.892 .883	1.084	.912	1.500	30
18	1.188-18	.860	.031	.900	.998 .989	1.209	1.018	1.562	33
22	1.438-18	1.110	.031	1.150	1.248 1.239	1.459	1.268	1.812	39

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.210	5.33	.562	14.27	.967	24.56
.007	0.18	.215	5.46	.575	14.60	.989	25.12
.010	0.25	.235	5.97	.598	15.19	.998	25.35
.025	0.64	.260	6.60	.627	15.93	1.062	26.97
.031	0.79	.263	6.68	.667	16.94	1.084	27.53
.035	0.89	.290	7.37	.687	17.45	1.093	27.76
.048	1.22	.294	7.47	.688	17.48	1.110	28.19
.051	1.30	.309	7.85	.696	17.68	1.150	29.21
.054	1.37	.310	7.87	.707	17.96	1.170	29.71
.061	1.55	.330	8.38	.756	19.20	1.188	30.18
.068	1.73	.366	9.30	.765	19.43	1.209	30.71
.076	1.93	.377	9.58	.772	19.61	1.239	31.47
.092	2.34	.388	9.86	.775	19.69	1.248	31.70
.096	2.44	.396	10.05	.794	20.17	1.280	32.51
.107	2.71	.400	10.16	.860	21.84	1.310	33.27
.114	2.90	.405	10.29	.875	22.23	1.438	36.53
.118	3.00	.428	10.87	.883	22.43	1.459	37.06
.125	3.18	.500	12.70	.892	22.66	1.500	38.10
.146	3.71	.510	12.95	.895	22.73	1.562	39.67
.150	3.81	.517	13.13	.900	22.86	1.812	46.02
.160	4.06	.526	13.36	.938	23.83		
.206	5.23	.558	14.71	.957	24.31		

NOTES:
1. Dimensions are inches.
2. Metric equivalent (to the nearest .01 mm) are given for genaral information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (.025 mm) for two place decimals: angular tolerance ±1°0′ and ±30′.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. (B) The centerline of indicated projection must be located on vertical centerline within 2.0°.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/83, 85, 88, 89, and 90.

(B) Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of the cavities as indicated.


Shell size	Insert arrangements	Contact cavities
8	(B) 03	1, 2, 3
(B) 10	06	1, 2, 3, 4, 5, 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

(B) Connector accessories: See MIL-C-85049.

RFI spring strip shall have a minimum of six fingers per inch and shall point to the rear of connector.

(B) Part or Identifying Number (PIN) example:

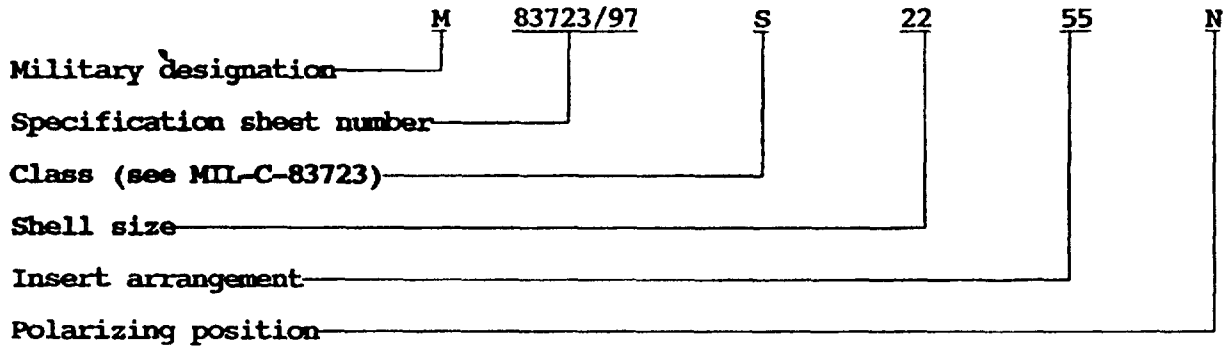

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-30)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.