MIL-DTL-83776B (USAF)
19 March 2001
SUPERSEDING
MIL-H-83776A(USAF)
28 June 1985

DETAIL SPECIFICATION

HELMET, FLYER'S, WINTER

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers type B-9B flyer's helmet

1.2 Classification. The helmet will be furnished in the following sizes (see 6.2).

Size	Equivalent Size
Small	23 ± 1/2 inch
Medium	24 ± 1/2 inch
Large	25 ± 1/2 inch
Extra large	26 ± 1/2 inch

1.2.1 The size measurements of the finished helmets will be in strict accordance with the measurements specified above and in the tabulation block of AF Drawing 51D24313. Measurements will be taken with the ear flaps up on the crown.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, ATTN: DSCP-CRFD, 700 Robbins Avenue, Bldg 6D, Philadelphia, PA 19111-5094 by using the Standardization Document Improvement Proposal appearing at the end of this document or by letter..

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

SPECIFICATIONS

FEDERAL

A-A-50294	Thread, Cotton
V-T-295	Thread, Nylon
MIL-DTL-32075	Label, For Clothing, Equipage and Tentage, (General Use)

MILITARY

MIL-W-530	Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-C-4294	Cloth, Nylon, Twill
MIL-C-6590	Cloth, Pile (Synthetic Mouton, Knitted)
A-A-52074	Cloth, Satin, Acetate or Rayon Face and Rayon or Cotton Back

DRAWINGS

AIR FORCE

51D24313	Helmet, Aircrew, Sage Green, Nylon, Winter, Type B-9B

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1 Government publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

(Single copies of this specification, other Federal specifications, and commercial item descriptions required by Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Federal Regulations:

Rules And Regulations Under The Wool Products Labeling Act of 1939

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless specific issue is identified, the issue in effect on date of invitation for bid or request for proposal will apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 6193 Stitches, Seams and stitching

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

3. REQUIREMENTS

3.1 First article. The requirements for the first article will be as specified by the procuring activity (see 6.2). The first article shall be examined for compliance with visual and dimensional requirements of this specification.

3.2 Materials.

3.2.1 Recycled, recovered, or environmentally preferable material. Recycled, recovered, or environmentally preferable materials are used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.2.2 Outershell. The fabric for the outershell will be cloth, nylon twill conforming toType I, Class A, of MIL-C-4294. The color will be USAF, Sage Green No. 1511.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

3.2.3 Innershell. The fabric for the innershell (lining) will be cloth, satin acetate or rayon face and rayon or cotton back (Type I or II) per A-A-52074. The color will be USAF Sage Green No. 1529 or the color will approximate that of the outershell.

3.2.4 Mouton. The color will be USAF, Sage Green No. 1523. The synthetic fur mouton MIL-C-6590, Type I, except that the ground fabric may be constructed of either cotton or polyester yarn and the backing compound may be Butadiene Styrene. As an alternate, the color color of the natural mouton may approximate the color of the synthetic mouton.

3.2.5 Webbing. The webbing for the chin strap will be cotton, 3/4 inch wide, conforming to MIL-W-530, Type IIa, Class 3. The color will match the outershell fabric.

3.2.6 Fasteners, snap. The snap fastener used for chin strap closure will consist of a button, socket, stud, and eyelet as referenced on AF Drawing 51D24313.

3.2.7 Reinforcements. Reinforcements for the snaps will be 1-1/2 X 1-1/2 inch wide webbing, conforming to MIL-W-530, Type IIa, Class I, or scrap pieces from the innerlining.

3 2.8 Threads.

3.2.8.1 Thread, cotton. The cotton thread used for hand stitching will conform to A-A-50294 3 ply. The color will approximate USAF Sage Green No. 1529 or the color of the outershell material (Sage Green no. 1511).

3.2.8.2 Thread, nylon. The nylon thread will conform to V-T-295, Type I or II, Class 1, size B. The color will be USAF, Sage Green No. 1511.

3.2.8.3 The dyed threads will show fastness to laundering and light equal to or better than the standard sample. When no standard sample is available, the dyed thread will show "good" fastness to laundering and light.

3.2.9 Label. The helmet will contain a combination identification-size label conforming to the requirements of MIL-DTL-32075, Type VI, class 4 for dry cleaned items. The label will include the information required by the Wool Labeling Act of 1939. The label will be imprinted DRY CLEAN ONLY.

3.2.9.1 Label/tag. Each item will be individually bar coded with a paper tag for personal clothing items. The paper tag will be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags will have a smooth finish to accept thermal transfer and direct printing. The tags will have a hole and shall be attached to each item by a fastener, clearly legible and readable by scanner. The bar coding element will be a 13 digit national stock number (NSN). There will be a 12 digit unit price control number (UPC) assigned for NSN's by the procuring agency. The initial letters UPC must

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

appear beneath the code. The bar code NSN and UPC type will be a medium to high code density and will be located so that it is completely visible on the item when it is folded an/or packaged as specified and so that it causes no damage to the item.

3.3 Patterns. Standard patterns, which provide 1/4 inch seam allowance will be furnished by the Government and will not be altered in any way. They will be used only as a guide for cutting the supplier's working patterns which will be identical to the standard patterns.

3.3.1 List of pattern parts. The pattern components for the helmet will be cut from materials as specified and according to the number of parts listed in Table I.

TABLE I. List of Pattern Parts.

Material	Pattern Nomenclature	Cut Parts
Mouton	Neck and ear panel	1
Mouton	Chin strap guard	1
Mouton	Front panel	1
Cloth Nylon	Rear panel outershell	1
Cloth Nylon	Side panel outershell, face up	1
Cloth Nylon	Side panel outershell, back up	1
Cloth Nylon	Front panel outershell	1
Cloth Satin, Acetate or Rayon	Rear panel innershell	1
Cloth Satin, Acetate or Rayon	Side panel innershell, face up	1
Cloth Satin, Acetate or Rayon	Front panel innershell	1
Cotton Webbing	Chin strap (see 51D24313)	1

3.3.2 Marking. The components of the helmet will be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

a. Corrosive metal fastening devices
b. Sew-on type tickets
c. Adhesive type tickets which discolor or adhere to the material upon removal of the tickets.

3.3.3 All parts will be marked, ticketed or bundled to insure uniform shade throughout the helmet. When the bundle system is used, plies from each bolt of fabric will be separated (in the spreading) by tissue paper or other identifying medla and the parts, after cutting will be so segregated that each bundle will contain only parts cut from the same piece of material. The bundles must be identified so that all the components for each end item will be from the same piece of material.

3.4 Design. The helmet is a fully lined cold weather head covering, having a four-piece crown, mouton forehead, earflaps with a webbing chin strap that closes with snap fasteners
(see Figure 1).


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

3.4.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and Figure 1, the written specification will govern.


3.5 Stitches, seams and stitching. All stitches, seam and stitching types specified in Table II will conform to ASTM-D6193. When two or more methods of seams or stitches are given for the same operation, anyone may be used.

3.5.1 Stitches per inch. The minimum and maximum number of stitches per inch will be as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

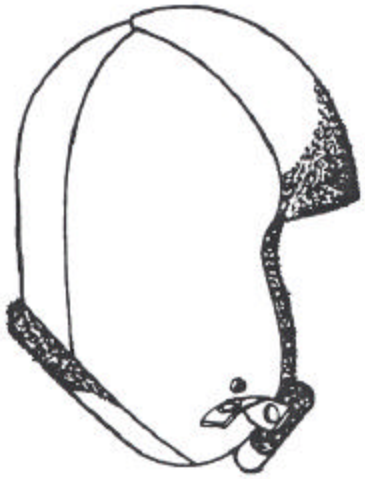

SIDE

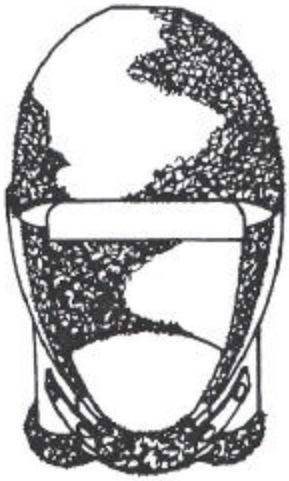

FRONT

FIGURE 1. HELMET, FLYING, WINTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

3.5.2 Thread breaks and ends of seams. Ends of all seams and stitching will be back tacked not less than 1/4 inch. Ends of continuous line of stitching will overlap not less than 1/2 inch. Thread breaks will be secured by stitching back of the break not less than 1/2 inch, unless otherwise specified.

TABLE II. Construction of the Helmet.

No	Description of Operation	Stitch Type	Seams and Stitching Type	Stitch per Inch
1	Cutting a. Cut all parts in strict accordance with patterns furnished which show size for proper a of all parts. b. Cut the nylon outershell out of the same piece of material. c. Cut the satin, acetate or rayon all out of the same piece of material.			
2	Replacement of damaged parts. Replace at time of cutting any part containing damages such as holes, smashes, slubs or multiple floats. b. Replace any part damaged, during the manufacturing process, by a needle chew, cut, tear, hole, mend or burn.			
3.	Prepare helmet a. The helmet will consist of a four-panel innershell and a four-panel outershell with a mouton front panel. A webbing adjustment (chin strap) with mouton chin strap guard fastened to the outside side panels with four snap fasteners.			
.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of the Helmet.(con't)

No	Description of Operation	Stitch Type	Seams and Stitching Type	Stitch per Inch
4	Join seams of innershell			
	a. Join quadrants of the innershell as shown in section A-A of 51D24313 and leave one rear seam of the innershell open 4 inches.	301	SSa-1	8-12
	b. Abut the edges of the dart found on the neck and ear mouton panel and stitch together with a blind stitch. Stitch the top portion of the mouton panel to the innershell as shown in Section B-B of 51D24313; i.e., stitch mouton to midsection of the quadrants and turn mouton back so that edges of mouton follow the bottom edges of the innershell. Stitch around the edge.	304 or 301 or 501	SSa-1	8-12
5	Label.			
	Sew instructions, size and 1dentificaition label (on all four sides not more than 3/16 inch from edges) to center of innershell 1/2 +1/16 inch above the back seam of the mouton.	301	LSbj-1	8-12
6.	Abut the edges of the darts found in the front mouton panel and blindstitch together Stitch mouton front panel to front panel of outer shell.	301 or 401 or 501	SSa-1	8-12
7.	Join seams of outershell (see 51D24313 sections A-A and C-C).	301 or 401		8-12
8.	Install the four studs, eyelets and reinforcement to outer shell and reinforcement webbing (ref 51D24313).			
9.	Join the inner and outer head pieces			
	a. The lining will be caught to the outershell by using machine made bartacks 5/16 inch long	Bartack		21 per Bartack

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of the Helmet.(con't)

No	Description of Operation	Stitch Type	Seams and Stitching Type	Stitch per Inch
9.	Join the inner and outer head pieces (con't)			
	at the following three places: Center top where the quarter seams meet and on each back quarter seam l/4 + l/8 inch above the mouton. The center top may be tacked by machine.		SSa-1	8-12
	b. Place the outer and innershells face to face and sew together around entire edge seam and close by hand stitching.	301 or 401		7-10
	c. Turn helmet through the 4 inch open seam and close by hand stitching.	Hand or 301	SSc-1	8-12
10.	Chin strap			
	The chin strap will be fabricated by using one piece of webing with raw edges of webbing abutting each other at the center of the strap underneath the mouton chin strap guard. In the course of sewing, the mouton portion to the webbing, the raw edges of webbing will be securely caught in the stitching.			
11	Cleaning			
	a. Remove any spots.			
	b. Remove all thread ends.			
.				
12.	Closing			
	Fasten all snap fasteners.			

3.6 Construction. The helmet will be constructed with all the operations listed in Table II. The contractor is not required to follow the exact sequence of operations listed, provided the finished helmet is identical to that produced by the following sequence of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The finished helmet will conform to the quality of product established by this specification. The occurrence of defects will not exceed the applicable accepted quality levels.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herin are classified as follows:

a. First article inspection (see 4.2).
b. Acceptance criteria (see 4.3).

4.2 First article inspection. When a first article is required (see 3.1 and 6.2), it will be examined for the defects specified in 4.4 and 4.5.

4.3 Acceptance criteria. Acceptance criteria will be performed as specified in the contract or purchase order.

4.4 Component and material inspection. In accordance with 4.1, components and materials will be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.5 End item visual examination. The end items will be examined for the defects listed in Table IV. The lot size will be expressed in units of helmets. The sample unit will be one helmet.

TABEL IV. End item visual defects

Defects	Classification		
	Major	Minor	
		A	B
Cleanness			
a. Spot or stain of a permanent nature on outside	X		
b. Removable spot or stain, clearly noticeable		X	
c. Three thread ends not trimmed, or loose threads or one or more shade tickets not removed			X
d. Shade stamp marking exposed on outside	X		
Components and assembly			
a. Any defective component	X		
b. Any component part omitted	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABEL IV. End item visual defects (con't)

Defects	Classification		
	Major	Minor	
		A	B
Components and assembly (con't)			
Any required operation omitted or improperly performed	X		
Cutting			
Any component part not cut in accordance with directional lines indicated on patterns or specified requirements	X		
Handtacks or machinetacks			
Omitted or misplaced|			
- 1 tack			X
- 2 tacks		X	
- 3 tacks	X		
Label-identification-size			
a. Missing or incorrect		X	
b. Not securely attached			X
c. Wool content not included			X
Material defects and workmanship damages (see note)			
a. Any weakening defect such as a smash, multiple float, or slub that may develop into a hole	X		
b. Shade bars, slubs, dye or finishing streaks	X		
c. Hole, cut, tear, mend or burn, or a needle chew that may develop into a hole	X		
d. Ruptured fibers in the line of sewing (usually caused by broken, blunt or hooked needles) affecting appearance or serviceability		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

NOTE: Material defects and workmanship damages are to be classified as indicated when the defect definitely weakens fabric. If the defect does not definitely weaken the fabric but the defect is conspicuous when the item is worn, classify the defect as indicated. Material defects or workmanship damages which are inconspicuous and do not definitely weaken the fabric shall not be classified as defects.

TABEL IV. End item visual defects (con't)

Defects	Classification		
	Major	Minor	
		A	B
Seams and stitching			
a. Accuracy of seaming			
1. Seam twisted, puckered or pleated			
(a) Seriously affecting appearance		X	
(b) Affecting appearance, but not seriously			X
2. Part of garment caught in any unrelated operation or stitching	X		
3. Thread(s) used on outside not same shade or not satisfactorily matching shade of garment		X	
4. Three thread breaks or end(s) of stitching (when not caught in other seams or stitching) not backstitched 1/4 inch		X	
b. Gage of stitching (edge, top or raise stitching)			
1. Not within range of gage specified or varies more than 1/16 inch when no range is specified			X
c. Open seam. A break in a line of stitching or continuous skipped or run-off stitches (except on edge, top or raise stitching) constitute an open seam.			
1. On joining seam(s)			
- over l/8 inch to and including l/4 inch		X	
- over l/4 inch to and including l/2 inch	X		
- over l/2 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABEL IV. End item visual defects (con't)

Defects	Classification	
	Major	Minor
		A B
Open seam (con't)		
2. On hem(s)		
- over l/4 inch to and including1/2 inch		X
- over l/2 inch		X
d. Stitches skipped or broken (on edge, top or raise stitching when seam is seamed, turned and stitched)		
- over l/4 inch to and including 1/2 inch		X
- over 1/2 inch		X
e. Raw edges. A raw edge is classified as such when it occurs along an edge required to be turned under but the edge is not securely caught in the stitching.		
1. On outside		
- over l/8 inch to and including l/4 inch		X
- over l/4 inch	X	
2. On inside		
- over l/2 inch to and including 2 inches		X
- over 2 inches		X
f. Run-offs		
1. On joining seams, when resulting in an open seam, score as "open seam"		
2. On edge, top or raise stitching when not resulting in open seam (outside only)		
- over 1/2 inch to and including l inch		X
- over l inch		X
g. Not specified seam or stitch type		X
h. Stitch tension. (Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABEL IV. End item visual defects (con't)

Defects	Classification		
	Major	Minor	
		A	B
Stitch tension. (con't)			
1. Loose tension, resulting in a loose seam	X		
2. Loose tension on edge, top or raise stitching, recognized by loosely exposed loops of top or lower thread.		X	
3. Tight tension (stitches break when normal strain is applied to seam or stitching).		X	
i Stitches per inch. (To be scored only when the condition exists on major portion of seam or stitching)			
1. Less than minimum number permitted by minus tolerances:			
- 1 stitch			X
- 2 stitches		X	
- 3 or more stitches	X		
2. More than maximum number permitted by plus tolerance:			
- 2 stitches			X
- 3 stitches		X	
- 4 or more stitches	X		
Shaded parts			
a. Shade varying within a part seriously affecting appearance.	X		
b. Shade varying between two or more parts affecting appearance.	X		
Snap fasteners			
a. Sockets			
1. One or more omitted, defective or improperly clinched	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABEL IV. End item visual defects (con't)

Defects	Classification	
	Major	Minor
		A B
Sockets (con't)		
2. Alignment		
- one or more sockets out of alignment with stud seriously	X	
- affecting appearance.		
b. Studs		
One or more omitted, defective or improperly clinched.	X	

4.6 Size measurements. Any measurement deviating from the nominal dimension and tolerance in table of measurements will be scored as a size measurement defect.

4.7 Packaging examination. The fully packaged end items will be examined for the defects listed below. The lot size will be expressed in units of shipping containers. The sample unit will be one shipping container fully packaged.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence of method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as 1ncomplete closure of case liners, container flaps, loose strapping, inadequate stapling, bulging or distortion of containers.
Content	Number of bundles per container is more or less than required. Number of helmets per bundle is more or less than required. it Size shown on one or more helmets not as specified on outer container. 1/

1/ For this defect, two bundles from each container in the sample will be examined.

5. PACKAGING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

5.1 Packaging. For acquisition purposes, the packaging requirements willl be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain

requisite packaging requirements. Packaging requirements are maintained by Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's or Defense System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The helmet covered by this specification is intended for wear by male military flyers. It is worn alone or as a liner for the helmet in cold weather.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. First article as specified (see 3.1).

6.3 First article. When a first article is required, it will be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to standard samples, address the contracting activity issuing the invitation for bids.

6.5 International standardization agreements. Certain provisions of this specification are the subject of international standardization agreement as cited in NATO, STANAG No. 2333. When amendment, revision, or cancellation of this specification is proposed which will modify the international agreement concerned, the preparing activity will take appropriate action through international standardization channels, including departmental standardization offices, to change the agreement or make other appropriate accommodations.

6.6 Changes from previous issue. Notaions are not used in this revision to identify changes, with respect to the previous issue due to the extensiveness of the changes.

6.7 Subject Term (key word) Listing
Helmet liner
Headgear
Coldweather
Earflap

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 99

Preparing Activity:
DLA-CT

Project No. 8415-0220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-83776B	**2. DOCUMENT DATE** **2001 MARCH 19**

DOCUMENT TITLE
HEMET, FLYER'S, WINTER

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYYYMMDD)

8. PREPARING ACTIVITY

NAME Defense Supply Center Philadelphia ATTN: DSCP-CRFD (BLDG 6, AREA D)	b. TELEPHONE *Include Area Code)* (1) Commercial 215 737 7053 (2) AUTOVON 444-7053
c. ADDRESS *(Include Zip Code)* 700 Robbins Ave Philadelphia, PA 19111- 5096	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman road, Suite 2533 Ft. Belvoir, VA 22060-2533 Telephone (703) 767-6888 AUTOVON 427-6888

DD Form 1426, FEB 1999 (EG) PREVIOUS EDITION IS OBSOLETE
WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.