| INCH-POUND |


MIL-R-83726/22C(USAF)
15 June 1992
SUPERSEDING
MIL-R-83726/22B(USAF)
7 JANUARY 1986

MILITARY SPECIFICATION SHEET

RELAYS, SOLID STATE, REPEAT CYCLE TIMER, TYPE IV, CLASS C, SPST, 250 MILLIAMPERES

This specification is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-83726.

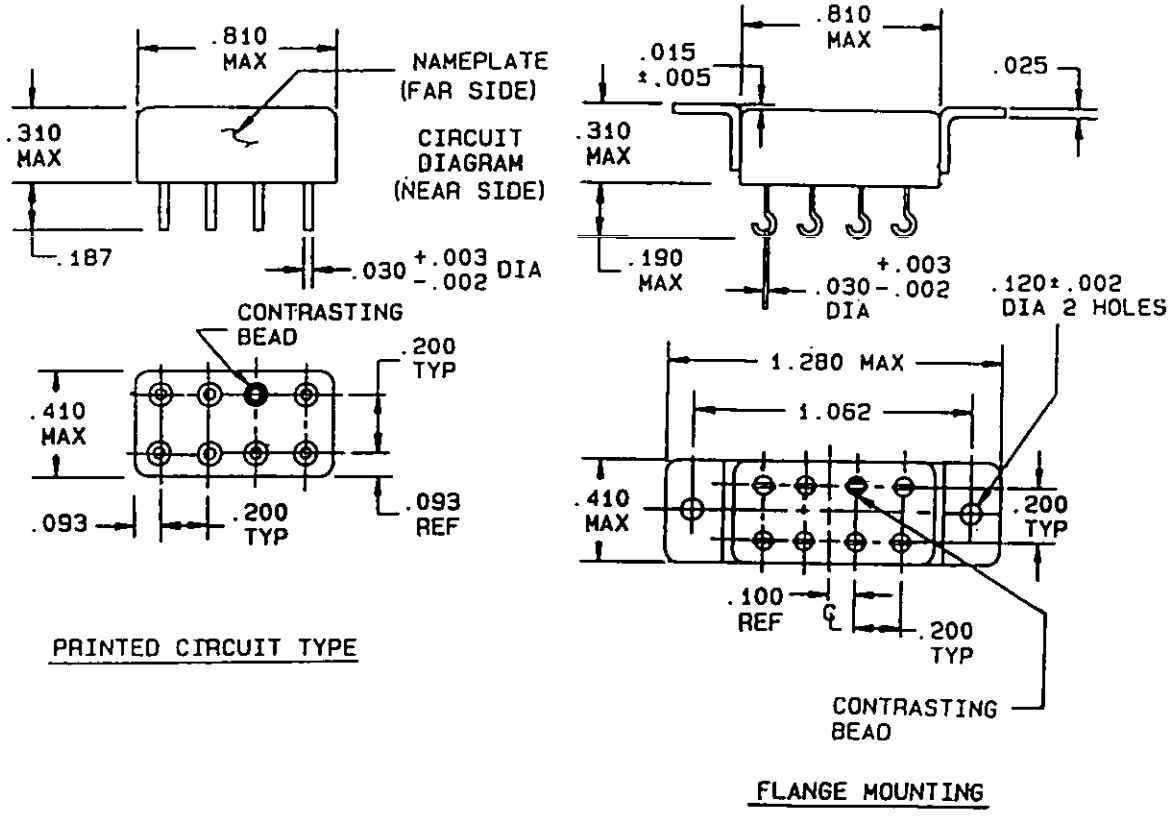


(C) FIGURE 1. Dimensions and configurations.

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:29Z
Check the source to verify that this is the current version before use.

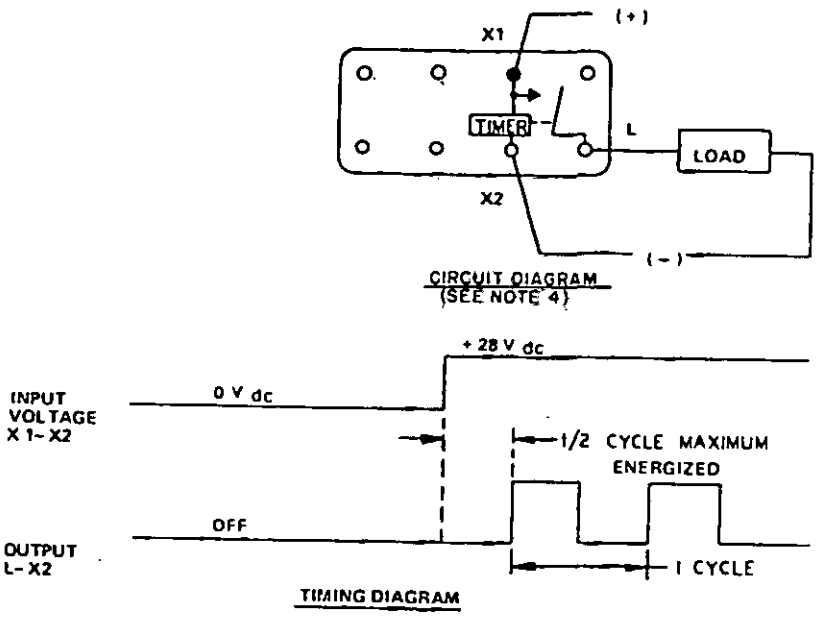

Inches	mm	Inches	mm
.002	0.05	.187	4.75
.003	0.08	.190	4.83
.010	0.25	.200	5.08
.025	0.64	.310	7.87
.030	0.76	.410	10.41
.093	2.36	.810	20.57
.100	2.54	1.062	26.97
.120	3.05	1.280	32.51

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.76 mm) for two place decimals.
4. Spare terminals are connected internally. Do not use for external tie points or for terminals.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

OPERATING DATA:

Timing action: Repeat cycle.

Cycle rate: 10 maximum per second; 1.0 minimum per 60 seconds; on time 50 percent.

Timing accuracy 1/: 10 percent of the total cycle time.

Recycle time 2/: 10 milliseconds.

INPUT DATA:

Input voltage: 28 V dc nominal; range 18 to 32 V dc.

Duty rating: Continuous.

Current drain: 5 milliamperes maximum plus load at 25°C.

Polarity protection: The timer shall be inoperative during, and undamaged by, reversal of the polarity of the operating voltage.

OUTPUT DATA:

Configuration: SPST; switch closure to +28 V dc.

Rating: Equivalent of two MS25237-387 lamps in parallel.

Suppression: Inductive suppression provided for output protection.

Voltage drop: 2 V dc maximum.

Endurance: 1,000,000 cycles minimum for test.

Qualification: 2,000 hours or 1,000,000 cycles, whichever is less.

Group B: 1,000 hours or 1,000,000 cycles, whichever is less.

1/ The accuracy requirement applies for any combination of operating temperature and voltage.
2/ Recycle time is defined as the maximum time that power must be removed from the input terminals to assure that the next timing cycle will be completed within the specified timing tolerance. (Units can be recycled during timing or after time-out).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:29Z
Check the source to verify that this is the current version before use.

ELECTRICAL DATA:

Transients: MIL-STD-704, figure 9, limit 1, duty cycle 2 percent for category B equipment.

Spike:

Self generated: None.

Susceptibility: +80 V maximum; -600 V maximum.

Radio noise: MIL-STD-461, class 1D.

Motor load: Not applicable.

Insulation resisance: 1,000 megohms at 500 V dc at sea level, and 100 V dc at 80,000 feet between each pin and case.

Dielectric strength: 1,000 V rms at 60 Hz at sea level, and 350 V rms at 80,000 feet between case and pins connected together.

ENVIRONMENTAL DATA:

Ambient temperature (operating or nonoperating): -55°C to +125°C.

Vibration (sinusoidal): 10 to 80 Hz at 0.06 inch decimal to analog (DA); 80 to 3,000 Hz at 30 G's.

Vibration (random): MIL-STD-202, method 214, condition I, letter J, duration of 30 minutes.

Shock: 1,100 G's for 0.5 millisecond.

Acceleration: 100 G's, any axis.

Seal: MIL-STD-883, method 1014, conditions B and C, except for gross leak, step 2.

Moisture resistance: MIL-STD-202, method 106.

PHYSICAL DATA:

Dimensions and configurations: See figure 1.

Terminations: See figure 1.

Terminal strength: 3 pounds pull.

Weight: 0.5 ounce.

© Marking: In accordance with MIL-R-83726. In addition, relays shall be marked with the ESDS identifier as specified in MIL-STD-1285.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:29Z
Check the source to verify that this is the current version before use.

© Part or Identifying Number (PIN): The PIN consists of the prefix MIL-R-83726/22-, a four-digit dash number denoting the length of one complete cycle (expressed in milliseconds), and a suffix letter from table I (indicating the extent of EMI requirements and quality level) as follows:

M 83726/22- 1001 W

Military designator

Specification sheet number

The first three numbers are significant. The fourth is the number of zeros to follow the first three digits. (The time is expressed in milliseconds and converted to seconds.) See examples following table I.

Suffix letter from table I. 3/

For quality level and mounting style, refer to MIL-R-83726.

TABLE I. Suffix letters for quality level, printed circuit mounting and flange mounting.

Quality level	Printed-circuit mounting style	Flange mounting style
W	W	A
Y	Y	B
X	X	C

Examples:

M83726/22-1000W - Time delay repeat cycle 1 per 100 ms with W quality level and printed-circuit mount.

M83726/22-2500A - Time delay repeat cycle 4 per second with W quality level and flange mount.

M83726/22-6002Y - Time delay repeat cycle 1 per 60 seconds with Y quality level and printed-circuit mount.

3/ Relays numbered prior to the date of this specification which do not include a quality level indication shall be considered interchangeable (store and issue) with the W quality level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:29Z
Check the source to verify that this is the current version before use.

© ESDS protection program: An ESDS protection program shall be implemented within 6 months of the date of revision C to this document. The manufacturer shall establish and maintain an ESD control program in accordance with MIL-STD-1686 for mission critical equipment. Evidence of such compliance shall be verified by the qualifying activity of this specification as a prerequisite for qualification and continued qualification. This program shall be documented by an ESD control plan which must be under document control. As a minimum, this plan must address the identification of ESDS sub-components and end items, facilities, training, design protection, handling procedures, marking, cleaning, preservation, packaging, and quality assurance. A model ESD control program is available from the qualifying activity and may be used as a guideline. Further guidance for ESD control is available from the EOS/ESD Association and the Electronics Industry Association (EIA). This requirement is applicable to all manufacturers who handle ESDS component parts and materials in the relay manufacturing or testing process. This requirement is not limited to manufacturers qualifying ESDS end items.

© ESDS verification: As a part of qualification or qualification after redesign, ESD testing shall be done in accordance with method 3015 of MIL-STD-883 modified to test at 16,000 volts. Testing at lower voltage levels is not required. This testing shall be accomplished as part of the group III for qualification inspection and as part of the group C inspection.

© ESDS preservation and packaging: Relays shall be preserved and packaged in such a manner as to ensure that the integrity of ESD sensitive relays is not diminished. ESD sensitive relays shall be preserved and packaged in accordance with the requirements of MIL-STD-1686.

CONCLUDING MATERIAL

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5945-F732-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:29Z
Check the source to verify that this is the current version before use.