INCH-POUND
MIL-C-62/3D
21 November 2007
SUPERSEDING
MIL-C-62/3C
12 February 2003


MILITARY SPECIFICATION SHEET

# CAPACITORS, FIXED, ELECTROLYTIC (DC, ALUMINUM, DRY ELECTROLYTE, POLARIZED) STYLES CE31 AND CE34

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-62.

Inactive for design
after 27 March 1979

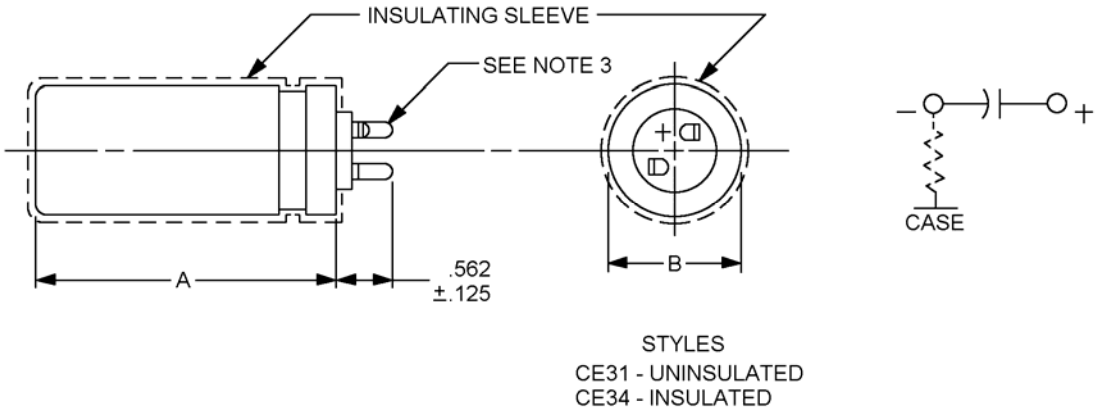


STYLES
CE31 - UNINSULATED
CE34 - INSULATED

| Inches | mm |
|---|---|
| .125 | 3.18 |
| .562 | 14.27 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Shape and position of lugs optional.
4. Capacitors are mounted by means of a mounting ring. (Family 2).
5. There is an indeterminate resistance between the metal case and the negative terminal.

FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CE31 and CE34 capacitors.

| PIN 5/ | Capaci-tance | DC Rated voltage | DC leakage current | Maximum impedance | Dissipation factor | Case dimensions 1/ 4/ | |
|---|---|---|---|---|---|---|---|
| | | | | | | A | B |
| | | | | | | ±. 062) (1.57) | ±. 016 (.41) |
| | uF | volts | uA | ohms | percent | inches | inches |
| CE3-C101E | 100 | 15 | 58 | 280 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C151E | 150 | 15 | 71 | 187 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C271E | 270 | 15 | 95 | 104 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C331E | 330 | 15 | 105 | 85 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C471E | 470 | 15 | 126 | 60 | 20 | 1.750 2/ (44.45) | 1 000 (25.40) |
| CE3-C681E | 680 | 15 | 153 | 41 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-CI02E | 1,000 | 15 | 183 | 28 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C152E | 1,500 | 15 | 225 | 19 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C222E | 2,200 | 15 | 273 | 13 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C332E | 3,300 | 15 | 332 | 8.5 | 20 | 2.500 (63.50) | 1.375 (34.93) |
| CE3-C472E | 4,700 | 15 | 399 | 5.9 | 20 | 3.250 (82.55) | 1.375 (34.93) |
| CE3-C682E | 6,800 | 15 | 480 | 4.1 | 20 | 4.250 3/ (107.95) | 1.375 (34.93) |
| CE3-C270F | 27 | 25 | 39 | 550 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C470F | 47 | 25 | 51 | 314 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C680F | 68 | 25 | 62 | 218 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C101F | 100 | 25 | 75 | 148 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C151F | 150 | 25 | 92 | 99 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C221F | 220 | 25 | 110 | 67 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C271F | 270 | 25 | 123 | 55 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C331F | 330 | 25 | 136 | 45 | 20 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C471F | 470 | 25 | 162 | 31 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C681F | 680 | 25 | 195 | 22 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C911F | 910 | 25 | 226 | 16 | 20 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C102F | 1,000 | 25 | 237 | 15 | 20 | 2.250 (57.15) | 1.375 (34.93) |

See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CE31 and CE34 capacitors.

| PIN 5/ | Capaci-tance | DC Rated voltage | DC leakage current | Maximum impedance | Dissipation factor | Case dimensions 1/ 4/ | |
|---|---|---|---|---|---|---|---|
| | | | | | | A | B |
| | | | | | | ±. 062) (1.57) | ±. 016 (.41) |
| | uF | volts | uA | ohms | percent | inches | inches |
| CE3-C122F | 1,200 | 25 | 260 | 12 | 20 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C152F | 1,500 | 25 | 291 | 10 | 20 | 3.000 (76.20) | 1.375 (34.93) |
| CE3-C222F | 2,200 | 25 | 352 | 6.7 | 20 | 3.500 (88.90) | 1.375 (34.93) |
| CE3-C332F | 3,300 | 25 | 425 | 4.5 | 20 | 4.250 2/ (107.95) | 1.375 (34.93) |
| CE3-C101G | 100 | 50 | 106 | 148 | 15 | 1.750 (44.45) | 1.000 (25.40) |
| CE3-C151G | 150 | 50 | 130 | 99 | 15 | 1.750 (44.45) | 1.000 (25.40) |
| CE3-C221G | 220 | 50 | 157 | 67 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C361G | 360 | 50 | 201 | 41 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C471G | 470 | 50 | 230 | 31 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C681G | 680 | 50 | 276 | 22 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C751G | 750 | 50 | 290 | 20 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CES-C102G | 1,000 | 50 | 336 | 15 | 15 | 3.000 (76.20) | 1.375 (34.93) |
| CE3-C152G | 1,500 | 50 | 411 | 10 | 15 | 3.500 (88.90) | 1.375 (34.93) |
| CE3-C680H | 68 | 100 | 124 | 130 | 15 | 1.750 (44.45) | 1.000 (25.40) |
| CE3-C101H | 100 | 100 | 150 | 88 | 15 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C151H | 150 | 100 | 183 | 59 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C221H | 220 | 100 | 222 | 40 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C331H | 330 | 100 | 271 | 27 | 15 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C431H | 430 | 100 | 310 | 21 | 15 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C471H | 470 | 100 | 325 | 19 | 15 | 3.000 (76.20) | 1.375 (34.93) |
| CE3-C681H | 680 | 100 | 391 | 13 | 15 | 3.750 (95.25) | 1.375 (34.93) |
| CE3-C470J | 47 | 150 | 126 | 187 | 12 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C820J | 82 | 150 | 166 | 107 | 12 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C101J | 100 | 150 | 183 | 88 | 12 | 2.750 (69.85) | 1.000 (25.40) |

See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CE31 and CE34 capacitors.

| PIN 5/ | Capaci-tance | DC Rated voltage | DC leakage current | Maximum impedance | Dissipation factor | Case dimensions 1/ 4/ | |
|---|---|---|---|---|---|---|---|
| | | | | | | A | B |
| | | | | | | ±. 062) (1.57) | ±. 016 (.41) |
| | uF | volts | uA | ohms | percent | inches | inches |
| CE3-C201J | 200 | 150 | 260 | 44 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C271J | 270 | 150 | 302 | 33 | 12 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C331J | 330 | 150 | 332 | 27 | 12 | 3.000 (76.20) | 1.375 (34.93) |
| CE3-C471J | 470 | 150 | 398 | 19 | 12 | 3.750 (95.25) | 1.375 (34.93) |
| CE3-C680K | 68 | 200 | 175 | 129 | 12 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C820K | 82 | 200 | 192 | 107 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C101K | 100 | 200 | 211 | 88 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C151K | 150 | 200 | 259 | 59 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C221K | 220 | 200 | 312 | 40 | 12 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C331K | 330 | 200 | 386 | 27 | 12 | 3.250 (82.55) | 1.375 (34.93) |
| CE3-C471K | 470 | 200 | 460 | 19 | 12 | 4.2503/ (107.95) | 1.375 (34.93) |
| CE3-C330M | 33 | 250 | 136 | 266 | 12 | 1.750 (44.45) | 1.000 (25.40) |
| CE3-C101M | 100 | 250 | 237 | 88 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C151M | 150 | 250 | 290 | 59 | 12 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C221M | 220 | 250 | 352 | 40 | 12 | 3.250 (82.55) | 1.375 (34.93) |
| CE3-C331M | 330 | 250 | 430 | 27 | 12 | 4.250 3/ (107.95) | 1.375 (34.93) |
| CE3-C150N | 15 | 300 | 101 | 585 | 12 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C220N | 22 | 300 | 122 | 400 | 12 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C330N | 33 | 300 | 148 | 266 | 12 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C470N | 47 | 300 | 178 | 187 | 12 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C750N | 75 | 300 | 225 | 117 | 12 | 2.500 (57.15) | 1.375 (34.93 |
| CE3-C121N | 120 | 300 | 285 | 73 | 12 | 2.500 (63.50) | 1.375 (34.93) |
| CE3-C151N | 150 | 300 | 318 | 59 | 12 | 3.000 (76.20 | 1.375 (34.93) |
| CE3-C221N | 220 | 300 | 386 | 40 | 12 | 3.750 (95.25) | 1.375 (34.93) |

See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CE31 and CE34 capacitors.

| PIN 5/ | Capaci-tance | DC Rated voltage | DC leakage current | Maximum impedance | Dissipation factor | Case dimensions 1/ 4/ | |
|---|---|---|---|---|---|---|---|
| | | | | | | A | B |
| | | | | | | ±. 062) (1.57) | ±. 016 (.41) |
| | uF | volts | uA | ohms | percent | inches | inches |
| CE3-C100P | 10 | 350 | 88 | 880 | 12 | 1.750 2/ (44.45) | 1.375 (25.40) |
| CE3-C270P | 27 | 350 | 146 | 326 | 12 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C330P | 33 | 350 | 161 | 266 | 12 | 2.750 (69.85) | 1.000 (25.40) |
| CE3-C470P | 47 | 350 | 192 | 187 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3 -C680P | 68 | 350 | 232 | 129 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C820P | 82 | 350 | 254 | 107 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C101P | 100 | 350 | 280 | 88 | 12 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C121P | 120 | 350 | 308 | 73 | 12 | 3.000 (76.20) | 1.375 (34.93) |
| CE3-C151P | 150 | 350 | 345 | 59 | 12 | 3.500 (88.90) | 1.375 (34.93) |
| CE3-C221P | 220 | 350 | 416 | 40 | 12 | 4.250 3/ (107.95) | 1.375 (34.93) |
| CE3-C100Q | 10 | 400 | 94 | 1,480 | 17 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C150Q | 15 | 400 | 116 | 986 | 17 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C220Q | 22 | 400 | 141 | 670 | 17 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C270Q | 27 | 400 | 156 | 550 | 17 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C390Q | 39 | 400 | 187 | 380 | 17 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C560Q | 56 | 400 | 222 | 264 | 17 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C680Q | 68 | 400 | 248 | 218 | 17 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C820Q | 82 | 400 | 271 | 180 | 17 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C101Q | 100 | 400 | 300 | 148 | 17 | 3.250 (82.55) | 1.375 (34.93) |
| CE3-C151Q | 150 | 400 | 368 | 99 | 17 | 4.250 3/ (107.95) | 1.375 (34.93 |

See footnotes at end of table



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CE31 and CE34 capacitors.

| PIN 5/ | Capacitance | DC Rated voltage | DC leakage current | Maximum impedance | Dissipation factor | Case dimensions 1/ 4/ | |
|---|---|---|---|---|---|---|---|
| | | | | | | A | B |
| | | | | | | ±. 062) (1.57) | ±. 016 (.41) |
| | uF | volts | uA | ohms | percent | inches | inches |
| CE3-C6R8R | 6.8 | 450 | 83 | 3,230 | 17 | 1.750 2/ (44.45) | 1.000 (25.40) |
| CE3-C150R | 15 | 450 | 123 | 1,465 | 17 | 2.250 (57.15) | 1.000 (25.40 |
| CE3-C270R | 27 | 450 | 168 | 815 | 17 | 2.250 (57.15) | 1.000 (25.40) |
| CE3-C330R | 33 | 450 | 182 | 666 | 17 | 2.250 (57.15) | 1.375 (34.93) |
| CE3-C470R | 47 | 450 | 217 | 468 | 17 | 2.750 (69.85) | 1.375 (34.93) |
| CE3-C680R | 68 | 450 | 262 | 323 | 17 | 3.250 (82.55) | 1.375 (34.93) |
| CE3-C820R | 82 | 450 | 289 | 268 | 17 | 3.500 (88.90) | 1.375 (34.93) |
| CE3-C101R | 100 | 450 | 318 | 220 | 17 | 4.250 3/ (107.95) | 1.375 (34.93) |

1/ Metric equivalents are given for general information only.

2/ Tolerance for this dimension shall be + .062 (1.57), -.125 (3.18).

3/ Tolerance for this dimension shall be +.062 (1.57), -.188 (4.78).

4/ Dimensions shown are for style CE31; for style CE34, add .062 (1.57) ± .062 (1.57) to the nominal dimension.

5/ Complete PIN shall include an additional digit to complete style.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case type: Tubular.

Capacitance value: See table I.

Capacitance tolerance:

At 200 volts, dc rated, and above: -10,+50 percent.

At 150 volts, dc rated, and less: -10,+75 percent.

Operating temperature range: -40°C to +85°C.

Solderability: Method 208 of MIL-STD-202.

DC leakage: See table I.

Capacitance: Method 305 of MIL-STD-202.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

Dissipation factor: See table I.

Terminal strength: Method 211 of MIL-STD-202, test conditions A, B, and E.

Shock (specified pulse): Method 213 of MIL-STD-202, test condition I.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B.

Salt atmosphere (corrosion): Method 101 of MIL-STD-202, test condition B.

Temperature cycling and immersion:

Thermal shock: Method 107 of MIL-STD-202, test condition A.

Immersion: Method 104 of MIL-STD-202, test condition C.

DWV (insulating sleeves): Method 301 of MIL-STD-202. 4,000 volts dc applied.

DCL: Not more than 150 percent of initial measurement.

Capacitance change: 5 percent.

DF: See table I.

Corrosion: Not more than 10 percent.

Moisture resistance: Method 106 of MIL-STD-202.

Insulation resistance (insulating sleeve): Not less than 100 megohms.

DWV (insulating sleeves): Method 301 of MIL-STD-202. 4,000 volts dc applied.

DCL: Not more than 150 percent of initial requirement.

Capacitance change: 5 percent.

DF: See table I.

Corrosion: Not more than 10 percent.

Stability at low and high temperature: In accordance with MIL-C-62.

Step 1 (at +25°C):

DCL: See table I.

Capacitance: See table I.

DF: See table I.

Step 2 (at -40°C):

Impedance: See table I.

Step 3 (at +25°C):



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

DCL: See table I.

Capacitance: ±5 percent of initial value.

DF: See table I.

Step 4 (at +85°C):

DCL: Not more than 10 times initial value, or meet initial +25°C requirement.

Capacitance: ±20 percent of initial value.

DF: See table I.

Step 5 (at +25°C):

DCL: See table I.

Capacitance: ±5 percent of initial value.

DF: See table I.

Surge voltage: In accordance with MIL-C-62.

DCL: See table I.

Capacitance change: 6 percent.

DF: See table I.

Vent: Not applicable.

Life: Method 108 of MIL-STD-202, test condition F.

DCL: See table I.

Capacitance change: 100 volts, dc rated, and less: -20, +15 percent.

DC rated voltage above 100 volts: ±15 percent.

DF: Meet the initial requirement or not exceed 150 percent of the initial measurement.

Barometric pressure: Method 105 of MIL-STD-202.

Shell life: In accordance with MIL-C-62.

Build factor: Not more than 4.0.

Shelf factor: Not more than 3. 0.

DCL: Not more than 150 percent of initial value.

Capacitance change: 6 percent.

DF: Not more than 150 percent of initial requirement.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

QUALIFICATION ASSURANCE PROVISIONS:

Qualification inspection: Not applicable.

Retention of qualification: Not applicable.

Conformance inspection: Group A inspection only.

Application data:

All capacitors shall withstand an rms ripple current at 120 Hz and 85°C as determined from the formula:

$$I_r = k\sqrt{C}$$

Where:

$I_r$ = rms ripple current in milliamps.
C = nominal capacitance in microfarads.
K = 50 for units rated at 15 to 150 volts dc, inclusive, for any case diameter.
= 35 for units rated at 200 to 300 volts dc, inclusive, for case diameter 1.0 inch.
= 30 for units rated at 350 to 450 volts dc, inclusive, for case diameter 1.0 inch.
= 50 for units rated at 200 to 350 volts dc, inclusive, for case diameter 1.375 Inches.
= 40 for units rated at 400 to 450 volts dc, inclusive, for case diameter 1.375 inches.

Supersession data: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

| Superseded PIN | Replacement style CE3 or CE34 | Superseded PIN | Replacement style CE31 or CE34 | Superseded PIN | Replacement style CE31 or CE34 |
|---|---|---|---|---|---|
| 001 | CE3-C101E | 046 | CE3-C470J | 091 | CE3-C151M |
| 002 | CE3-C151E | 047 | CE3-C680H | 092 | CE3-C221M |
| 003 | CE3-C271E | 048 | CE3-C100H | 093 | CE3-C331M |
| 004 | CE3-C331E | 049 | CE3-C100H | 094 | CE3-C100P |
| 005 | CE3-C471E | 050 | CE3-C150H | 095 | CE3-C151N |
| 006 | CE3-C681E | 051 | CE3-C221H | 096 | CE3-C220N |
| 007 | CE3-C681E | 052 | CE3-C331H | 097 | CE3-C330N |
| 008 | CE3-C102E | 053 | CE3-C331H | 098 | CE3-C470N |
| 009 | CE3-C152E | 054 | CE3-C431H | 099 | CE3-C750N |
| 010 | CE3-C152E | 055 | CE3-C471H | 100 | CE3-C750N |
| 011 | CE3-C222E | 056 | CE3-C681H | 101 | CE3-C101N |
| 012 | CE3-C222E | 057 | CE3-C100P | 102 | CE3-C121N |
| 013 | CE3-C332E | 058 | CES-C470J | 103 | CE3-C151N |
| 014 | CE3-C472E | 059 | CE3-C470J | 104 | CE3-C221N |
| 015 | CE3-C682E | 060 | CE3-C680K | 105 | CE3-C100P |
| 016 | CE3-C270F | 061 | CE3-C820J | 106 | CE3-C270P |
| 017 | CE3-C470F | 062 | CE3-C101J | 107 | CE3-C270P |
| 018 | CE3-C101F | 063 | CE3-C101J | 108 | CE3-C330P |
| 019 | CE3-C151F | 064 | CE3-C151K | 109 | CE3-C470P |
| 020 | CE3-C151F | 065 | CE3-C201J | 110 | CE3-C680P |
| 021 | CE3-C271F | 066 | CE3-C271J | 111 | CE3-C820P |
| 022 | CE3-C331F | 067 | CE3-C271J | 112 | CE3-C101P |
| 023 | CE3-C471F | 068 | CE3-C331J | 113 | CE3-C121P |
| 024 | CE3-C471F | 069 | CE3-C471J | 114 | CE3-C151P |
| 025 | CE3-C681F | 070 | CE3-C100P | 115 | CE3-C221P |
| 026 | CE3-C911F | 071 | CE3-C150N | 116 | CE3-C100P |
| 027 | CE3-C102F | 072 | CE3-C220N | 117 | CE3-C150Q |
| 028 | CE3-C122F | 073 | CE3-C330M | 118 | CE3-C200Q |
| 029 | CE3-C152F | 074 | CE3-C470N | 119 | CE3-C270Q |
| 030 | CE3-C222F | 075 | CE3-C680K | 120 | CE3-C390Q |
| 031 | CE3-C332F | 076 | CE3-C820K | 121 | CE3-C560Q |
| 032 | CE3-C470J | 077 | CE3-CI01K | 122 | CE3-C680Q |
| 033 | CE3-C470J | 078 | CE3-CI51K | 123 | CE3-C820Q |
| 034 | CE3-C680H | 079 | CE3-C221K | 124 | CE3-C101Q |
| 035 | CE3-C101G | 080 | CE3-C221K | 125 | CE3-C101Q |
| 036 | CE3-C151G | 081 | CE3-C331K | 126 | CE3-C151Q |
| 037 | CE3-C221G | 082 | CE3-C471K | 127 | CE3-C6R8R |
| 038 | CE3-C361G | 083 | CE3-C100P | 128 | CE3-C150R |
| 039 | CE3-C471G | 084 | CE3-C150N | 129 | CE3-C270R |
| 040 | CE3-C681G | 085 | CE3-C330M | 130 | CE3-C270R |
| 041 | CE3-C751G | 086 | CE3-C470N | 131 | CE3-C330R |
| 042 | CE3-CI02G | 087 | CE3-C470N | 132 | CE3-C470R |
| 043 | CE3-C152G | 088 | CE3-C680P | 133 | CE3-C680R |
| 044 | CE3-C470J | 089 | CE3-C820P | 134 | CE3-C820R |
| 045 | CE3-C470J | 090 | CE3-C101M | 135 | CE3-C101R |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.

NOTES:

Reference documents. In addition to MIL-C-62, this specification sheet references the following documents.

MIL-STD-202

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

CHANGES FROM PREVIOUS ISSUE The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA-CC

(Project 5910-2007-035)

Review activities:
Army - AT, AV, CR4, MI
Navy - AS, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil .



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:31Z
Check the source to verify that this is the current version before use.