MIL-STD-274B
15 MARCH 1963

SUPERSEDING
MIL-STD-274A
5 MARCH 1958

MILITARY STANDARD

GAGES, PLUG, THREAD SETTING, CLASS W,

FOR LO (NOT GO) GAGES

UNIFIED STANDARD CLASSES 2A AND 3A AND

AMERICAN NATIONAL STANDARD CLASS 3 EXTERNAL THREADS

FED. SUP. CLASS
5220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
WASHINGTON 25, D.C.

Gages, Plug, Thread, Setting, Class W, for LO (Not Go) Gages Unified Standard Classes 2A and 3A and American National Standard Class 3 External Threads

Mil-Std-274B

1. This standard has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force, effective 15 March 1963.

2. Recommended corrections, additions, or deletions should be addressed to Headquarters, DSA, Standardization Division, Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph		Page
1.	Scope	1
2.	Referenced Documents	1
3.	Definitions	2
4.	General Requirements	2
4.1.1	Tables I, II, and III - Tabulation of Design and Identification Data	2
4.1.2	Table IV - Listing of Mil-Std Part Numbers in Numerical Sequence	3
5.	Procurement	3

FIGURES

Figure		
1.	Truncated Thread Setting Plug Gage (Taperlock Type)	4
2.	Truncated Thread Setting Plug Gage (Trilock Type)	5

TABLES

Table		
I.	Tabulation of Design and Identification Data - Unified Standard Thread	7
II.	Tabulation of Design and Identification Data - American National Standard Thread	51
III.	Tabulation of Design and Identification Data - Special (UNS) Threads	65
IV.	Listing of Mil-Std Part Numbers in Numerical Sequence	67

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

1. Scope

1.1 This standard covers pertinent design data and Mil-Std Part Numbers for American Gage Design Standard truncated thread setting plug gages for LO (not go) gages for Unified Standard classes 2A and 3A and American National Standard class 3 external threads.

1.2 The minimum limits of certain standard external threads are identical for both the Unified Standard and American National Standard thread systems for the same nominal size threads per inch and class of fit. In these particular cases one part number is applicable and the thread designation is combined (For example: .5000-13UNC-3A-3 W).

1.3 The design data for truncated thread setting plug gages employs class "W" gage manufacturing tolerances in accordance with the U. S. Department of Commerce Handbook H28 'Screw-Thread Standards for Federal Services".

2. Referenced Documents

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of this standard.

Standard

Mil-Std-10 Surface Roughness Waviness and Lay

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.)

Specification

Mil-G-45654 Gages, Plug and Ring, Thread

(Copies of specifications should be obtained from the procuring activity or as directed by the Contracting Officer.)

Other Publications

U.S. Department of Commerce, National Bureau of Standards, Handbook H28 Screw-Thread Standards for Federal Services .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

U.S. Department of Commerce, Commercial Standard CS8, "Gage Blanks".

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.)

3. Definitions

Not applicable

4. General Requirements

4.1 This standard contains four tables. Table I provides tabulated design data required for manufacture and inspection and is arranged in ascending size sequence according to thread designation for Unified Standard gages. Table II provides tabulated design data required for manufacture and inspection and is also arranged in ascending size sequence according to thread designation for American National Standard gages. Table III contains thread designations previously listed in the Standard series of Unified Standard thread (with the exception of 1.0000-14NS-3 W which was listed also in the American National Thread Series). They have been redesignated from Standard to special (UNS) threads and are listed herein for reference purposes. Table IV is a listing of Mil-Std Part Numbers in ascending numerical sequence, and is provided as an aid for locating the required design data contained in tables I, II, and III for any given Mil-Std Part Number.

4.1.1 Tables I, II, and III. Tabulation of Design and Identification Data.

4.1.1.1 Mil-Std Part Numbers and the corresponding thread designation for each truncated thread setting plug gage are listed in columns B and C respectively.

4.1.1.2 Column A lists the proper reference to the applicable figure (drawing) for each Mil-Std Part Number.

4.1.1.3 Columns B to D inclusive list the identification data for each Mil-Std Part Number and, when applied to the figure (drawing) referenced in column A, provide information for proper marking of the gages. It is not necessary to mark the "5220" indicated in column B on the gage. For example: Mil-Std Part Number 5220-749-8366 may be marked 7498366 on the gage.

4.1.1.4 Columns E to K inclusive list the design data for each Mil-Std Part Number and, when applied to the figure (drawing) referenced in column A, provide data required for manufacture and inspection.

4.1.1.5 The unit of measurement in columns D, E, F, G, H, and K is inches; column J is ± minutes of a degree.

4.1.1.6 Design data, etc., not specifically covered in this standard shall conform to the latest issue of the documents referenced in paragraph 2 above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

4.1.2 Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence.

4.1.2.1 All Mil-Std Part Numbers contained in this standard are listed in ascending numerical sequence in column A.

4.1.2.2 Column B references the page number in tables I, II, and III where the design and identification data for the applicable Mil-Std Part Number may be found.

5. Procurement

5.1 The general requirements and tabulated design data contained in this standard are applicable for procurement purposes, as are the referenced manufacturing and inspection specifications.

5.2 Ordering Data. Procurement documents should specify the following:

(a) Title, number, and date of this standard.

(b) Number of gages required and Mil-Std Part Number.

(c) Place of delivery for acceptance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

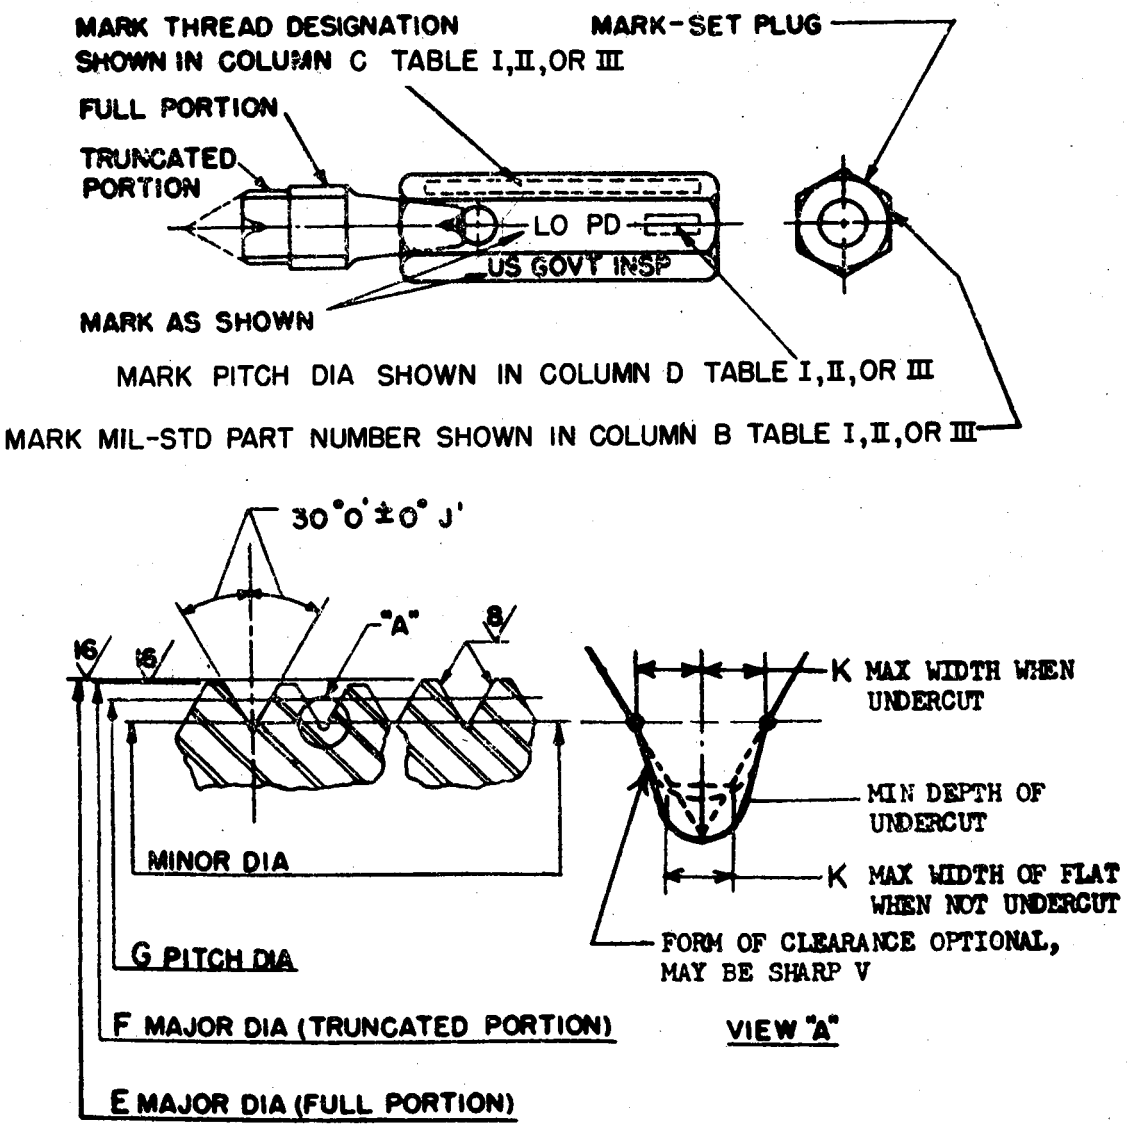


FIGURE 1. *Truncated thread setting plug gage (taper lock type).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

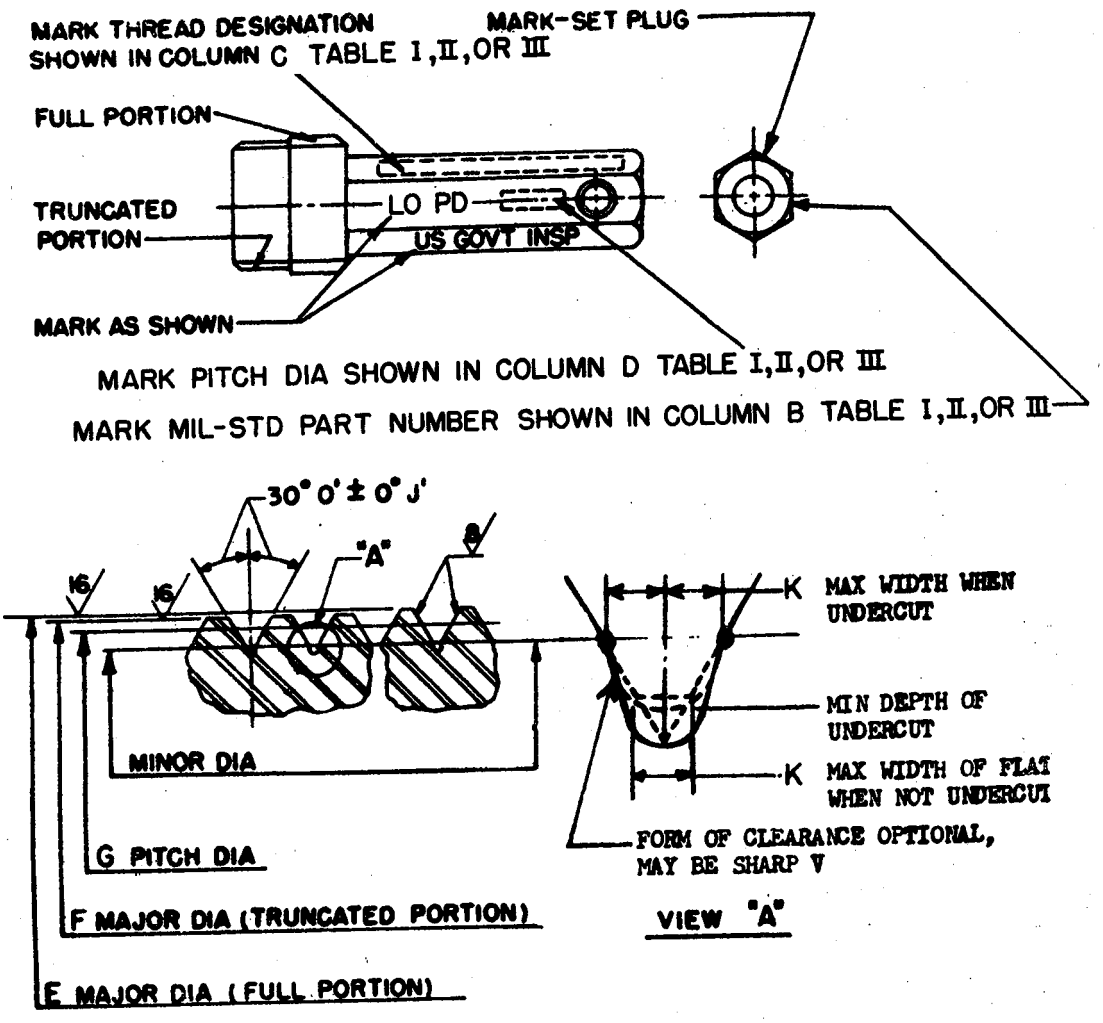


FIGURE 2. *Truncated thread setting plug gage (trilock type).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8366	(0) .060-80UNF-2A W	.0496	.0584 +.0003	.0550 -.0003	.0496 +.0001	.0001	20	.0016
1	5220-749-8367	(0) .060-80UNF-3A-3 W	.0506	.0594 +.0003	.0560 -.0003	.0506 +.0001	.0001	20	.0016
1	5220-749-8368	(1) .073-64UNC-2A W	.0603	.0717 +.0003	.0671 -.0003	.0603 +.0001	.0001	20	.0020
1	5220-749-8369	(1) .073-64UNC-3A W	.0614	.0728 +.0003	.0682 -.0003	.0614 +.0001	.0001	20	.0020
1	5220-749-8371	(1) .073-72UNF-2A W	.0615	.0715 +.0003	.0675 -.0003	.0615 +.0001	.0001	20	.0017
1	5220-749-8372	(1) .073-72UNF-3A W	.0626	.0726 +.0003	.0686 -.0003	.0626 +.0001	.0001	20	.0017
1	5220-749-8374	(2) .086-56UNC-2A W	.0717	.0850 +.0003	.0794 -.0003	.0717 +.0001	.0001	20	.0022
1	5220-749-8375	(2) .086-56UNC-3A W	.0728	.0860 +.0003	.0805 -.0003	.0728 +.0001	.0001	20	.0022
1	5220-749-8377	(2) .086-64UNF-2A W	.0733	.0847 +.0003	.0801 -.0003	.0733 +.0001	.0001	20	.0020
1	5220-749-8378	(2) .086-64UNF-3A W	.0744	.0858 +.0003	.0812 -.0003	.0744 +.0001	.0001	20	.0020
1	5220-749-8380	(3) .099-48UNC-2A W	.0825	.0981 +.0003	.0915 -.0003	.0825 +.0001	.0001	18	.0026
1	5220-749-8381	(3) .099-48UNC-3A W	.0838	.0990 +.0003	.0928 -.0003	.0838 +.0001	.0001	18	.0026
1	5220-749-8383	(3) .099-56UNF-2A W	.0845	.0978 +.0003	.0922 -.0003	.0845 +.0001	.0001	20	.0022
1	5220-749-8384	(3) .099-56UNF-3A W	.0858	.0990 +.0003	.0935 -.0003	.0858 +.0001	.0001	20	.0022
1	5220-749-8386	(4) .112-40UNC-2A W	.0925	.1112 +.0003	.1033 -.0003	.0925 +.0001	.0001	15	.0031

ORDBA Form 2014-3, OCT 62 Replaces 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8387	(4) .112-40UNC-3A W	.0939	.1120 +.0003	.1047 -.0003	.0939 +.0001	.0001	15	.0031
1	5220-749-8389	(4) .112-48UNF-2A W	.0954	.1110 +.0003	.1044 -.0003	.0954 +.0001	.0001	18	.0026
1	5220-749-8390	(4) .112-48UNF-3A W	.0967	.1120 +.0003	.1057 -.0003	.0967 +.0001	.0001	18	.0026
1	5220-749-8392	(5) .125-40UNC-2A W	.1054	.1242 +.0003	.1162 -.0003	.1054 +.0001	.0001	15	.0031
1	5220-749-8393	(5) .125-40UNC-3A W	.1069	.1250 +.0003	.1177 -.0003	.1069 +.0001	.0001	15	.0031
1	5220-749-8395	(5) .125-44UNF-2A W	.1070	.1240 +.0003	.1168 -.0003	.1070 +.0001	.0001	15	.0028
1	5220-749-8396	(5) .125-44UNF-3A W	.1083	.1250 +.0003	.1181 -.0003	.1083 +.0001	.0001	15	.0028
1	5220-749-8398	(6) .138-32UNC-2A W	.1141	.1372 +.0003	.1276 -.0003	.1141 +.0001	.0001	12	.0039
1	5220-749-8399	(6) .138-32UNC-3A W	.1156	.1380 +.0003	.1291 -.0003	.1156 +.0001	.0001	12	.0039
1	5220-749-8401	(6) .138-40UNF-2A W	.1184	.1372 +.0003	.1292 -.0003	.1184 +.0001	.0001	15	.0031
1	5220-749-8402	(6) .138-40UNF-3A W	.1198	.1380 +.0003	.1306 -.0003	.1198 +.0001	.0001	15	.0031
1	5220-749-8404	(8) .164-32UNC-2A W	.1399	.1631 +.0003	.1534 -.0003	.1399 +.0001	.0001	12	.0039
1	5220-749-8405	(8) .164-32UNC-3A W	.1415	.1640 +.0003	.1550 -.0003	.1415 +.0001	.0001	12	.0039
1	5220-749-8407	(8) .164-36UNF-2A W	.1424	.1632 +.0003	.1544 -.0003	.1424 +.0001	.0001	12	.0035
1	5220-749-8408	(8) .164-36UNF-3A W	.1439	.1640 +.0003	.1559 -.0003	.1439 +.0001	.0001	12	.0035

ORDBA Form 20-143[illegible], (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		LO PITCH DIA	TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION		MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8410	(10) .190-24UNC-2A W	.1586	.1890 +.0005	.1766 -.0005	.1586 +.0001	.00015	8	.0052
1	5220-749-8411	(10) .190-24UNC-3A W	.1604	.1900 +.0005	.1784 -.0005	.1604 +.0001	.00015	8	.0052
1	5220-749-8413	(10) .190-32UNF-2A W	.1658	.1891 +.0003	.1793 -.0003	.1658 +.0001	.0001	12	.0039
1	5220-749-8414	(10) .190-32UNF-3A W	.1674	.1900 +.0003	.1809 -.0003	.1674 +.0001	.0001	12	.0039
1	5220-749-8416	(12) .216-24UNC-2A W	.1845	.2150 +.0005	.2025 -.0005	.1845 +.0001	.00015	8	.0052
1	5220-749-8417	(12) .216-24UNC-3A W	.1863	.2160 +.0005	.2043 -.0005	.1863 +.0001	.00015	8	.0052
1	5220-749-8419	(12) .216-28UNF-2A W	.1886	.2150 +.0005	.2041 -.0005	.1886 +.0001	.00015	8	.0045
1	5220-749-8420	(12) .216-28UNF-3A W	.1904	.2160 +.0005	.2059 -.0005	.1904 +.0001	.00015	8	.0045
1	5220-751-6804	(12) .216-32UNEF-2A W	.1917	.2151 +.0003	.2052 -.0003	.1917 +.0001	.0001	12	.0039
1	5220-751-6805	(12) .216-32UNEF-3A W	.1933	.2160 +.0003	.2068 -.0003	.1933 +.0001	.0001	12	.0039
1	5220-749-8422	.2500-20UNC-2A W	.2127	.2489 +.0005	.2344 -.0005	.2127 +.0001	.00015	8	.0062
1	5220-749-8423	.2500-20UNC-3A W	.2147	.2500 +.0005	.2364 -.0005	.2147 +.0001	.00015	8	.0062
1	5220-749-8425	.2500-28UNF-2A W	.2225	.2490 +.0005	.2380 -.0005	.2225 +.0001	.00015	8	.0045
1	5220-749-8426	.2500-28UNF-3A W	.2243	.2500 +.0005	.2398 -.0005	.2243 +.0001	.00015	8	.0045
1	5220-749-8428	.2500-32UNEF-2A W	.2255	.2489 +.0003	.2390 -.0003	.2255 +.0001	.0001	12	.0039

ORDBA F... 4C-14-8... 07 R- 15 M... 0...

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8429	.2500-32UNEF-3A W	.2273	.2500 +.0003	.2408 -.0003	.2273 +.0001	.0001	12	.0039
1	5220-749-8431	.3125-18UNC-2A W	.2712	.3113 +.0005	.2953 -.0005	.2712 +.0001	.00015	8	.0069
1	5220-749-8432	.3125-18UNC-3A-3 W	.2734	.3125 +.0005	.2975 -.0005	.2734 +.0001	.00015	8	.0069
1	7519207	.3125-20UN-2A W	.2748	.3113 +.0005	.2965 -.0005	.2748 +.0001	.00015	8	.0062
1	7519208	.3125-20UN-3A W	.2770	.3125 +.0005	.2987 -.0005	.2770 +.0001	.00015	8	.0062
1	5220-749-8433	.3125-24UNF-2A W	.2806	.3114 +.0005	.2986 -.0005	.2806 +.0001	.00015	8	.0052
1	5220-749-8434	.3125-24UNF-3A W	.2827	.3125 +.0005	.3007 -.0005	.2827 +.0001	.00015	8	.0052
1	7519209	.3125-28UN-2A W	.2849	.3115 +.0005	.3004 -.0005	.2849 +.0001	.00015	8	.0045
1	7519210	.3125-28UN-3A W	.2867	.3125 +.0005	.3022 -.0005	.2867 +.0001	.00015	8	.0045
1	5220-749-8436	.3125-32UNEF-2A W	.2880	.3114 +.0003	.3015 -.0003	.2880 +.0001	.0001	12	.0039
1	5220-749-8437	.3125-32UNEF-3A W	.2898	.3125 +.0003	.3033 -.0003	.2898 +.0001	.0001	12	.0039
1	5220-749-8439	.3750-16UNC-2A W	.3287	.3737 +.0006	.3558 -.0006	.3287 +.0001	.00015	8	.0078
1	5220-749-8440	.3750-16UNC-3A W	.3311	.3750 +.0006	.3582 -.0006	.3311 +.0001	.00015	8	.0078
1	7519211	.3750-20UN-2A W	.3372	.3738 +.0005	.3589 -.0005	.3372 +.0001	.00015	8	.0062
1	7519212	.3750-20UN-3A W	.3394	.3750 +.0005	.3611 -.0005	.3394 +.0001	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8442	.3750-24UNF-2A W	.3430	.3739 +.0005	.3610 -.0005	.3430 +.0001	.00015	8	.0052
1	5220-749-8443	.3750-24UNF-3A W	.3450	.3750 +.0005	.3630 -.0005	.3450 +.0001	.00015	8	.0052
1	7519213	.3750-28UN-2A W	.3471	.3739 +.0005	.3626 -.0005	.3471 +.0001	.00015	8	.0045
1	7519214	.3750-28UN-3A W	.3491	.3750 +.0005	.3646 -.0005	.3491 +.0001	.00015	8	.0045
1	5220-749-8445	.3750-32UNEF-2A W	.3503	.3737 +.0003	.3638 -.0003	.3503 +.0001	.0001	12	.0039
1	5220-749-8446	.3750-32UNEF-3A W	.3522	.3750 +.0003	.3657 -.0003	.3522 +.0001	.0001	12	.0039
1	5220-749-8448	.4375-14UNC-2A W	.3850	.4361 +.0006	.4159 -.0006	.38500 +.00015	.0002	6	.0089
1	5220-749-8449	.4375-14UNC-3A W	.3876	.4375 +.0006	.4185 -.0006	.38760 +.00015	.0002	6	.0089
1	7519215	.4375-16UN-2A W	.3909	.4361 +.0006	.4180 -.0006	.3909 +.0001	.00015	8	.0078
1	7519216	.4375-16UN-3A W	.3935	.4375 +.0006	.4206 -.0006	.3935 +.0001	.00015	8	.0078
1	5220-749-8451	.4375-20UNF-2A W	.3995	.4362 +.0005	.4212 -.0005	.3995 +.0001	.00015	8	.0062
1	5220-749-8452	.4375-20UNF-3A W	.4019	.4375 +.0005	.4236 -.0005	.4019 +.0001	.00015	8	.0062
1	5220-749-8454	.4375-28UNEF-2A W	.4096	.4364 +.0005	.4251 -.0005	.4096 +.0001	.00015	8	.0045
1	5220-749-8455	.4375-28UNEF-3A W	.4116	.4375 +.0005	.4271 -.0005	.4116 +.0001	.00015	8	.0045
1	7519217	.4375-32UN-2A W	.4128	.4362 +.0003	.4263 -.0003	.4128 +.0001	.0001	12	.0039

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	7519218	.4375-32UN-3A W	.4147	.4375 +.0003	.4282 -.0003	.4147 +.0001	.0001	12	.0039
1	5220-749-8458	.5000-13UNC-2A W	.4435	.4985 +.0006	.4768 -.0006	.44350 +.00015	.0002	6	.0096
1	5220-749-8459	.5000-13UNC-3A-3 W	.4463	.5000 +.0006	.4796 -.0006	.44630 +.00015	.0002	6	.0096
1	7519219	.5000-16UN-2A W	.4533	.4986 +.0006	.4804 -.0006	.4533 +.0001	.00015	8	.0078
1	7519220	.5000-16UN-3A W	.4559	.5000 +.0006	.4830 -.0006	.4559 +.0001	.00015	8	.0078
1	5220-749-8460	.5000-20UNF-2A W	.4619	.4987 +.0005	.4836 -.0005	.4619 +.0001	.00015	8	.0062
1	5220-749-8461	.5000-20UNF-3A W	.4643	.5000 +.0005	.4860 -.0005	.4643 +.0001	.00015	8	.0062
1	5220-749-8463	.5000-28UNEF-2A W	.4720	.4988 +.0005	.4875 -.0005	.4720 +.0001	.00015	8	.0045
1	5220-749-8464	.5000-28UNEF-3A W	.4740	.5000 +.0005	.4895 -.0005	.4740 +.0001	.00015	8	.0045
1	7519221	.5000-32UN-2A W	.4752	.4986 +.0003	.4887 -.0003	.4752 +.0001	.0001	12	.0039
1	7519222	.5000-32UN-3A W	.4771	.5000 +.0003	.4906 -.0003	.4771 +.0001	.0001	12	.0039
1	5220-749-8466	.5625-12UNC-2A W	.5016	.5609 +.0006	.5377 -.0006	.5016 +.0002	.0002	6	.0104
1	5220-749-8467	.5625-12UNC-3A W	.5045	.5625 +.0006	.5406 -.0006	.5045 +.0002	.0002	6	.0104
1	7519223	.5625-16UN-2A W	.5158	.5611 +.0006	.5429 -.0006	.5158 +.0002	.00015	8	.0078
1	7519224	.5625-16UN-3A W	.5184	.5625 +.0006	.5455 -.0006	.5184 +.0002	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		LO PITCH DIA	TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION		MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8469	.5625-18UNF-2A W	.5205	.5611 +.0005	.5446 -.0005	.52050 +.00015	.00015	8	.0069
1	5220-749-8470	.5625-18UNF-3A W	.5230	.5625 +.0005	.5471 -.0005	.52300 +.00015	.00015	8	.0069
1	7519225	.5625-20UN-2A W	.5245	.5612 +.0005	.5462 -.0005	.52450 +.00015	.00015	8	.0062
1	7519226	.5625-20UN-3A W	.5268	.5625 +.0005	.5485 -.0005	.52680 +.00015	.00015	8	.0062
1	5220-749-8472	.5625-24UNEF-2A W	.5303	.5613 +.0005	.5483 -.0005	.53030 +.00015	.00015	8	.0052
1	5220-749-8473	.5625-24UNEF-3A W	.5325	.5625 +.0005	.5505 -.0005	.53250 +.00015	.00015	8	.0052
1	7519227	.5625-28UN-2A W	.5345	.5613 +.0005	.5500 -.0005	.53450 +.00015	.00015	8	.0045
1	7519228	.5625-28UN-3A W	.5365	.5625 +.0005	.5520 -.0005	.53650 +.00015	.00015	8	.0045
1	7519229	.5625-32UN-2A W	.5377	.5611 +.0005	.5512 -.0005	.53770 +.00015	.00015	12	.0039
1	7519230	.5625-32UN-3A W	.5396	.5625 +.0005	.5531 -.0005	.53960 +.00015	.00015	12	.0039
1	5220-749-8475	.6250-11UNC-2A W	.5589	.6234 +.0006	.5983 -.0006	.5589 +.0002	.0002	6	.0114
1	5220-749-8476	.6250-11UNC-3A W	.5619	.6250 +.0006	.6013 -.0006	.5619 +.0002	.0002	6	.0114
1	5220-751-6808	.6250-12UN-2A W	.5639	.6234 +.0006	.6000 -.0006	.5639 +.0002	.0002	6	.0104
1	5220-751-6809	.6250-12UN-3A W	.5668	.6250 +.0006	.6029 -.0006	.5668 +.0002	.0002	6	.0104
1	7519231	.6250-16UN-2A W	.5782	.6236 +.0006	.6053 -.0006	.5782 +.0002	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	7519232	.6250-16UN-3A W	.5808	.6250 +.0006	.6079 -.0006	.5808 +.0002	.00015	8	.0078
1	5220-749-8479	.6250-18UNF-2A W	.5828	.6236 +.0005	.6069 -.0005	.58280 +.00015	.00015	8	.0069
1	5220-749-8480	.6250-18UNF-3A W	.5854	.6250 +.0005	.6095 -.0005	.58540 +.00015	.00015	8	.0069
1	7519233	.6250-20UN-2A W	.5869	.6237 +.0005	.6086 -.0005	.58690 +.00015	.00015	8	.0062
1	7519234	.6250-20UN-3A W	.5893	.6250 +.0005	.6110 -.0005	.58930 +.00015	.00015	8	.0062
1	5220-749-8482	.6250-24UNEF-2A W	.5927	.6238 +.0005	.6107 -.0005	.59270 +.00015	.00015	8	.0052
1	5220-749-8483	.6250-24UNEF-3A W	.5949	.6250 +.0005	.6129 -.0005	.59490 +.00015	.00015	8	.0052
1	7519235	.6250-28UN-2A W	.5969	.6237 +.0005	.6124 -.0005	.59690 +.00015	.00015	8	.0045
1	7519236	.6250-28UN-3A W	.5990	.6250 +.0005	.6145 -.0005	.59900 +.00015	.00015	8	.0045
1	7519237	.6250-32UN-2A W	.6000	.6234 +.0005	.6135 -.0005	.60000 +.00015	.00015	12	.0039
1	7519238	.6250-32UN-3A W	.6020	.6250 +.0005	.6155 -.0005	.60200 +.00015	.00015	12	.0039
1	5220-751-6810	.6875-12UN-2A W	.6264	.6859 +.0006	.6625 -.0006	.6264 +.0002	.0002	6	.0104
1	5220-751-6811	.6875-12UN-3A W	.6293	.6875 +.0006	.6654 -.0006	.6293 +.0002	.0002	6	.0104
1	7519239	.6875-16UN-2A W	.6407	.6861 +.0006	.6678 -.0006	.6407 +.0002	.00015	8	.0078
1	7519240	.6875-16UN-3A W	.6433	.6875 +.0006	.6704 -.0006	.6433 +.0002	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	7519241	.6875-20UN-2A W	.6494	.6862 +.0005	.6711 -.0005	.64940 +.00015	.00015	8	.0062
1	7519242	.6875-20UN-3A W	.6518	.6875 +.0005	.6735 -.0005	.65180 +.00015	.00015	8	.0062
1	5220-749-8486	.6875-24UNEF-2A W	.6552	.6863 +.0005	.6732 -.0005	.65520 +.00015	.00015	8	.0052
1	5220-749-8487	.6875-24UNEF-3A W	.6574	.6875 +.0005	.6754 -.0005	.65740 +.00015	.00015	8	.0052
1	7519243	.6875-28UN-2A W	.6594	.6862 +.0005	.6749 -.0005	.65940 +.00015	.00015	8	.0045
1	7519244	.6875-28UN-3A W	.6615	.6875 +.0005	.6770 -.0005	.66150 +.00015	.00015	8	.0045
1	7519245	.6875-32UN-2A W	.6625	.6859 +.0005	.6760 -.0005	.66250 +.00015	.00015	12	.0039
1	7519246	.6875-32UN-3A W	.6645	.6875 +.0005	.6780 -.0005	.66450 +.00015	.00015	12	.0039
1	5220-749-8489	.7500-10UNC-2A W	.6773	.7482 +.0006	.7206 -.0006	.6773 +.0002	.00025	6	.0125
1	5220-749-8490	.7500-10UNC-3A W	.6806	.7500 +.0006	.7239 -.0006	.6806 +.0002	.00025	6	.0125
1	5220-751-6812	.7500-12UN-2A W	.6887	.7483 +.0006	.7248 -.0006	.6887 +.0002	.0002	6	.0104
1	5220-751-6813	.7500-12UN-3A W	.6918	.7500 +.0006	.7279 -.0006	.6918 +.0002	.0002	6	.0104
1	5220-749-8493	.7500-16UNF-2A W	.7029	.7485 +.0006	.7300 -.0006	.7029 +.0002	.00015	8	.0078
1	5220-749-8494	.7500-16UNF-3A W	.7056	.7500 +.0006	.7327 -.0006	.7056 +.0002	.00015	8	.0078
1	5220-749-8496	.7500-20UNEF-2A W	.7118	.7487 +.0005	.7335 -.0005	.71180+.00015	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8497	.7500-20UNEF-3A W	.7142	.7500 +.0005	.7359 -.0005	.71420 +.00015	.00015	8	.0062
1	7519247	.7500-28UN-2A W	.7218	.7486 +.0005	.7373 -.0005	.72180 +.00015	.00015	8	.0045
1	7519248	.7500-28UN-3A W	.7239	.7500 +.0005	.7384 -.0005	.72390 +.00015	.00015	8	.0045
1	7519249	.7500-32UN-2A W	.7250	.7484 +.0005	.7385 -.0005	.72500 +.00015	.00015	12	.0039
1	7519250	.7500-32UN-3A W	.7270	.7500 +.0005	.7405 -.0005	.72700 +.00015	.00015	12	.0039
1	5220-751-6814	.8125-12UN-2A W	.7512	.8108 +.0006	.7873 -.0006	.7512 +.0002	.0002	6	.0104
1	5220-751-6815	.8125-12UN-3A W	.7543	.8125 +.0006	.7904 -.0006	.7543 +.0002	.0002	6	.0104
1	5220-751-6816	.8125-16UN-2A W	.7655	.8110 +.0006	.7926 -.0006	.7655 +.0002	.00015	8	.0078
1	5220-751-6817	.8125-16UN-3A W	.7683	.8125 +.0006	.7954 -.0006	.7683 +.0002	.00015	8	.0078
1	5220-749-8501	.8125-20UNEF-2A W	.7743	.8112 +.0005	.7960 -.0005	.77430 +.00015	.00015	8	.0062
1	5220-749-8502	.8125-20UNEF-3A W	.7767	.8125 +.0005	.7984 -.0005	.77670 +.00015	.00015	8	.0062
1	7519251	.8125-28UN-2A W	.7843	.8111 +.0005	.7998 -.0005	.78430 +.00015	.00015	8	.0045
1	7519252	.8125-28UN-3A W	.7864	.8125 +.0005	.8019 -.0005	.78640 +.00015	.00015	8	.0045
1	7519253	.8125-32UN-2A W	.7875	.8109 +.0005	.8010 -.0005	.78750 +.00015	.00015	12	.0039
1	7519254	.8125-32UN-3A W	.7895	.8125 +.0005	.8030 -.0005	.78950 +.00015	.00015	12	.0039

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8504	.8750-9UNC-2A W	.7946	.8731 +.0007	.8427 -.0007	.7946 +.0002	.00025	6	.0139
1	5220-749-8505	.8750-9UNC-3A W	.7981	.8750 +.0007	.8462 -.0007	.7981 +.0002	.00025	6	.0139
1	5220-751-6818	.8750-12UN-2A W	.8137	.8733 +.0006	.8498 -.0006	.8137 +.0002	.0002	6	.0104
1	5220-751-6819	.8750-12UN-3A W	.8168	.8750 +.0006	.8529 -.0006	.8168 +.0002	.0002	6	.0104
1	5220-749-8508	.8750-14UNF-2A W	.8216	.8734 +.0006	.8525 -.0006	.8216 +.0002	.0002	6	.0089
1	5220-749-8509	.8750-14UNF-3A W	.8245	.8750 +.0006	.8554 -.0006	.8245 +.0002	.0002	6	.0089
1	5220-751-6820	.8750-16UN-2A W	.8280	.8735 +.0006	.8551 -.0006	.8280 +.0002	.00015	8	.0078
1	5220-749-8511	.8750-16UN-3A-3 W	.8308	.8750 +.0006	.8579 -.0006	.8308 +.0002	.00015	8	.0078
1	5220-749-8512	.8750-20UNEF-2A W	.8368	.8737 +.0005	.8585 -.0005	.83680 +.00015	.00015	8	.0062
1	5220-749-8513	.8750-20UNEF-3A-3 W	.8392	.8750 +.0005	.8609 -.0005	.83920 +.00015	.00015	8	.0062
1	7519255	.8750-28UN-2A W	.8468	.8736 +.0005	.8623 -.0005	.84680 +.00015	.00015	8	.0045
1	7519256	.8750-28UN-3A W	.8489	.8750 +.0005	.8644 -.0005	.84890 +.00015	.00015	8	.0045
1	7519257	.8750-32UN-2A W	.8500	.8734 +.0005	.8635 -.0005	.85000 +.00015	.00015	12	.0039
1	7519258	.8750-32UN-3A W	.8520	.8750 +.0005	.8655 -.0005	.85200 +.00015	.00015	12	.0039
1	5220-751-6821	.9375-12UN-2A W	.8760	.9358 +.0006	.9121 -.0006	.8760 +.0002	.0002	6	.0104

ORDBA Form 20-1413, (OT), Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-751-6822	.9375-12UN-3A W	.8793	.9375 +.0006	.9154 -.0006	.8793 +.0002	.0002	6	.0104
1	5220-751-6823	.9375-16UN-2A W	.8904	.9360 +.0006	.9175 -.0006	.8904 +.0002	.00015	8	.0078
1	5220-751-6824	.9375-16UN-3A W	.8932	.9375 +.0006	.9203 -.0006	.8932 +.0002	.00015	8	.0078
1	5220-749-8516	.9375-20UNEF-2A W	.8991	.9361 +.0005	.9208 -.0005	.89910 +.00015	.00015	8	.0062
1	5220-749-8517	.9375-20UNEF-3A W	.9016	.9375 +.0005	.9233 -.0005	.90160 +.00015	.00015	8	.0062
1	7519259	.9375-28UN-2A W	.9091	.9359 +.0005	.9246 -.0005	.90910 +.00015	.00015	8	.0045
1	7519260	.9375-28UN-3A W	.9113	.9375 +.0005	.9268 -.0005	.91130 +.00015	.00015	8	.0045
1	7519261	.9375-32UN-2A W	.9123	.9357 +.0005	.9258 -.0005	.91230 +.00015	.00015	12	.0039
1	7519262	.9375-32UN-3A W	.9144	.9375 +.0005	.9279 -.0005	.91440 +.00015	.00015	12	.0039
1	5220-749-8519	1.0000-8UNC-2A W	.9100	.9980 +.0007	.9641 -.0007	.9100 +.0002	.00025	5	.0156
1	5220-749-8520	1.0000-8UNC-3A W	.9137	1.0000 +.0007	.9678 -.0007	.9137 +.0002	.00025	5	.0156
1	5220-749-8522	1.0000-12UNF-2A W	.9382	.9982 +.0006	.9743 -.0006	.9382 +.0002	.0002	6	.0104
1	5220-749-8523	1.0000-12UNF-3A W	.9415	1.0000 +.0006	.9776 -.0006	.9415 +.0002	.0002	6	.0104
1	5220-751-6825	1.0000-16UN-2A W	.9529	.9985 +.0006	.9800 -.0006	.9529 +.0002	.00015	8	.0078
1	5220-749-8528	1.0000-16UN-3A-3 W	.9557	1.0000 +.0006	.9828 -.0006	.9557 +.0002	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8529	1.0000-20UNEF-2A W	.9616	.9986 +.0005	.9833 -.0005	.96160 +.00015	.00015	8	.0062
1	5220-749-8530	1.0000-20UNEF-3A-3 W	.9641	1.0000 +.0005	.9858 -.0005	.96410 +.00015	.00015	8	.0062
1	7519263	1.0000-28UN-2A W	.9716	.9984 +.0005	.9871 -.0005	.97160 +.00015	.00015	8	.0045
1	7519264	1.0000-28UN-3A W	.9738	1.0000 +.0005	.9893 -.0005	.97380 +.00015	.00015	8	.0045
1	7519265	1.0000-32UN-2A W	.9748	.9982 +.0005	.9883 -.0005	.97480 +.00015	.00015	12	.0039
1	7519266	1.0000-32UN-3A W	.9769	1.0000 +.0005	.9904 -.0005	.97690 +.00015	.00015	12	.0039
1	7519267	1.0625-8UN-2A W	.9725	1.0605 +.0007	1.0266 -.0007	.9725 +.0002	.00025	5	.0156
1	7519268	1.0625-8UN-3A W	.9762	1.0625 +.0007	1.0303 -.0007	.9762 +.0002	.00025	5	.0156
1	5220-749-8531	1.0625-12UN-2A W	1.0010	1.0608 +.0006	1.0371 -.0006	1.0010 +.0002	.0002	6	.0104
1	5220-749-8532	1.0625-12UN-3A W	1.0042	1.0625 +.0006	1.0403 -.0006	1.0042 +.0002	.0002	6	.0104
1	5220-751-6826	1.0625-16UN-2A W	1.0154	1.0610 +.0006	1.0425 -.0006	1.0154 +.0002	.00015	8	.0078
1	5220-749-8534	1.0625-16UN-3A-3 W	1.0182	1.0625 +.0006	1.0453 -.0006	1.0182 +.0002	.00015	8	.0078
1	5220-749-8535	1.0625-18UNEF-2A W	1.0203	1.0611 +.0005	1.0444 -.0005	1.02030 +.00015	.00015	8	.0069
1	5220-749-8536	1.0625-18UNEF-3A-3 W	1.0228	1.0625 +.0005	1.0469 -.0005	1.02280 +.00015	.00015	8	.0069
1	7519269	1.0625-20UN-2A W	1.0241	1.0611 +.0005	1.0458 -.0005	1.02410 +.00015	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	7519270	1.0625-20UN-3A W	1.0266	1.0625 +.0005	1.0483 -.0005	1.02660 +.00015	.00015	8	.0062
1	7519271	1.0625-28UN-2A W	1.0341	1.0609 +.0005	1.0496 -.0005	1.03410 +.00015	.00015	8	.0045
1	7519272	1.0625-28UN-3A W	1.0363	1.0625 +.0005	1.0518 -.0005	1.03630 +.00015	.00015	8	.0045
1	5220-749-8537	1.1250-7UNC-2A W	1.0228	1.1228 +.0007	1.0847 -.0007	1.0228 +.0002	.0003	5	.0179
1	5220-749-8538	1.1250-7UNC-3A W	1.0268	1.1250 +.0007	1.0887 -.0007	1.0268 +.0002	.0003	5	.0179
1	5220-749-8540	1.1250-8UN-2A W	1.0348	1.1229 +.0007	1.0889 -.0007	1.0348 +.0002	.00025	5	.0156
1	5220-749-8541	1.1250-8UN-3A W	1.0386	1.1250 +.0007	1.0927 -.0007	1.0386 +.0002	.00025	5	.0156
1	5220-749-8543	1.1250-12UNF-2A W	1.0631	1.1232 +.0006	1.0992 -.0006	1.0631 +.0002	.0002	6	.0104
1	5220-749-8544	1.1250-12UNF-3A W	1.0664	1.1250 +.0006	1.1025 -.0006	1.0664 +.0002	.0002	6	.0104
1	5220-751-6827	1.1250-16UN-2A W	1.0779	1.1235 +.0006	1.1050 -.0006	1.0779 +.0002	.00015	8	.0078
1	5220-751-6828	1.1250-16UN-3A W	1.0807	1.1250 +.0006	1.1078 -.0006	1.0807 +.0002	.00015	8	.0078
1	5220-749-8547	1.1250-18UNEF-2A W	1.0828	1.1236 +.0005	1.1069 -.0005	1.08280 +.00015	.00015	8	.0069
1	5220-749-8548	1.1250-18UNEF-3A-3 W	1.0853	1.1250 +.0005	1.1094 -.0005	1.08530 +.00015	.00015	8	.0069
1	7519273	1.1250-20UN-2A W	1.0866	1.1236 +.0005	1.1083 -.0005	1.08660 +.00015	.00015	8	.0062
1	7519274	1.1250-20UN-3A W	1.0891	1.1250 +.0005	1.1108 -.0005	1.08910 +.00015	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	7519275	1.1250-28UN-2A W	1.0966	1.1234 +.0005	1.1121 -.0005	1.09660 +.00015	.00015	8	.0045
1	7519276	1.1250-28UN-3A W	1.0988	1.1250 +.0005	1.1143 -.0005	1.09880 +.00015	.00015	8	.0045
1	7519277	1.1875-8UN-2A W	1.0972	1.1854 +.0007	1.1513 -.0007	1.0972 +.0002	.00025	5	.0156
1	7519278	1.1875-8UN-3A W	1.1011	1.1875 +.0007	1.1552 -.0007	1.1011 +.0002	.00025	5	.0156
1	5220-749-8549	1.1875-12UN-2A W	1.1259	1.1858 +.0006	1.1620 -.0006	1.1259 +.0002	.0002	6	.0104
1	5220-749-8550	1.1875-12UN-3A W	1.1291	1.1875 +.0006	1.1652 -.0006	1.1291 +.0002	.0002	6	.0104
1	5220-751-6829	1.1875-16UN-2A W	1.1403	1.1860 +.0006	1.1674 -.0006	1.1403 +.0002	.00015	8	.0078
1	5220-749-8552	1.1875-16UN-3A-3 W	1.1431	1.1875 +.0006	1.1702 -.0006	1.1431 +.0002	.00015	8	.0078
1	5220-749-8553	1.1875-18UNEF-2A W	1.1450	1.1860 +.0005	1.1691 -.0005	1.14500 +.00015	.00015	8	.0069
1	5220-749-8554	1.1875-18UNEF-3A-3 W	1.1478	1.1875 +.0005	1.1719 -.0005	1.14780 +.00015	.00015	8	.0069
1	7519279	1.1875-20UN-2A W	1.1489	1.1861 +.0005	1.1706 -.0005	1.14890 +.00015	.00015	8	.0062
1	7519280	1.1875-20UN-3A W	1.1515	1.1875 +.0005	1.1732 -.0005	1.15150 +.00015	.00015	8	.0062
1	7519281	1.1875-28UN-2A W	1.1590	1.1858 +.0005	1.1745 -.0005	1.15900 +.00015	.00015	8	.0045
1	7519282	1.1875-28UN-3A W	1.1612	1.1875 +.0005	1.1767 -.0005	1.16120 +.00015	.00015	8	.0045
1	5220-749-8555	1.2500-7UNC-2A W	1.1476	1.2478 +.0007	1.2095 -.0007	1.1476 +.0002	.0003	5	.0179

GRDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8556	1.2500-7UNC-3A W	1.1517	1.2500 +.0007	1.2136 -.0007	1.1517 +.0002	.0003	5	.0179
1	5220-749-8558	1.2500-8UN-2A W	1.1579	1.2479 +.0007	1.2138 -.0007	1.1597 +.0002	.00025	5	.0156
1	5220-749-8559	1.2500-8UN-3A W	1.1635	1.2500 +.0007	1.2176 -.0007	1.1635 +.0002	.00025	5	.0156
1	5220-749-8561	1.2500-12UNF-2A W	1.1879	1.2482 +.0006	1.2240 -.0006	1.1879 +.0002	.0002	6	.0104
1	5220-749-8562	1.2500-12UNF-3A W	1.1913	1.2500 +.0006	1.2274 -.0006	1.1913 +.0002	.0002	6	.0104
1	5220-751-6830	1.2500-16UN-2A W	1.2028	1.2485 +.0006	1.2299 -.0006	1.2028 +.0002	.00015	8	.0078
1	5220-749-8564	1.2500-16UN-3A-3 W	1.2056	1.2500 +.0006	1.2327 -.0006	1.2056 +.0002	.00015	8	.0078
1	5220-749-8565	1.2500-18UNEF-2A W	1.2075	1.2485 +.0005	1.2316 -.0005	1.20750 +.00015	.00015	8	.0069
1	5220-749-8566	1.2500-18UNEF-3A W	1.2103	1.2500 +.0005	1.2344 -.0005	1.21030 +.00015	.00015	8	.0069
1	7519283	1.2500-20UN-2A W	1.2114	1.2486 +.0005	1.2331 -.0005	1.21140 +.00015	.00015	8	.0062
1	7519284	1.2500-20UN-3A W	1.2140	1.2500 +.0005	1.2357 -.0005	1.21400 +.00015	.00015	8	.0062
1	7519285	1.2500-28UN-2A W	1.2215	1.2483 +.0005	1.2370 -.0005	1.22150 +.00015	.00015	8	.0045
1	7519286	1.2500-28UN-3A W	1.2237	1.2500 +.0005	1.2392 -.0005	1.22370 +.00015	.00015	8	.0045
1	7519287	1.3125-8UN-2A W	1.2221	1.3104 +.0007	1.2762 -.0007	1.2221 +.0002	.00025	5	.0156
1	7519288	1.3125-8UN-3A W	1.2260	1.3125 +.0007	1.2801 -.0007	1.2260 +.0002	.00025	5	.0156

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8568	1.3125-12UN-2A W	1.2509	1.3108 +.0006	1.2870 -.0006	1.2509 +.0002	.0002	6	.0104
1	5220-749-8569	1.3125-12UN-3A W	1.2541	1.3125 +.0006	1.2902 -.0006	1.2541 +.0002	.0002	6	.0104
1	5220-751-6831	1.3125-16UN-2A W	1.2653	1.3110 +.0006	1.2924 -.0006	1.2653 +.0002	.00015	8	.0078
1	5220-751-6832	1.3125-16UN-3A W	1.2681	1.3125 +.0006	1.2952 -.0006	1.2681 +.0002	.00015	8	.0078
1	5220-749-8572	1.3125-18UNEF-2A W	1.2700	1.3110 +.0005	1.2941 -.0005	1.27000 +.00015	.00015	8	.0069
1	5220-749-8573	1.3125-18UNEF-3A W	1.2728	1.3125 +.0005	1.2969 -.0005	1.27280 +.00015	.00015	8	.0069
1	7519289	1.3125-20UN-2A W	1.2739	1.3111 +.0005	1.2956 -.0005	1.27390 +.00015	.00015	8	.0062
1	7519290	1.3125-20UN-3A W	1.2765	1.3125 +.0005	1.2982 -.0005	1.27650 +.00015	.00015	8	.0062
1	7519291	1.3125-28UN-2A W	1.2840	1.3108 +.0005	1.2995 -.0005	1.28400 +.00015	.00015	8	.0045
1	7519292	1.3125-28UN-3A W	1.2862	1.3125 +.0005	1.3017 -.0005	1.28620 +.00015	.00015	8	.0045
1	5220-749-8575	1.3750-6UNC-2A W	1.2563	1.3726 +.0008	1.3285 -.0008	1.2563 +.0002	.0003	5	.0208
1	5220-749-8576	1.3750-6UNC-3A W	1.2607	1.3750 +.0008	1.3329 -.0008	1.2607 +.0002	.0003	5	.0208
1	5220-749-8578	1.3750-8UN-2A W	1.2844	1.3728 +.0007	1.3385 -.0007	1.2844 +.0002	.00025	5	.0156
1	5220-749-8579	1.3750-8UN-3A W	1.2884	1.3750 +.0007	1.3425 -.0007	1.2884 +.0002	.00025	5	.0158
1	5220-749-8581	1.3750-12UNF-2A W	1.3127	1.3731 +.0006	1.3488 -.0006	1.3127 +.0002	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8582	1.3750-12UNF-3A W	1.3162	1.3750 +.0006	1.3523 -.0006	1.3162 +.0002	.0002	6	.0104
1	5220-751-6833	1.3750-16UN-2A W	1.3278	1.3735 +.0006	1.3549 -.0006	1.3278 +.0002	.00015	8	.0078
1	5220-751-6834	1.3750-16UN-3A W	1.3306	1.3750 +.0006	1.3577 -.0006	1.3306 +.0002	.00015	8	.0078
1	5220-749-8585	1.3750-18UNEF-2A W	1.3325	1.3735 +.0005	1.3566 -.0005	1.33250 +.00015	.00015	8	.0069
1	5220-749-8586	1.3750-18UNEF-3A W	1.3353	1.3750 +.0005	1.3594 -.0005	1.33530 +.00015	.00015	8	.0069
1	7519293	1.3750-20UN-2A W	1.3364	1.3736 +.0005	1.3581 -.0005	1.33640 +.00015	.00015	8	.0062
1	7519294	1.3750-20UN-3A W	1.3390	1.3750 +.0005	1.3607 -.0005	1.33900 +.00015	.00015	8	.0062
1	7519295	1.3750-28UN-2A W	1.3465	1.3733 +.0005	1.3620 -.0005	1.34650 +.00015	.00015	8	.0045
1	7519296	1.3750-28UN-3A W	1.3487	1.3750 +.0005	1.3642 -.0005	1.34870 +.00015	.00015	8	.0045
1	7519297	1.4375-6UN-2A W	1.3188	1.4351 +.0008	1.3910 -.0008	1.3188 +.0002	.0003	5	.0208
1	7519298	1.4375-6UN-3A W	1.3232	1.4375 +.0008	1.3954 -.0008	1.3232 +.0002	.0003	5	.0208
1	7519299	1.4375-8UN-2A W	1.3469	1.4353 +.0007	1.4010 -.0007	1.3469 +.0002	.00025	5	.0156
1	7519300	1.4375-8UN-3A W	1.3509	1.4375 +.0007	1.4050 -.0007	1.3509 +.0002	.00025	5	.0156
1	5220-749-8588	1.4375-12UN-2A W	1.3757	1.4357 +.0006	1.4118 -.0006	1.3757 +.0002	.0002	6	.0104
1	5220-749-8589	1.4375-12UN-3A W	1.3790	1.4375 +.0006	1.4151 -.0006	1.3790 +.0002	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-751-6835	1.4375-16UN-2A W	1.3901	1.4359 +.0006	1.4172 -.0006	1.3901 +.0002	.00015	8	.0078
1	5220-751-6836	1.4375-16UN-3A W	1.3930	1.4375 +.0006	1.4201 -.0006	1.3930 +.0002	.00015	8	.0078
1	5220-749-8592	1.4375-18UNEF-2A W	1.3949	1.4360 +.0005	1.4190 -.0005	1.39490 +.00015	.00015	8	.0069
1	5220-749-8593	1.4375-18UNEF-3A W	1.3977	1.4375 +.0005	1.4218 -.0005	1.39770 +.00015	.00015	8	.0069
1	7519301	1.4375-20UN-2A W	1.3988	1.4361 +.0005	1.4205 -.0005	1.39880 +.00015	.00015	8	.0062
1	7519302	1.4375-20UN-3A W	1.4014	1.4375 +.0005	1.4231 -.0005	1.40140 +.00015	.00015	8	.0062
1	7519303	1.4375-28UN-2A W	1.4088	1.4356 +.0005	1.4243 -.0005	1.40880 +.00015	.00015	8	.0045
1	7519304	1.4375-28UN-3A W	1.4112	1.4375 +.0005	1.4267 -.0005	1.41120 +.00015	.00015	8	.0045
1	5220-749-8595	1.5000-6UNC-2A W	1.3812	1.4976 +.0008	1.4534 -.0008	1.3812 +.0002	.0003	5	.0208
1	5220-749-8596	1.5000-6UNC-3A W	1.3856	1.5000 +.0008	1.4578 -.0008	1.3856 +.0002	.0003	5	.0208
1	5220-749-8598	1.5000-8UN-2A W	1.4093	1.4978 +.0007	1.4634 -.0007	1.4093 +.0002	.00025	5	.0156
1	5220-749-8599	1.5000-8UN-3A W	1.4133	1.5000 +.0007	1.4674 -.0007	1.4133 +.0002	.00025	5	.0156
1	5220-749-8601	1.5000-12UNF-2A W	1.4376	1.4981 +.0006	1.4737 -.0006	1.4376 +.0002	.0002	6	.0104
1	5220-749-8602	1.5000-12UNF-3A W	1.4411	1.5000 +.0006	1.4772 -.0006	1.4411 +.0002	.0002	6	.0104
1	5220-751-6837	1.5000-16UN-2A W	1.4526	1.4984 +.0006	1.4797 -.0006	1.4526 +.0002	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-751-6838	1.5000-16UN-3A W	1.4555	1.5000 +.0006	1.4826 -.0006	1.4555 +.0002	.00015	8	.0078
1	5220-749-8605	1.5000-18UNEF-2A W	1.4574	1.4985 +.0005	1.4815 -.0005	1.45740 +.00015	.00015	8	.0069
1	5220-749-8606	1.5000-18UNEF-3A W	1.4602	1.5000 +.0005	1.4843 -.0005	1.46020 +.00015	.00015	8	.0069
1	7519305	1.5000-20UN-2A W	1.4613	1.4986 +.0005	1.4830 -.0005	1.46130 +.00015	.00015	8	.0062
1	7519306	1.5000-20UN-3A W	1.4639	1.5000 +.0005	1.4856 -.0005	1.46390 +.00015	.00015	8	.0062
1	7519307	1.5000-28UN-2A W	1.4713	1.4981 +.0005	1.4868 -.0005	1.47130 +.00015	.00015	8	.0045
1	7519308	1.5000-28UN-3A W	1.4737	1.5000 +.0005	1.4892 -.0005	1.47370 +.00015	.00015	8	.0045
2	519309	1.5625-6UN-2A W	1.4436	1.5601 +.0008	1.5158 -.0008	1.44360 +.00025	.0003	5	.0208
2	7519310	1.5625-6UN-3A W	1.4481	1.5625 +.0008	1.5203 -.0008	1.44810 +.00025	.0003	5	.0208
2	7519311	1.5625-8UN-2A W	1.4717	1.5603 +.0007	1.5258 -.0007	1.47170 +.00025	.00025	5	.0156
2	7519312	1.5625-8UN-3A W	1.4758	1.5625 +.0007	1.5299 -.0007	1.47580 +.00025	.00025	5	.0156
2	7519313	1.5625-12UN-2A W	1.5007	1.5607 +.0006	1.5368 -.0006	1.50070 +.00025	.0002	6	.0104
2	7519314	1.5625-12UN-3A W	1.5040	1.5625 +.0006	1.5401 -.0006	1.50400 +.00025	.0002	6	.0104
2	5220-751-6839	1.5625-16UN-2A W	1.5151	1.5609 +.0006	1.5422 -.0006	1.51510 +.00025	.00015	8	.0078
2	5220-751-6840	1.5625-16UN-3A W	1.5180	1.5625 +.0006	1.5451 -.0006	1.51800 +.00015	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8609	1.5625-18UNEF-2A W	1.5199	1.5610 +.0005	1.5440 -.0005	1.5199 +.0002	.00015	8	.0069
2	5220-749-8610	1.5625-18UNEF-3A W	1.5227	1.5625 +.0005	1.5468 -.0005	1.5227 +.0002	.00015	8	.0069
2	7519315	1.5625-20UN-2A W	1.5238	1.5611 +.0005	1.5455 -.0005	1.5238 +.0002	.00015	8	.0062
2	7519316	1.5625-20UN-3A W	1.5264	1.5625 +.0005	1.5481 -.0005	1.5264 +.0002	.00015	8	.0062
2	7519317	1.6250-6UN-2A W	1.5060	1.6225 +.0008	1.5782 -.0008	1.50600 +.00025	.0003	5	.0208
2	7519318	1.6250-6UN-3A W	1.5105	1.6250 +.0008	1.5827 -.0008	1.51050 +.00025	.0003	5	.0208
2	5220-749-8612	1.6250-8UN-2A W	1.5342	1.6228 +.0007	1.5883 -.0007	1.53420 +.00025	.00025	5	.0156
2	5220-749-8613	1.6250-8UN-3A W	1.5382	1.6250 +.0007	1.5923 -.0007	1.53820 +.00025	.00025	5	.0156
2	5220-749-8615	1.6250-12UN-2A W	1.5632	1.6232 +.0006	1.5993 -.0006	1.56320 +.00025	.0002	6	.0104
2	5220-749-8616	1.6250-12UN-3A W	1.5665	1.6250 +.0006	1.6026 -.0006	1.56650 +.00025	.0002	6	.0104
2	5220-751-6841	1.6250-16UN-2A W	1.5776	1.6234 +.0006	1.6047 -.0006	1.57760 +.00025	.00015	8	.0078
2	5220-751-6842	1.6250-16UN-3A W	1.5805	1.6250 +.0006	1.6076 -.0006	1.58050 +.00025	.00015	8	.0078
2	5220-749-8619	1.6250-18UNEF-2A W	1.5824	1.6235 +.0005	1.6065 -.0005	1.5824 +.0002	.00015	8	.0069
2	5220-749-8620	1.6250-18UNEF-3A W	1.5852	1.6250 +.0005	1.6093 -.0005	1.5852 +.0002	.00015	8	.0069
2	7519319	1.6250-20UN-2A W	1.5863	1.6236 +.0005	1.6080 -.0005	1.5863 +.0002	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON CAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519320	1.6250-20UN-3A W	1.5889	1.6250 +.0005	1.6106 -.0005	1.5889 +.0002	.00015	8	.0062
2	7519321	1.6875-6UN-2A W	1.5684	1.6850 +.0008	1.6406 -.0008	1.56840 +.00025	.0003	5	.0208
2	7519322	1.6875-6UN-3A W	1.5730	1.6875 +.0008	1.6452 -.0008	1.57300 +.00025	.0003	5	.0208
2	7519323	1.6875-8UN-2A W	1.5966	1.6853 +.0007	1.6507 -.0007	1.59660 +.00025	.00025	5	.0156
2	7519324	1.6875-8UN-3A W	1.6007	1.6875 +.0007	1.6548 -.0007	1.60070 +.00025	.00025	5	.0156
2	7519325	1.6875-12UN-2A W	1.6256	1.6857 +.0006	1.6617 -.0006	1.62560 +.00025	.0002	6	.0104
2	7519326	1.6875-12UN-3A W	1.6289	1.6875 +.0006	1.6650 -.0006	1.62890 +.00025	.0002	6	.0104
2	5220-751-6843	1.6875-16UN-2A W	1.6400	1.6859 +.0006	1.6671 -.0006	1.64000 +.00025	.00015	8	.0078
2	5220-751-6844	1.6875-16UN-3A W	1.6429	1.6875 +.0006	1.6700 -.0006	1.64290 +.00025	.00015	8	.0078
2	5220-749-8623	1.6875-18UNEF-2A W	1.6448	1.6860 +.0005	1.6689 -.0005	1.6448 +.0002	.00015	8	.0069
2	5220-749-8624	1.6875-18UNEF-3A W	1.6476	1.6875 +.0005	1.6717 -.0005	1.6476 +.0002	.00015	8	.0069
2	7519327	1.6875-20UN-2A W	1.6487	1.6860 +.0005	1.6704 -.0005	1.6487 +.0002	.00015	8	.0062
2	7519328	1.6875-20UN-3A W	1.6514	1.6875 +.0005	1.6731 -.0005	1.6514 +.0002	.00015	8	.0062
2	5220-749-8626	1.7500-5UNC-2A W	1.6085	1.7473 +.0008	1.6951 -.0008	1.60850 +.00025	.0003	4	.0250
2	5220-749-8627	1.7500-5UNC-3A W	1.6134	1.7500 +.0008	1.7000 -.0008	1.61340 +.00025	.0003	4	.0250

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519329	1.7500-6UN-2A W	1.6309	1.7475 +.0008	1.7031 -.0008	1.63090 +.00025	.0003	5	.0208
2	7519330	1.7500-6UN-3A W	1.6354	1.7500 +.0008	1.7076 -.0008	1.63540 +.00025	.0003	5	.0208
2	5220-749-8629	1.7500-8UN-2A W	1.6590	1.7477 +.0007	1.7131 -.0007	1.65900 +.00025	.00025	5	.0156
2	5220-749-8630	1.7500-8UN-3A W	1.6632	1.7500 +.0007	1.7173 -.0007	1.66320 +.00025	.00025	5	.0156
2	5220-749-8632	1.7500-12UN-2A W	1.6881	1.7482 +.0006	1.7242 -.0006	1.68810 +.00025	.0002	6	.0104
2	5220-749-8633	1.7500-12UN-3A W	1.6914	1.7500 +.0006	1.7275 -.0006	1.69140 +.00025	.0002	6	.0104
2	5220-749-8635	1.7500-16UN-2A W	1.7025	1.7484 +.0006	1.7296 -.0006	1.70250 +.00025	.00015	8	.0078
2	5220-749-8636	1.7500-16UN-3A W	1.7054	1.7500 +.0006	1.7325 -.0006	1.70540 +.00025	.00015	8	.0078
2	7519331	1.7500-20UN-2A W	1.7112	1.7485 +.0005	1.7329 -.0005	1.7112 +.0002	.00015	8	.0062
2	7519332	1.7500-20UN-3A W	1.7139	1.7500 +.0005	1.7356 -.0005	1.7139 +.0002	.00015	8	.0062
2	7519333	1.8125-6UN-2A W	1.6933	1.8100 +.0008	1.7655 -.0008	1.69330 +.00025	.0003	5	.0208
2	7519334	1.8125-6UN-3A W	1.6979	1.8125 +.0008	1.7701 -.0008	1.69790 +.00025	.0003	5	.0208
2	7519335	1.8125-8UN-2A W	1.7214	1.8102 +.0007	1.7755 -.0007	1.72140 +.00025	.00025	5	.0156
2	7519336	1.8125-8UN-3A W	1.7256	1.8125 +.0007	1.7797 -.0007	1.72560 +.00025	.00025	5	.0156
2	7519337	1.8125-12UN-2A W	1.7506	1.8107 +.0006	1.7867 -.0006	1.75060 +.00025	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519338	1.8125-12UN-3A W	1.7539	1.8125 + 0006	1.7900 -.0006	1.75390 +.00025	.0002	6	.0104
2	5220-749-8638	1.8125-16UN-2A W	1.7650	1.8109 +.0006	1.7921 -.0006	1.76500 +.00025	.00015	8	.0078
2	5220-749-8639	1.8125-16UN-3A W	1.7679	1.8125 +.0006	1.7950 -.0006	1.76790 +.00025	.00015	8	.0078
2	7519339	1.8125-20UN-2A W	1.7737	1.8110 +.0005	1.7954 -.0005	1.7737 +.0002	.00015	8	.0062
2	7519340	1.8125-20UN-3A W	1.7764	1.8125 +.0005	1.7981 -.0005	1.7764 +.0002	.00015	8	.0062
2	7519341	1.8750-6UN-2A W	1.7558	1.8725 +.0008	1.8280 -.0008	1.75580 +.00025	.0003	5	.0208
2	7519342	1.8750-6UN-3A W	1.7604	1.8750 +.0008	1.8326 -.0008	1.76040 +.00025	.0003	5	.0208
2	5220-749-8641	1.8750-8UN-2A W	1.7838	1.8727 +.0007	1.8379 -.0007	1.78380 +.00025	.00025	5	.0156
2	5220-749-8642	1.8750-8UN-3A W	1.7881	1.8750 +.0007	1.8422 -.0007	1.78810 +.00025	.00025	5	.0156
2	5220-749-8644	1.8750-12UN-2A W	1.8131	1.8732 +.0006	1.8492 -.0006	1.81310 +.00025	.0002	6	.0104
2	5220-749-8645	1.8750-12UN-3A W	1.8164	1.8750 +.0006	1.8525 -.0006	1.81640 +.00025	.0002	6	.0104
2	5220-749-8647	1.8750-16UN-2A W	1.8275	1.8734 +.0006	1.8546 -.0006	1.82750 +.00025	.00015	8	.0078
2	5220-749-8648	1.8750-16UN-3A W	1.8304	1.8750 +.0006	1.8575 -.0006	1.83040 +.00025	.00015	8	.0078
2	7519343	1.8750-20UN-2A W	1.8362	1.8735 +.0005	1.8579 -.0005	1.8362 +.0002	.00015	8	.0062
2	7519344	1.8750-20UN-3A W	1.8389	1.8750 +.0005	1.8606 -.0005	1.8389 +.0002	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519345	1.9375-6UN-2A W	1.8181	1.9349 +.0008	1.8903 -.0008	1.81810 +.00025	.0003	5	.0208
2	7519346	1.9375-6UN-3A W	1.8228	1.9375 +.0008	1.8950 -.0008	1.82280 +.00025	.0003	5	.0208
2	7519347	1.9375-8UN-2A W	1.8463	1.9352 +.0007	1.9004 -.0007	1.84630 +.00025	.00025	5	.0156
2	7519348	1.9375-8UN-3A W	1.8505	1.9375 +.0007	1.9046 -.0007	1.85050 +.00025	.00025	5	.0156
2	7519349	1.9375-12UN-2A W	1.8755	1.9357 +.0006	1.9116 -.0006	1.87550 +.00025	.0002	6	.0104
2	7519350	1.9375-12UN-3A W	1.8789	1.9375 +.0006	1.9150 -.0006	1.87890 +.00025	.0002	6	.0104
2	5220-749-8650	1.9375-16UN-2A W	1.8899	1.9359 +.0006	1.9170 -.0006	1.88990 +.00025	.00015	8	.0078
2	5220-749-8651	1.9375-16UN-3A W	1.8929	1.9375 +.0006	1.9200 -.0006	1.89290 +.00025	.00015	8	.0078
2	7519351	1.9375-20UN-2A W	1.8986	1.9360 +.0005	1.9203 -.0005	1.8986 +.0002	.00015	8	.0062
2	7519352	1.9375-20UN-3A W	1.9013	1.9375 +.0005	1.9230 -.0005	1.9013 +.0002	.00015	8	.0062
2	5220-749-8653	2.0000-4-1/2UNC-2A W	1.8433	1.9971 +.0008	1.9395 -.0008	1.84330 +.00025	.0003	4	.0278
2	5220-749-8654	2.0000-4-1/2UNC-3A W	1.8486	2.0000 +.0008	1.9448 -.0008	1.84860 +.00025	.0003	4	.0278
2	7519353	2.0000-6UN-2A W	1.8805	1.9974 +.0008	1.9527 -.0008	1.88050 +.00025	.0003	5	.0208
2	7519354	2.0000-6UN-3A W	1.8853	2.0000 +.0008	1.9575 -.0008	1.88530 +.00025	.0003	5	.0208
2	5220-749-8656	2.0000-8UN-2A W	1.9087	1.9977 +.0007	1.9628 -.0007	1.90870 +.00025	.00025	5	.0156

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8657	2.0000-8UN-3A W	1.9130	2.0000 +.0007	1.9671 -.0007	1.91300 +.00025	.00025	5	.0156
2	5220-749-8659	2.0000-12UN-2A W	1.9380	1.9982 +.0006	1.9741 -.0006	1.93800 +.00025	.0002	6	.0104
2	5220-749-8660	2.0000-12UN-3A W	1.9414	2.0000 +.0006	1.9775 -.0006	1.94140 +.00025	.0002	6	.0104
2	5220-749-8662	2.0000-16UN-2A W	1.9524	1.9984 +.0006	1.9795 -.0006	1.95240 +.00025	.00015	8	.0078
2	5220-749-8663	2.0000-16UN-3A W	1.9554	2.0000 +.0006	1.9825 -.0006	1.95540 +.00025	.00015	8	.0078
2	7519355	2.0000-20UN-2A W	1.9611	1.9985 +.0005	1.9828 -.0005	1.9611 +.0002	.00015	8	.0062
2	7519356	2.0000-20UN-3A W	1.9638	2.0000 +.0005	1.9855 -.0005	1.9638 +.0002	.00015	8	.0062
2	7519357	2.1250-6UN-2A W	2.0054	2.1224 +.0008	2.0776 -.0008	2.00540 +.00025	.0003	5	.0208
2	7519358	2.1250-6UN-3A W	2.0102	2.1250 +.0008	2.0824 -.0008	2.01020 +.00025	.0003	5	.0208
2	5220-749-8668	2.1250-8UN-2A W	2.0335	2.1226 +.0007	2.0876 -.0007	2.03350 +.00025	.00025	5	.0156
2	5220-749-8669	2.1250-8UN-3A W	2.0379	2.1250 +.0007	2.0920 -.0007	2.03790 +.00025	.00025	5	.0156
2	5220-749-8671	2.1250-12UN-2A W	2.0630	2.1232 +.0006	2.0991 -.0006	2.06300 +.00025	.0002	6	.0104
2	5220-749-8672	2.1250-12UN-3A W	2.0664	2.1250 +.0006	2.1025 -.0006	2.06640 +.00025	.0002	6	.0104
2	5220-749-8674	2.1250-16UN-2A W	2.0774	2.1234 +.0006	2.1045 -.0006	2.07740 +.00025	.00015	8	.0078
2	5220-749-8675	2.1250-16UN-3A W	2.0804	2.1250 +.0006	2.1075 -.0006	2.08040 +.00025	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519359	2.1250-20UN-2A W	2.0861	2.1235 +.0005	2.1078 -.0005	2.0861 +.0002	.00015	8	.0062
2	7519360	2.1250-20UN-3A W	2.0888	2.1250 +.0005	2.1105 -.0005	2.0888 +.0002	.00015	8	.0062
2	5220-749-8680	2.2500-4-1/2UNC-2A W	2.0931	2.2471 +.0008	2.1893 -.0008	2.09310 +.00025	.0003	4	.0278
2	5220-749-8681	2.2500-4-1/2UNC-3A W	2.0984	2.2500 +.0008	2.1946 -.0008	2.09840 +.00025	.0003	4	.0278
2	7519361	2.2500-6UN-2A W	2.1303	2.2474 +.0008	2.2025 -.0008	2.13030 +.00025	.0003	5	.0208
2	7519362	2.2500-6UN-3A W	2.1351	2.2500 +.0008	2.2073 -.0008	2.13510 +.00025	.0003	5	.0208
2	5220-749-8683	2.2500-8UN-2A W	2.1584	2.2476 +.0007	2.2125 -.0007	2.15840 +.00025	.00025	5	.0156
2	5220-749-8684	2.2500-8UN-3A W	2.1628	2.2500 +.0007	2.2169 -.0007	2.16280 +.00025	.00025	5	.0156
2	5220-749-8686	2.2500-12UN-2A W	2.1880	2.2482 +.0006	2.2241 -.0006	2.18800 +.00025	.0002	6	.0104
2	5220-749-8687	2.2500-12UN-3A W	2.1914	2.2500 +.0006	2.2275 -.0006	2.19140 +.00025	.0002	6	.0104
2	5220-749-8689	2.2500-16UN-2A W	2.2024	2.2484 +.0006	2.2295 -.0006	2.20240 +.00025	.00015	8	.0078
2	5220-749-8690	2.2500-16UN-3A W	2.2054	2.2500 +.0006	2.2325 -.0006	2.20540 +.00025	.00015	8	.0078
2	7519363	2.2500-20UN-2A W	2.2111	2.2485 +.0005	2.2328 -.0005	2.2111 +.0002	.00015	8	.0062
2	7519364	2.2500-20UN-3A W	2.2137	2.2500 +.0005	2.2354 -.0005	2.2137 +.0002	.00015	8	.0062
2	7519365	2.3750-6UN-2A W	2.2551	2.3723 +.0008	2.3273 -.0008	2.25510 +.00025	.0003	5	.0208

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519366	2.3750-6UN-3A W	2.2601	2.3750 +.0008	2.3323 -.0008	2.26010 +.00025	.0003	5	.0208
2	7519367	2.3750-8UN-2A W	2.2833	2.3726 +.0007	2.3374 -.0007	2.28330 +.00025	.00025	5	.0156
2	7519368	2.3750-8UN-3A W	2.2878	2.3750 +.0007	2.3419 -.0007	2.28780 +.00025	.00025	5	.0156
2	5220-749-8695	2.3750-12UN-2A W	2.3128	2.3731 +.0006	2.3489 -.0006	2.31280 +.00025	.0002	6	.0104
2	5220-749-8696	2.3750-12UN-3A W	2.3163	2.3750 +.0006	2.3524 -.0006	2.31630 +.00025	.0002	6	.0104
2	5220-749-8698	2.3750-16UN-2A W	2.3272	2.3733 +.0006	2.3543 -.0006	2.32720 +.00025	.00015	8	.0078
2	5220-749-8699	2.3750-16UN-3A W	2.3303	2.3750 +.0006	2.3574 -.0006	2.33030 +.00025	.00015	8	.0078
2	7519369	2.3750-20UN-2A W	2.3359	2.3734 +.0005	2.3576 -.0005	2.3359 +.0002	.00015	8	.0062
2	7519370	2.3750-20UN-3A W	2.3387	2.3750 +.0005	2.3604 -.0005	2.3387 +.0002	.00015	8	.0062
2	5220-749-8704	2.5000-4UNC-2A W	2.3241	2.4969 +.0009	2.4324 -.0009	2.32410 +.00025	.0003	4	.0312
2	5220-749-8705	2.5000-4UNC-3A W	2.3298	2.5000 +.0009	2.4381 -.0009	2.32980 +.00025	.0003	4	.0312
2	7519371	2.5000-6UN-2A W	2.3800	2.4973 +.0008	2.4522 -.0008	2.38000 +.00025	.0003	5	.0208
2	7519372	2.5000-6UN-3A W	2.3850	2.5000 +.0008	2.4572 -.0008	2.38500 +.00025	.0003	5	.0208
2	5220-749-8707	2.5000-8UN-2A W	2.4082	2.4976 +.0007	2.4623 -.0007	2.40820 +.00025	.00025	5	.0156
2	5220-749-8708	2.5000-8UN-3A W	2.4127	2.5000 +.0007	2.4668 -.0007	2.41270 +.00025	.00025	5	.0156

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8710	2.5000-12UN-2A W	2.4378	2.4981 +.0006	2.4739 -.0006	2.43780 +.00025	.0002	6	.0104
2	5220-749-8711	2.5000-12UN-3A W	2.4413	2.5000 +.0006	2.4774 -.0006	2.44130 +.00025	.0002	6	.0104
2	5220-749-8713	2.5000-16UN-2A W	2.4522	2.4983 +.0006	2.4793 -.0006	2.45220 +.00025	.00015	8	.0078
2	5220-749-8714	2.5000-16UN-3A W	2.4553	2.5000 +.0006	2.4824 -.0006	2.45530 +.00025	.00015	8	.0078
2	7519373	2.5000-20UN-2A W	2.4609	2.4984 +.0005	2.4826 -.0005	2.4609 +.0002	.00015	8	.0062
2	7519374	2.5000-20UN-3A W	2.4637	2.5000 +.0005	2.4854 -.0005	2.4637 +.0002	.00015	8	.0062
2	7519375	2.6250-6UN-2A W	2.5050	2.6223 +.0008	2.5772 -.0008	2.50500 +.00025	.0003	5	.0208
2	7519376	2.6250-6UN-3A W	2.5099	2.6250 +.0008	2.5821 -.0008	2.50990 +.00025	.0003	5	.0208
2	7519377	2.6250-8UN-2A W	2.5331	2.6225 +.0007	2.5872 -.0007	2.53310 +.00025	.00025	5	.0156
2	7519378	2.6250-8UN-3A W	2.5376	2.6250 +.0007	2.5917 -.0007	2.53760 +.00025	.00025	5	.0156
2	5220-749-8716	2.6250-12UN-2A W	2.5628	2.6231 +.0006	2.5989 -.0006	2.56280 +.00025	.0002	6	.0104
2	5220-749-8717	2.6250-12UN-3A W	2.5663	2.6250 +.0006	2.6024 -.0006	2.56630 +.00025	.0002	6	.0104
2	5220-749-8719	2.6250-16UN-2A W	2.5772	2.6233 +.0006	2.6043 -.0006	2.57720 +.00025	.00015	8	.0078
2	5220-749-8720	2.6250-16UN-3A W	2.5803	2.6250 +.0006	2.6074 -.0006	2.58030 +.00025	.00015	8	.0078
2	7519379	2.6250-20UN-2A W	2.5859	2.6234 +.0005	2.6076 -.0005	2.5859 +.0002	.00015	8	.0062

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519380	2.6250-20UN-3A W	2.5887	2.6250 +.0005	2.6104 -.0005	2.5887 +.0002	.00015	8	.0062
2	5220-749-8722	2.7500-4UNC-2A W	2.5739	2.7468 +.0009	2.6822 -.0009	2.57390 +.00025	.0003	4	.0312
2	5220-749-8723	2.7500-4UNC-3A W	2.5797	2.7500 +.0009	2.6880 -.0009	2.57970 +.00025	.0003	4	.0312
2	7519381	2.7500-6UN-2A W	2.6299	2.7473 +.0008	2.7021 -.0008	2.62990 +.00025	.0003	5	.0208
2	7519382	2.7500-6UN-3A W	2.6349	2.7500 +.0008	2.7071 -.0008	2.63490 +.00025	.0003	5	.0208
2	5220-749-8725	2.7500-8UN-2A W	2.6580	2.7475 +.0007	2.7121 -.0007	2.65800 +.00025	.00025	5	.0156
2	5220-749-8726	2.7500-8UN-3A W	2.6626	2.7500 +.0007	2.7167 -.0007	2.66260 +.00025	.00025	5	.0156
2	5220-749-8728	2.7500-12UN-2A W	2.6878	2.7481 +.0006	2.7239 -.0006	2.68780 +.00025	.0002	6	.0104
2	5220-749-8729	2.7500-12UN-3A W	2.6913	2.7500 +.0006	2.7274 -.0006	2.69130 +.00025	.0002	6	.0104
2	5220-749-8731	2.7500-16UN-2A W	2.7022	2.7483 +.0006	2.7293 -.0006	2.70220 +.00025	.00015	8	.0078
2	5220-749-8732	2.7500-16UN-3A W	2.7053	2.7500 +.0006	2.7324 -.0006	2.70530 +.00025	.00015	8	.0078
2	7519383	2.7500-20UN-2A W	2.7109	2.7484 +.0005	2.7326 -.0005	2.7109 +.0002	.00015	8	.0062
2	7519384	2.7500-20UN-3A W	2.7137	2.7500 +.0005	2.7354 -.0005	2.7137 +.0002	.00015	8	.0062
2	7519385	2.8750-6UN-2A W	2.7547	2.8722 +.0008	2.8269 -.0008	2.75470 +.00025	.0003	5	.0208
2	7519386	2.8750-6UN-3A W	2.7598	2.8750 +.0008	2.8320 -.0008	2.75980 +.00025	.0003	5	.0208

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519387	2.8750-8UN-2A W	2.7829	2.8725 +.0007	2.8370 -.0007	2.78290 +.00025	.00025	5	.0156
2	7519388	2.8750-8UN-3A W	2.7875	2.8750 +.0007	2.8416 -.0007	2.78750 +.00025	.00025	5	.0156
2	5220-749-8734	2.8750-12UN-2A W	2.8127	2.8731 +.0006	2.8488 -.0006	2.81270 +.00025	.0002	6	.0104
2	5220-749-8735	2.8750-12UN-3A W	2.8162	2.8750 +.0006	2.8523 -.0006	2.81620 +.00025	.0002	6	.0104
2	5220-749-8737	2.8750-16UN-2A W	2.8271	2.8733 +.0006	2.8542 -.0006	2.82710 +.00025	.00015	8	.0078
2	5220-749-8738	2.8750-16UN-3A W	2.8302	2.8750 +.0006	2.8573 -.0006	2.83020 +.00025	.00015	8	.0078
2	7519389	2.8750-20UN-2A W	2.8357	2.8732 +.0005	2.8574 -.0005	2.8357 +.0002	.00015	8	.0062
2	7519390	2.8750-20UN-3A W	2.8386	2.8750 +.0005	2.8603 -.0005	2.8386 +.0002	.00015	8	.0062
2	5220-749-8740	3.0000-4UNC-2A W	2.8237	2.9968 +.0009	2.9320 -.0009	2.82370 +.00025	.0003	4	.0312
2	5220-749-8741	3.0000-4UNC-3A W	2.8296	3.0000 +.0009	2.9379 -.0009	2.82960 +.00025	.0003	4	.0312
2	7519391	3.0000-6UN-2A W	2.8796	2.9972 +.0008	2.9518 -.0008	2.87960 +.00025	.0003	5	.0208
2	7519392	3.0000-6UN-3A W	2.8847	3.0000 +.0008	2.9569 -.0008	2.88470 +.00025	.0003	5	.0208
2	5220-749-8743	3.0000-8UN-2A W	2.9077	2.9974 +.0007	2.9618 -.0007	2.90770 +.00025	.00025	5	.0156
2	5220-749-8744	3.0000-8UN-3A W	2.9124	3.0000 +.0007	2.9665 -.0007	2.91240 +.00025	.00025	5	.0156
2	5220-749-8746	3.0000-12UN-2A W	2.9377	2.9981 +.0006	2.9738 -.0006	2.93770 +.00025	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8747	3.0000-12UN-3A W	2.9412	3.0000 +.0006	2.9773 -.0006	2.94120 +.00025	.0002	6	.0104
2	5220-749-8749	3.0000-16UN-2A W	2.9521	2.9983 +.0006	2.9792 -.0006	2.95210 +.00025	.00015	8	.0078
2	5220-749-8750	3.0000-16UN-3A W	2.9552	3.0000 +.0006	2.9823 -.0006	2.95520 +.00025	.00015	8	.0078
2	7519393	3.0000-20UN-2A W	2.9607	2.9982 +.0005	2.9824 -.0005	2.9607 +.0002	.00015	8	.0062
2	7519394	3.0000-20UN-3A W	2.9636	3.0000 +.0005	2.9853 -.0005	2.9636 +.0002	.00015	8	.0062
2	7519395	3.1250-6UN-2A W	3.0045	3.1222 +.0008	3.0767 -.0008	3.00450 +.00025	.0003	5	.0208
2	7519396	3.1250-6UN-3A W	3.0097	3.1250 +.0008	3.0819 -.0008	3.00970 +.00025	.0003	5	.0208
2	7519397	3.1250-8UN-2A W	3.0326	3.1224 +.0007	3.0867 -.0007	3.03260 +.00025	.00025	5	.0156
2	7519398	3.1250-8UN-3A W	3.0374	3.1250 +.0007	3.0915 -.0007	3.03740 +.00025	.00025	5	.0156
2	5220-749-8752	3.1250-12UN-2A W	3.0627	3.1231 +.0006	3.0988 -.0006	3.06270 +.00025	.0002	6	.0104
2	5220-749-8753	3.1250-12UN-3A W	3.0662	3.1250 +.0006	3.1023 -.0006	3.06620 +.00025	.0002	6	.0104
2	5220-749-8755	3.1250-16UN-2A W	3.0771	3.1233 +.0006	3.1042 -.0006	3.07710 +.00025	.00015	8	.0078
2	5220-749-8756	3.1250-16UN-3A W	3.0802	3.1250 +.0006	3.1073 -.0006	3.08020 +.00025	.00015	8	.0078
2	5220-749-8758	3.2500-4UNC-2A W	3.0734	3.2467 +.0009	3.1817 -.0009	3.07340 +.00025	.0003	4	.0312
2	5220-749-8759	3.2500-4UNC-3A W	3.0794	3.2500 +.0009	3.1877 -.0009	3.07940 +.00025	.0003	4	.0312

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519399	3.2500-6UN-2A W	3.1294	3.2472 +.0008	3.2016 -.0008	3.12940 +.00025	.0003	5	.0208
2	7519400	3.2500-6UN-3A W	3.1346	3.2500 +.0008	3.2068 -.0008	3.13460 +.00025	.0003	5	.0208
2	5220-749-8761	3.2500-8UN-2A W	3.1575	3.2474 +.0007	3.2116 -.0007	3.15750 +.00025	.00025	5	.0156
2	5220-749-8762	3.2500-8UN-3A W	3.1623	3.2500 +.0007	3.2164 -.0007	3.16230 +.00025	.00025	5	.0156
2	5220-749-8764	3.2500-12UN-2A W	3.1877	3.2481 +.0006	3.2238 -.0006	3.18770 +.00025	.0002	6	.0104
2	5220-749-8765	3.2500-12UN-3A W	3.1912	3.2500 +.0006	3.2273 -.0006	3.19120 +.00025	.0002	6	.0104
2	5220-749-8767	3.2500-16UN-2A W	3.2021	3.2483 +.0006	3.2292 -.0006	3.20210 +.00025	.00015	8	.0078
2	5220-749-8768	3.2500-16UN-3A W	3.2052	3.2500 +.0006	3.2323 -.0006	3.20520 +.00025	.00015	8	.0078
2	7519401	3.3750-6UN-2A W	3.2543	3.3721 +.0008	3.3265 -.0008	3.25430 +.00025	.0003	5	.0208
2	7519402	3.3750-6UN-3A W	3.2595	3.3750 +.0008	3.3317 -.0008	3.25950 +.00025	.0003	5	.0208
2	7519403	3.3750-8UN-2A W	3.2824	3.3724 +.0007	3.3365 -.0007	3.28240 +.00025	.00025	5	.0156
2	7519404	3.3750-8UN-3A W	3.2872	3.3750 +.0007	3.3413 -.0007	3.28720 +.00025	.00025	5	.0156
2	5220-749-8770	3.3750-12UN-2A W	3.3126	3.3731 +.0006	3.3487 -.0006	3.31260 +.00025	.0002	6	.0104
2	5220-749-8771	3.3750-12UN-3A W	3.3161	3.3750 +.0006	3.3522 -.0006	3.31610 +.00025	.0002	6	.0104
2	5220-749-8773	3.3750-16UN-2A W	3.3269	3.3733 +.0006	3.3540 -.0006	3.32690 +.00025	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		LO PITCH DIA	TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION		MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8774	3.3750-16UN-3A W	3.3301	3.3750 +.0006	3.3572 -.0006	3.33010 +.00025	.00015	8	.0078
2	5220-749-8776	3.5000-4UNC-2A W	3.3233	3.4967 +.0009	3.4316 -.0009	3.32330 +.00025	.0003	4	.0312
2	5220-749-8777	3.5000-4UNC-3A W	3.3293	3.5000 +.0009	3.4376 -.0009	3.32930 +.00025	.0003	4	.0312
2	7519405	3.5000-6UN-2A W	3.3792	3.4971 +.0008	3.4514 -.0008	3.37920 +.00025	.0003	5	.0208
2	7519406	3.5000-6UN-3A W	3.3845	3.5000 +.0008	3.4567 -.0008	3.38450 +.00025	.0003	5	.0208
2	5220-749-8779	3.5000-8UN-2A W	3.4074	3.4974 +.0007	3.4615 -.0007	3.40740 +.00025	.00025	5	.0156
2	5220-749-8780	3.5000-8UN-3A W	3.4122	3.5000 +.0007	3.4663 -.0007	3.41220 +.00025	.00025	5	.0156
2	5220-749-8782	3.5000-12UN-2A W	3.4376	3.4981 +.0006	3.4737 -.0006	3.43760 +.00025	.0002	6	.0104
2	5220-749-8783	3.5000-12UN-3A W	3.4411	3.5000 +.0006	3.4772 -.0006	3.44110 +.00025	.0002	6	.0104
2	5220-749-8785	3.5000-16UN-2A W	3.4519	3.4983 +.0006	3.4790 -.0006	3.45190 +.00025	.00015	8	.0078
2	5220-749-8786	3.5000-16UN-3A W	3.4551	3.5000 +.0006	3.4822 -.0006	3.45510 +.00025	.00015	8	.0078
2	7519407	3.6250-6UN-2A W	3.5041	3.6221 +.0008	3.5763 -.0008	3.50410 +.00025	.0003	5	.0208
2	7519408	3.6250-6UN-3A W	3.5094	3.6250 +.0008	3.5816 -.0008	3.50940 +.00025	.0003	5	.0208
2	7519409	3.6250-8UN-2A W	3.5322	3.6223 +.0007	3.5863 -.0007	3.53220 +.00025	.00025	5	.0156
2	7519410	3.6250-8UN-3A W	3.5371	3.6250 +.0007	3.5912 -.0007	3.53710 +.00025	.00025	5	.0156

ORDBA Form 20-1413, (OT) Rev 15 Ma 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8788	3.6250-12UN-2A W	3.5626	3.6231 +.0006	3.5987 -.0006	3.56260 +.00025	.0002	6	.0104
2	5220-749-8789	3.6250-12UN-3A W	3.5661	3.6250 +.0006	3.6022 -.0006	3.56610 +.00025	.0002	6	.0104
2	5220-749-8791	3.6250-16UN-2A W	3.5769	3.6233 +.0006	3.6040 -.0006	3.57690 +.00025	.00015	8	.0078
2	5220-749-8792	3.6250-16UN-3A W	3.5801	3.6250 +.0006	3.6072 -.0006	3.58010 +.00025	.00015	8	.0078
2	5220-749-8794	3.7500-4UNC-2A W	3.5730	3.7466 +.0009	3.6813 -.0009	3.57300 +.00025	.0003	4	.0312
2	5220-749-8795	3.7500-4UNC-3A W	3.5792	3.7500 +.0009	3.6875 -.0009	3.57920 +.00025	.0003	4	.0312
2	7519411	3.7500-6UN-2A W	3.6290	3.7471 +.0008	3.7012 -.0008	3.62900 +.00025	.0003	5	.0208
2	7519412	3.7500-6UN-3A W	3.6344	3.7500 +.0008	3.7066 -.0008	3.63440 +.00025	.0003	5	.0208
2	5220-749-8797	3.7500-8UN-2A W	3.6571	3.7473 +.0007	3.7112 -.0007	3.65710 +.00025	.00025	5	.0156
2	5220-749-8798	3.7500-8UN-3A W	3.6621	3.7500 +.0007	3.7162 -.0007	3.66210 +.00025	.00025	5	.0156
2	5220-749-8800	3.7500-12UN-2A W	3.6876	3.7481 +.0006	3.7237 -.0006	3.68760 +.00025	.0002	6	.0104
2	5220-749-8801	3.7500-12UN-3A W	3.6911	3.7500 +.0006	3.7272 -.0006	3.69110 +.00025	.0002	6	.0104
2	5220-749-8803	3.7500-16UN-2A W	3.7019	3.7483 +.0006	3.7290 -.0006	3.70190 +.00025	.00015	8	.0078
2	5220-749-8804	3.7500-16UN-3A W	3.7051	3.7500 +.0006	3.7322 -.0006	3.70510 +.00025	.00015	8	.0078
2	7519413	3.8750-6UN-2A W	3.7538	3.8720 +.0008	3.8260 -.0008	3.75380 +.00025	.0003	5	.0208

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519414	3.8750-6UN-3A W	3.7593	3.8750 +.0008	3.8315 -.0008	3.75930 +.00025	.0003	5	.0208
2	7519415	3.8750-8UN-2A W	3.7820	3.8723 +.0007	3.8361 -.0007	3.78200 +.00025	.00025	5	.0156
2	7519416	3.8750-8UN-3A W	3.7870	3.8750 +.0007	3.8411 -.0007	3.78700 +.00025	.00025	5	.0156
2	5220-749-8806	3.8750-12UN-2A W	3.8124	3.8730 +.0006	3.8485 -.0006	3.81240 +.00025	.0002	6	.0104
2	5220-749-8807	3.8750-12UN-3A W	3.8160	3.8750 +.0006	3.8521 -.0006	3.81600 +.00025	.0002	6	.0104
2	5220-749-8809	3.8750-16UN-2A W	3.8267	3.8732 +.0006	3.8538 -.0006	3.82670 +.00025	.00015	8	.0078
2	5220-749-8810	3.8750-16UN-3A W	3.8300	3.8750 +.0006	3.8571 -.0006	3.83000 +.00025	.00015	8	.0078
2	5220-749-8812	4.0000-4UNC-2A W	3.8229	3.9966 +.0009	3.9312 -.0009	3.82290 +.00025	.0003	4	.0312
2	5220-749-8813	4.0000-4UNC-3A W	3.8291	4.0000 +.0009	3.9374 -.0009	3.82910 +.00025	.0003	4	.0312
2	7519417	4.0000-6UN-2A W	3.8788	3.9970 +.0008	3.9510 -.0008	3.87880 +.00025	.0003	5	.0208
2.	7519418	4.0000-6UN-3A W	3.8843	4.0000 +.0008	3.9565 -.0008	3.88430 +.00025	.0003	5	.0208
2	5220-749-8815	4.0000-8UN-2A W	3.9070	3.9973 +.0007	3.9611 -.0007	3.90700 +.00025	.00025	5	.0156
2	5220-749-8816	4.0000-8UN-3A W	3.9120	4.0000 +.0007	3.9661 -.0007	3.91200 +.00025	.00025	5	.0156
2	5220-749-8818	4.0000-12UN-2A W	3.9374	3.9980 +.0006	3.9735 -.0006	3.93740 +.00025	.0002	6	.0104
2	5220-749-8819	4.0000-12UN-3A W	3.9410	4.0000 +.0006	3.9771 -.0006	3.94100 +.00025	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8821	4.0000-16UN-2A W	3.9517	3.9982 +.0006	3.9788 -.0006	3.95170 +.00025	.00015	8	.0078
2	5220-749-8822	4.0000-16UN-3A W	3.9550	4.0000 +.0006	3.9821 -.0006	3.95500 +.00025	.00015	8	.0078
2	7519419	4.1250-6UN-2A W	4.0037	4.1220 +.0013	4.0759 -.0013	4.0037 +.0003	.0003	5	.0208
2	7519420	4.1250-6UN-3A W	4.0092	4.1250 +.0013	4.0814 -.0013	4.0092 +.0003	.0003	5	.0208
2	7519421	4.1250-12UN-2A W	4.0624	4.1230 +.0009	4.0985 -.0009	4.0624 +.0003	.0002	6	.0104
2	7519422	4.1250-12UN-3A W	4.0660	4.1250 +.0009	4.1021 -.0009	4.0660 +.0003	.0002	6	.0104
2	7519423	4.1250-16UN-2A W	4.0767	4.1232 +.0009	4.1038 -.0009	4.0767 +.0003	.00015	8	.0078
2	7519424	4.1250-16UN-3A W	4.0800	4.1250 +.0009	4.1071 -.0009	4.0800 +.0003	.00015	8	.0078
2	7519425	4.2500-4UN-2A W	4.0727	4.2466 +.0015	4.1810 -.0015	4.0727 +.0003	.0003	4	.0312
2	7519426	4.2500-4UN-3A W	4.0790	4.2500 +.0015	4.187 3 -.0015	4.0790 +.0003	.0003	4	.0312
2	7519427	4.2500-6UN-2A W	4.1286	4.2470 +.0013	4.2008 -.0013	4.1286 +.0003	.0003	5	.0208
2	7519428	4.2500-6UN-3A W	4.1342	4.2500 +.0013	4.2064 -.0013	4.1342 +.0003	.0003	5	.0208
2	5220-749-8827	4.2500-12UN-2A W	4.1874	4.2480 +.0009	4.2235 -.0009	4.1874 +.0003	.0002	6	.0104
2	5220-749-8828	4.2500-12UN-3A W	4.1910	4.2500 +.0009	4.2271 -.0009	4.1910 +.0003	.0002	6	.0104
2	5220-749-8830	4.2500-16UN-2A W	4.2017	4.2482 +.0009	4.2288 -.0009	4.2017 +.0003	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8831	4.2500-16UN-3A W	4.2050	4.2500 +.0009	4.2321 -.0009	4.2050 +.0003	.00015	8	.0078
2	7519429	4.3750-6UN-2A W	4.2536	4.3720 +.0013	4.3258 -.0013	4.2536 +.0003	.0003	5	.0208
2	7519430	4.3750-6UN-3A W	4.2591	4.3750 +.0013	4.3313 -.0013	4.2591 +.0003	.0003	5	.0208
2	7519431	4.3750-12UN-2A W	4.3124	4.3730 +.0009	4.3485 -.0009	4.3124 +.0003	.0002	6	.0104
2	7519432	4.3750-12UN-3A W	4.3160	4.3750 +.0009	4.3521 -.0009	4.3160 +.0003	.0002	6	.0104
2	7519433	4.3750-16UN-2A W	4.3267	4.3732 +.0009	4.3538 -.0009	4.3267 +.0003	.00015	8	.0078
2	7519434	4.3750-16UN-3A W	4.3300	4.3750 +.0009	4.3571 -.0009	4.3300 +.0003	.00015	8	.0078
2	7519435	4.5000-4UN-2A W	4.3225	4.4965 +.0015	4.4308 -.0015	4.3225 +.0003	.0003	4	.0312
2	7519436	4.5000-4UN-3A W	4.3289	4.5000 +.0015	4.4372 -.0015	4.3289 +.0003	.0003	4	.0312
2	7519437	4.5000-6UN-2A W	4.3784	4.4969 +.0013	4.4506 -.0013	4.3784 +.0003	.0003	5	.0208
2	7519438	4.5000-6UN-3A W	4.3840	4.5000 +.0013	4.4562 -.0013	4.3840 +.0003	.0003	5	.0208
2	5220-749-8835	4.5000-12UN-2A W	4.4374	4.4980 +.0009	4.4735 -.0009	4.4374 +.0003	.0002	6	.0104
2	5220-749-8836	4.5000-12UN-3A W	4.4410	4.5000 +.0009	4.4771 -.0009	4.4410 +.0003	.0002	6	.0104
2	5220-749-8838	4.5000-16UN-2A W	4.4517	4.4982 +.0009	4.4788 -.0009	4.4517 +.0003	.00015	8	.0078
2	5220-749-8839	4.5000-16UN-3A W	4.4550	4.5000 +.0009	4.4821 -.0009	4.4550 +.0003	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519439	4.6250-6UN-2A W	4.5033	9.6219 +.0013	4.5755 -.0013	4.5033 +.0003	.0003	5	.0208
2	7519440	4.6250-6UN-3A W	4.5090	4.6250 +.0013	4.5812 -.0013	4.5090 +.0003	.0003	5	.0208
2	7519441	4.6250-12UN-2A W	4.5622	4.6230 +.0009	4.5983 -.0009	4.5622 +.0003	.0002	6	.0104
2	7519442	4.6250-12UN-3A W	4.5659	4.6250 +.0009	4.6020 -.0009	4.5659 +.0003	.0002	6	.0104
2	7519443	4.6250-16UN-2A W	4.5765	4.6232 +.0009	4.6036 -.0009	4.5765 +.0003	.00015	8	.0078
2	7519444	4.6250-16UN-3A W	4.5799	4.6250 +.0009	4.6070 -.0009	4.5799 +.0003	.00015	8	.0078
2	7519445	4.7500-4UN-2A W	4.5724	4.7465 +.0015	4.6807 -.0015	4.5724 +.0003	.0003	4	.0312
2	7519446	4.7500-4UN-3A W	4.5788	4.7500 +.0015	4.6871 -.0015	4.5788 +.0003	.0003	4	.0312
2	7519447	4.7500-6UN-2A W	4.6283	4.7469 +.0013	4.7005 -.0013	4.6283 +.0003	.0003	5	.0208
2	7519448	4.7500-6UN-3A W	4.6340	4.7500 +.0013	4.7062 -.0013	4.6340 +.0003	.0003	5	.0208
2	5220-749-8843	4.7500-12UN-2A W	4.6872	4.7480 +.0009	4.7233 -.0009	4.6872 +.0003	.0002	6	.0104
2	5220-749-8844	4.7500-12UN-3A W	4.6909	4.7500 +.0009	4.7270 -.0009	4.6909 +.0003	.0002	6	.0104
2	5220-749-8846	4.7500-16UN-2A W	4.7015	4.7482 +.0009	4.7286 -.0009	4.7015 +.0003	.00015	8	.0078
2	5220-749-8847	4.7500-16UN-3A W	4.7049	4.7500 +.0009	4.7320 -.0009	4.7049 +.0003	.00015	8	.0078
2	7519449	4.8750-6UN-2A W	4.7532	4.8719 +.0013	4.8254 -.0013	4.7532 +.0003	.0003	5	.0208

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519450	4.8750-6UN-3A W	4.7589	4.8750 +.0013	4.8311 -.0013	4.7589 +.0003	.0003	5	.0208
2	7519451	4.8750-12UN-2A W	4.8122	4.8730 +.0009	4.8483 -.0009	4.8122 +.0003	.0002	6	.0104
2	7519452	4.8750-12UN-3A W	4.8159	4.8750 +.0009	4.8520 -.0009	4.8159 +.0003	.0002	6	.0104
2	7519453	4.8750-16UN-2A W	4.8265	4.8732 +.0009	4.8536 -.0009	4.8265 +.0003	.00015	8	.0078
2	7519454	4.8750-16UN-3A W	4.8299	4.8750 +.0009	4.8570 -.0009	4.8299 +.0003	.00015	8	.0078
2	7519455	5.0000-4UN-2A W	4.8221	4.9964 +.0015	4.9304 -.0015	4.8221 +.0003	.0003	4	.0312
2	7519456	5.0000-4UN-3A W	4.8287	5.0000 +.0015	4.9370 -.0015	4.8287 +.0003	.0003	4	.0312
2	7519457	5.0000-6UN-2A W	4.8781	4.9969 +.0013	4.9503 -.0013	4.8781 +.0003	.0003	5	.0208
2	7519458	5.0000-6UN-3A W	4.8839	5.0000 +.0013	4.9561 -.0013	4.8839 +.0003	.0003	5	.0208
2	5220-749-8851	5.0000-12UN-2A W	4.9372	4.9980 +.0009	4.9733 -.0009	4.9372 +.0003	.0002	6	.0104
2	5220-749-8852	5.0000-12UN-3A W	4.9409	5.0000 +.0009	4.9770 -.0009	4.9409 +.0003	.0002	6	.0104
2	5220-749-8854	5.0000-16UN-2A W	4.9515	4.9982 +.0009	4.9786 -.0009	4.9515 +.0003	.00015	8	.0078
2	5220-749-8855	5.0000-16UN-3A W	4.9549	5.0000 +.0009	4.9820 -.0009	4.9549 +.0003	.00015	8	.0078
2	7519459	5.1250-12UN-2A W	5.0622	5.1230 +.0009	5.0983 -.0009	5.0622 +.0003	.0002	6	.0104
2	7519460	5.1250-12UN-3A W	5.0659	5.1250 +.0009	5.1020 -.0009	5.0659 +.0003	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519461	5.1250-16UN-2A W	5.0765	5.1232 +.0009	5.1036 -.0009	5.0765 +.0003	.00015	8	.0078
2	7519462	5.1250-16UN-3A W	5.0799	5.1250 +.0009	5.1070 -.0009	5.0799 +.0003	.00015	8	.0078
2	7519463	5.2500-4UN-2A W	5.0720	5.2464 +.0015	5.1803 -.0015	5.0720 +.0003	.0003	4	.0312
2	7519464	5.2500-4UN-3A W	5.0786	5.2500 +.0015	5.1869 -.0015	5.0786 +.0003	.0003	4	.0312
2	5220-749-8859	5.2500-12UN-2A W	5.1872	5.2480 +.0009	5.2233 -.0009	5.1872 +.0003	.0002	6	.0104
2	5220-749-8860	5.2500-12UN-3A W	5.1909	5.2500 +.0009	5.2270 -.0009	5.1909 +.0003	.0002	6	.0104
2	5220-749-8862	5.2500-16UN-2A W	5.2015	5.2482 +.0009	5.2286 -.0009	5.2015 +.0003	.00015	8	.0078
2	5220-749-8863	5.2500-16UN-3A W	5.2049	5.2500 +.0009	5.2320 -.0009	5.2049 +.0003	.00015	8	.0078
2	7519465	5.3750-12UN-2A W	5.3122	5.3730 +.0009	5.3483 -.0009	5.3122 +.0003	.0002	6	.0104
2	7519466	5.3750-12UN-3A W	5.3159	5.3750 +.0009	5.3520 -.0009	5.3159 +.0003	.0002	6	.0104
2	7519467	5.3750-16UN-2A W	5.3265	5.3732 +.0009	5.3536 -.0009	5.3265 +.0003	.00015	8	.0156
2	7519468	5.3750-16UN-3A W	5.3299	5.3750 +.0009	5.3570 -.0009	5.3299 +.0003	.00015	8	.0156
2	7519469	5.5000-4UN-2A W	5.3219	5.4964 +.0015	5.4302 -.0015	5.3219 +.0003	.0003	4	.0312
2	7519470	5.5000-4UN-3A W	5.3285	5.5000 +.0015	5.4368 -.0015	5.3285 +.0003	.0003	4	.0312
2	5220-749-8867	5.5000-12UN-2A W	5.4372	5.4980 +.0009	5.4733 -.0009	5.4372 +.0003	.0002	6	.0104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8868	5.5000-12UN-3A W	5.4409	5.5000 +.0009	5.4770 -.0009	5.4409 +.0003	.0002	6	.0104
2	5220-749-8870	5.5000-16UN-2A W	5.4515	5.4982 +.0009	5.4786 -.0009	5.4515 +.0003	.00015	8	.0078
2	5220-749-8871	5.5000-16UN-3A W	5.4549	5.5000 +.0009	5.4820 -.0009	5.4549 +.0003	.00015	8	.0078
2	7519471	5.6250-12UN-2A W	5.5619	5.6229 +.0009	5.5980 -.0009	5.5619 +.0003	.0002	6	.0104
2	7519472	5.6250-12UN-3A W	5.5657	5.6250 +.0009	5.6018 -.0009	5.5657 +.0003	.0002	6	.0104
2	7519473	5.6250-16UN-2A W	5.5763	5.6231 +.0009	5.6034 -.0009	5.5763 +.0003	.00015	8	.0078
2	7519474	5.6250-16UN-3A W	5.5797	5.6250 +.0009	5.6068 -.0009	5.5797 +.0003	.00015	8	.0078
2	7519475	5.7500-4UN-2A W	5.5717	5.7463 +.0015	5.6800 -.0015	5.5717 +.0003	.0003	4	.0312
2	7519476	5.7500-4UN-3A W	5.5784	5.7500 +.0015	5.6867 -.0015	5.5784 +.0003	.0003	4	.0312
2	5220-749-8875	5.7500-12UN-2A W	5.6869	5.7479 +.0009	5.7320 -.0009	5.6869 +.0003	.0002	6	.0104
2	5220-749-8876	5.7500-12UN-3A W	5.6907	5.7500 +.0009	5.7268 -.0009	5.6907 +.0003	.0002	6	.0104
2	5220-749-8878	5.7500-16UN-2A W	5.7013	5.7481 +.0009	5.7284 -.0009	5.7013 +.0003	.00015	8	.0078
2	5220-749-8879	5.7500-16UN-3A W	5.7047	5.7500 +.0009	5.7318 -.0009	5.7047 +.0003	.00015	8	.0078
2	7519477	5.8750-12UN-2A W	5.8119	5.8729 +.0009	5.8480 -.0009	5.8119 +.0003	.0002	6	.0104
2	7519478	5.8750-12UN-3A W	5.8157	5.8750 +.0009	5.8518 -.0009	5.8157 +.0003	.0002	6	.0104

ORDBA Form 20-1413, (OT) Rev 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table I. Tabulation of Design and Identification Data - Unified Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	7519479	5.8750-16UN-2A W	5.8263	5.8731 +.0009	5.8534 -.0009	5.8263 +.0003	.00015	8	.0078
2	7519480	5.8750-16UN-3A W	5.8297	5.8750 +.0009	5.8568 -.0009	5.8297 +.0003	.00015	8	.0078
2	7519481	6.0000-4UN-2A W	5.8215	5.9963 +.0015	5.9298 -.0015	5.8215 +.0003	.0003	4	.0312
2	7519482	6.0000-4UN-3A W	5.8283	6.0000 +.0015	5.9366 -.0015	5.8283 +.0003	.0003	4	.0312
2	5220-749-8883	6.0000-12UN-2A W	5.9369	5.9979 +.0009	5.9730 -.0009	5.9369 +.0003	.0002	6	.0104
2	5220-749-8884	6.0000-12UN-3A W	5.9407	6.0000 +.0009	5.9768 -.0009	5.9407 +.0003	.0002	6	.0104
2	5220-749-8886	6.0000-16UN-2A W	5.9513	5.9981 +.0009	5.9784 -.0009	5.9513 +.0003	.00015	8	.0078
2	5220-749-8887	6.0000-16UN-3A W	5.9547	6.0000 +.0009	5.9818 -.0009	5.9547 +.0003	.00015	8	.0078

ORDBA Form 20-1413, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread

FIG. NO.	MARKING ON GAGE HANDLE		LO PITCH DIA	TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION		MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8367	(0) .060-80UNF-3A-3 W	.0506	.0594 +.0003	.0560 -.0003	.0506 +.0001	.0001	20	.0016
1	5220-749-8370	(1) .073-64NC-3 W	.0615	.0729 +.0003	.0683 -.0003	.0615 +.0001	.0001	20	.0020
1	5220-749-8373	(1) .073-72NF-3 W	.0627	.0727 +.0003	.0687 -.0003	.0627 +.0001	.0001	20	.0017
1	5220-749-8376	(2) .086-56NC-3 W	.0729	.0860 +.0003	.0806 -.0003	.0729 +.0001	.0001	20	.0022
1	5220-749-8379	(2) .086-64NF-3 W	.0745	.0859 +.0003	.0813 -.0003	.0745 +.0001	.0001	20	.0020
1	5220-749-8382	(3) .099-48NC-3 W	.0839	.0990 +.0003	.0929 -.0003	.0839 +.0001	.0001	18	.0026
1	5220-749-8385	(3) .099-56NF-3 W	.0859	.0990 +.0003	.0936 -.0003	.0859 +.0001	.0001	20	.0022
1	5220-749-8388	(4) .112-40NC-3 W	.0941	.1120 +.0003	.1049 -.0003	.0941 +.0001	.0001	15	.0031
1	5220-749-8391	(4) .112-48NF-3 W	.0969	.1120 +.0003	.1059 -.0003	.0969 +.0001	.0001	18	.0026
1	5220-749-8394	(5) .125-40NC-3 W	.1071	.1250 +.0003	.1179 -.0003	.1071 +.0001	.0001	15	.0031
1	5220-749-8397	(5) .125-44NF-3 W	.1086	.1250 +.0003	.1184 -.0003	.1086 +.0001	.0001	15	.0028
1	5220-749-8400	(6) .138-32NC-3 W	.1158	.1380 +.0003	.1293 -.0003	.1158 +.0001	.0001	12	.0039
1	5220-749-8403	(6) .138-40NF-3 W	.1201	.1380 +.0003	.1309 -.0003	.1201 +.0001	.0001	15	.0031
1	5220-749-8406	(8) .164-32NC-3 W	.1418	.1640 +.0003	.1553 -.0003	.1418 +.0001	.0001	12	.0039
1	5220-749-8409	(8) .164-36NF-3 W	.1442	.1640 +.0003	.1562 -.0003	.1442 +.0001	.0001	12	.0035

ORDBA F .. 40 14 4 07 R 15 M 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8412	(10) .190-24NC-3 W	.1605	.1900 +.0005	.1785 -.0005	.1605 +.0001	.00015	8	.0052
1	5220-749-8415	(10) .190-32NF-3 W	.1678	.1900 +.0003	.1813 -.0003	.1678 +.0001	.0001	12	.0039
1	5220-749-8418	(12) .216-24NC-3 W	.1865	.2160 +.0005	.2045 -.0005	.1865 +.0001	.00015	8	.0052
1	5220-749-8421	(12) .216-28NF-3 W	.1906	.2160 +.0005	.2061 -.0005	.1906 +.0001	.00015	8	.0045
1	5220-751-6806	(12) .216-32NEF-3 W	.1935	.2160 +.0003	.2070 -.0003	.1935 +.0001	.0001	12	.0039
1	5220-749-8424	.2500-20NC-3 W	.2149	.2500 +.0005	.2366 -.0005	.2149 +.0001	.00015	8	.0062
1	5220-749-8427	.2500-28NF-3 W	.2246	.2500 +.0005	.2401 -.0005	.2246 +.0001	.00015	8	.0045
1	5220-749-8430	.2500-32NEF-3 W	.2275	.2500 +.0003	.2410 -.0003	.2275 +.0001	.0001	12	.0039
1	5220-749-8432	.3125-18UNC-3A-3 W	.2734	.3125 +.0005	.2975 -.0005	.2734 +.0001	.00015	8	.0069
1	5220-749-8435	.3125-24NF-3 W	.2830	.3125 +.0005	.3010 -.0005	.2830 +.0001	.00015	8	.0052
1	5220-749-8438	.3125-32NEF-3 W	.2899	.3125 +.0003	.3034 -.0003	.2899 +.0001	.0001	12	.0039
1	5220-749-8441	.3750-16NC-3 W	.3312	.3750 +.0006	.3583 -.0006	.3312 +.0001	.00015	8	.0078
1	5220-749-8444	.3750-24NF-3 W	.3455	.3750 +.0005	.3635 -.0005	.3455 +.0001	.00015	8	.0052
1	5220-749-8447	.3750-32NEF-3 W	.3523	.3750 +.0003	.3658 -.0003	.3523 +.0001	.0001	12	.0039
1	5220-749-8450	.4375-14NC-3 W	.3875	.4375 +.0006	.4184 -.0006	.38750+.00015	.0002	6	.0089

ORDBA F- = 40-1434, OI R- 15 Ma 62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8453	.4375-20NF-3 W	.4024	.4375 +.0005	.4241 -.0005	.4024 +.0001	.00015	8	.0062
1	5220-749-8456	.4375-28NEF-3 W	.4118	.4375 +.0005	.4273 -.0005	.4118 +.0001	.00015	8	.0045
1	5220-749-8457	.5000-12N-3 W	.4419	.5000 +.0006	.4780 -.0006	.44190 +.00015	.0002	6	.0104
1	5220-749-8459	.5000-13UNC-3A-3 W	.4463	.5000 +.0006	.4796 -.0006	.44630 +.00015	.0002	6	.0096
1	5220-749-8462	.5000-20NF-3 W	.4649	.5000 +.0005	.4866 -.0005	.4649 +.0001	.00015	8	.0062
1	5220-749-8465	.5000-28NEF-3 W	.4742	.5000 +.0005	.4897 -.0005	.4742 +.0001	.00015	8	.0045
1	5220-749-8468	.5625-12NC-3 W	.5044	.5625 +.0006	.5405 -.0006	.5044 +.0002	.0002	6	.0104
1	5220-749-8471	.5625-18NF-3 W	.5234	.5625 +.0005	.5475 -.0005	.52340 +.00015	.00015	8	.0069
1	5220-749-8474	.5625-24NEF-3 W	.5326	.5625 +.0005	.5506 -.0005	.53260 +.00015	.00015	8	.0052
1	5220-749-8477	.6250-11NC-3 W	.5618	.6250 +.0006	.6012 -.0006	.5618 +.0002	.0002	6	.0114
1	5220-749-8478	.6250-12N-3 W	.5669	.6250 +.0006	.6030 -.0006	.5669 +.0002	.0002	6	.0104
1	5220-749-8481	.6250-18NF-3 W	.5859	.6250 +.0005	.6100 -.0005	.58590 +.00015	.00015	8	.0069
1	5220-749-8484	.6250-24NEF-3 W	.5950	.6250 +.0005	.6130 -.0005	.59500 +.00015	.00015	8	.0052
1	5220-749-8485	.6875-12N-3 W	.6294	.6875 +.0006	.6655 -.0006	.6294 +.0002	.0002	6	.0104
1	5220-749-8488	.6875-24NEF-3 W	.6575	.6875 +.0005	.6755 -.0005	.65750 +.00015	.00015	8	.0052

ORDBA Form 20-1414, (OT) Re 15 Mar 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8491	.7500-10NC-3 W	.6805	.7500 +.0006	.7238 -.0006	.6805 +.0002	.00025	6	.0125
1	5220-749-8492	.7500-12N-3 W	.6919	.7500 +.0006	.7280 -.0006	.6919 +.0002	.0002	6	.0104
1	5220-749-8495	.7500-16NF-3 W	.7062	.7500 +.0006	.7333 -.0006	.7062 +.0002	.00015	8	.0078
1	5220-749-8498	.7500-20NEF-3 W	.7143	.7500 +.0005	.7360 -.0005	.71430 +.00015	.00015	8	.0062
1	5220-749-8499	.8125-12N-3 W	.7544	.8125 +.0006	.7905 -.0006	.7544 +.0002	.0002	6	.0104
1	5220-749-8500	.8125-16N-3 W	.7684	.8125 +.0006	.7955 -.0005	.7684 +.0002	.00015	8	.0078
1	5220-749-8503	.8125-20NEF-3 W	.7768	.8125 +.0005	.7985 -.0005	.77680 +.00015	.00015	8	.0062
1	5220-749-8506	.8750-9NC-3 W	.7979	.8750 +.0007	.8460 -.0007	.7979 +.0002	.00025	6	.0139
1	5220-749-8507	.8750-12N-3 W	.8169	.8750 +.0006	.8530 -.0006	.8169 +.0002	.0002	6	.0104
1	5220-749-8510	.8750-14NF-3 W	.8250	.8750 +.0006	.8559 -.0006	.8250 +.0002	.0002	6	.0089
1	5220-749-8511	.8750-16UN-3A-3 W	.8308	.8750 +.0006	.8579 -.0006	.8308 +.0002	.00015	8	.0078
1	5220-749-8513	.8750-20UNEF-3A-3 W	.8392	.8750 +.0005	.8609 -.0005	.83920 +.00015	.00015	8	.0062
1	5220-749-8514	.9375-12N-3 W	.8794	.9375 +.0006	.9155 -.0006	.8794 +.0002	.0002	6	.0104
1	5220-749-8515	.9375-16N-3 W	.8933	.9375 +.0006	.9204 -.0006	.8933 +.0002	.00015	8	.0078
1	5220-749-8518	.9375-20NEF-3 W	.9017	.9375 +.0005	.9234 -.0005	.90170 +.00015	.00015	8	.0062

ORDBA Form 20-1414, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8521	1.0000-8NC-3 W	.9134	1.0000 +.0007	.9675 -.0007	.9134 +.0002	.00025	5	.0156
1	5220-749-8524	1.0000-12N-3 W	.9419	1.0000 +.0006	.9780 -.0006	.9419 +.0002	.0002	6	.0104
1	5220-749-8528	1.0000-16UN-3A-3 W	.9557	1.0000 +.0006	.9828 -.0006	.9557 +.0002	.00015	8	.0078
1	5220-749-8530	1.0000-20UNEF-3A-3 W	.9641	1.0000 +.0005	.9858 -.0005	.96410 +.00015	.00015	8	.0062
1	5220-749-8533	1.0625-12N-3 W	1.0044	1.0625 +.0006	1.0405 -.0006	1.0044 +.0002	.0002	6	.0104
1	5220-749-8534	1.0625-16UN-3A-3 W	1.0182	1.0625 +.0006	1.0453 -.0006	1.0182 +.0002	.00015	8	.0078
1	5220-749-8536	1.0625-18UNEF-3A-3 W	1.0228	1.0625 +.0005	1.0469 -.0005	1.02280 +.00015	.00015	8	.0069
1	5220-749-8539	1.1250-7NC-3 W	1.0263	1.1250 +.0007	1.0882 -.0007	1.0263 +.0002	.0003	5	.0179
1	5220-749-8542	1.1250-8N-3 W	1.0383	1.1250 +.0007	1.0924 -.0007	1.0383 +.0002	.00025	5	.0156
1	5220-749-8545	1.1250-12NF-3 W	1.0669	1.1250 +.0006	1.1030 -.0006	1.0669 +.0002	.0002	6	.0104
1	5220-749-8546	1.1250-16N-3 W	1.0806	1.1250 +.0006	1.1077 -.0006	1.0806 +.0002	.00015	8	.0078
1	5220-749-8548	1.1250-18UNEF-3A-3 W	1.0853	1.1250 +.0005	1.1094 -.0005	1.08530 +.00015	.00015	8	.0069
1	5220-749-8551	1.1875-12N-3 W	1.1294	1.1875 +.0006	1.1655 -.0006	1.1294 +.0002	.0002	6	.0104
1	5220-749-8552	1.1875-16UN-3A-3 W	1.1431	1.1875 +.0006	1.1702 -.0006	1.1431 +.0002	.00015	8	.0078

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD /PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8554	1.1875-18UNEF-3A-3 W	1.1478	1.1875 +.0005	1.1719 -.0005	1.14780 +.00015	.00015	8	.0069
1	5220-749-8557	1.2500-7NC-3 W	1.1513	1.2500 +.0007	1.2132 -.0007	1.1513 +.0002	.0003	5	.0179
1	5220-749-8560	1.2500-8N-3 W	1.1630	1.2500 +.0007	1.2171 -.0007	1.1630 +.0002	.00025	5	.0156
1	5220-749-8563	1.2500-12NF-3 W	1.1919	1.2500 +.0006	1.2280 -.0006	1.1919 +.0002	.0002	6	.0104
1	5220-749-8564	1.2500-16UN-3A-3 W	1.2056	1.2500 +.0006	1.2327 -.0006	1.2056 +.0002	.00015	8	.0078
1	5220-749-8567	1.2500-18NEF-3 W	1.2102	1.2500 +.0005	1.2343 -.0005	1.21020 +.00015	.00015	8	.0069
1	5220-749-8570	1.3125-12N-3 W	1.2544	1.3125 +.0006	1.2905 -.0006	1.2544 +.0002	.0002	6	.0104
1	5220-749-8571	1.3125-16N-3 W	1.2680	1.3125 +.0006	1.2951 -.0006	1.2680 +.0002	.00015	8	.0078
1	5220-749-8574	1.3125-18NEF-3 W	1.2727	1.3125 +.0005	1.2968 -.0005	1.27270 +.00015	.00015	8	.0069
1	5220-749-8577	1.3750-6NC-3 W	1.2596	1.3750 +.0008	1.3318 -.0008	1.2596 +.0002	.0003	5	.0208
1	5220-749-8580	1.3750-8N-3 W	1.2877	1.3750 +.0007	1.3418 -.0007	1.2877 +.0002	.00025	5	.0156
1	5220-749-8583	1.3750-12NF-3 W	1.3169	1.3750 +.0006	1.3530 -.0006	1.3169 +.0002	.0002	6	.0104
1	5220-749-8584	1.3750-16N-3 W	1.3305	1.3750 +.0006	1.3576 -.0006	1.3305 +.0002	.00015	8	.0078
1	5220-749-8587	1.3750-18NEF-3 W	1.3351	1.3750 +.0005	1.3592 -.0005	1.33510 +.00015	.00015	8	.0069
1	5220-749-8590	1.4375-12N-3 W	1.3794	1.4375 +.0006	1.4155 -.0006	1.3794 +.0002	.0002	6	.0104

ORDBA Form 26-1434, (OT) Rev. 15 Mar 62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
1	5220-749-8591	1.4375-16N-3 W	1.3929	1.4375 +.0006	1.4200 -.0006	1.3929 +.0002	.00015	8	.0078
1	5220-749-8594	1.4375-18NEF-3 W	1.3976	1.4375 +.0005	1.4217 -.0005	1.39760 +.00015	.00015	8	.0069
1	5220-749-8597	1.5000-6NC-3 W	1.3846	1.5000 +.0008	1.4568 -.0008	1.3846 +.0002	.0003	5	.0208
1	5220-749-8600	1.5000-8N-3 W	1.4125	1.5000 +.0007	1.4666 -.0007	1.4125 +.0002	.00025	5	.0156
1	5220-749-8603	1.5000-12NF-3 W	1.4419	1.5000 +.0006	1.4780 -.0006	1.4419 +.0002	.0002	6	.0104
1	5220-749-8604	1.5000-16N-3 W	1.4554	1.5000 +.0006	1.4825 -.0006	1.4554 +.0002	.00015	8	.0078
1	5220-749-8607	1.5000-18NEF-3 W	1.4601	1.5000 +.0005	1.4842 -.0005	1.46010 +.00015	.00015	8	.0069
2	5220-749-8608	1.5625-16N-3 W	1.5179	1.5625 +.0006	1.5450 -.0006	1.51790 +.00025	.00015	8	.0078
2	5220-749-8611	1.5625-18NEF-3 W	1.5225	1.5625 +.0005	1.5466 -.0005	1.5225 +.0002	.00015	8	.0069
2	5220-749-8614	1.6250-8N-3 W	1.5373	1.6250 +.0007	1.5914 -.0007	1.53730 +.00025	.00025	5	.0156
2	5220-749-8617	1.6250-12N-3 W	1.5664	1.6250 +.0006	1.6025 -.0006	1.56640 +.00025	.0002	6	.0104
2	5220-749-8618	1.6250-16N-3 W	1.5803	1.6250 +.0006	1.6074 -.0006	1.58030 +.00025	.00015	8	.0078
2	5220-749-8621	1.6250-18NEF-3 W	1.5850	1.6250 +.0005	1.6091 -.0005	1.5850 +.0002	.00015	8	.0069
2	5220-749-8622	1.6875-16N-3 W	1.6428	1.6875 +.0006	1.6699 -.0006	1.64280 +.00025	.00015	8	.0078
2	5220-749-8625	1.6875-18NEF-3 W	1.6475	1.6875 +.0005	1.6716 -.0005	1.6475 +.0002	.00015	8	.0069

ORDBA Form 20-1434, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8628	1.7500-5NC-3 W	1.6119	1.7500 +.0008	1.6985 -.0008	1.61190 +.00025	.0003	4	.0250
2	5220-749-8631	1.7500-8N-3 W	1.6620	1.7500 +.0007	1.7161 -.0007	1.66200 +.00025	.00025	5	.0156
2	5220-749-8634	1.7500-12N-3 W	1.6913	1.7500 +.0006	1.7274 -.0006	1.69130 +.00025	.0002	6	.0104
2	5220-749-8637	1.7500-16NEF-3 W	1.7053	1.7500 +.0006	1.7324 -.0006	1.70530 +.00025	.00015	8	.0078
2	5220-749-8640	1.8125-16N-3 W	1.7677	1.8125 +.0006	1.7948 -.0006	1.76770 +.00025	.00025	8	.0078
2	5220-749-8643	1.8750-8N-3 W	1.7868	1.8750 +.0007	1.8409 -.0007	1.78680 +.00025	.00025	5	.0156
2	5220-749-8646	1.8750-12N-3 W	1.8163	1.8750 +.0006	1.8524 -.0006	1.81630 +.00025	.0002	6	.0104
2	5220-749-8649	1.8750-16N-3 W	1.8302	1.8750 +.0006	1.8573 -.0006	1.83020 +.00025	.00015	8	.0078
2	5220-749-8652	1.9375-16N-3 W	1.8927	1.9375 +.0006	1.9198 -.0006	1.89270 +.00025	.00015	8	.0078
2	5220-749-8655	2.0000-4-1/2NC-3 W	1.8468	2.0000 +.0008	1.9430 -.0008	1.84680 +.00025	.0003	4	.0278
2	5220-749-8658	2.0000-8N-3 W	1.9115	2.0000 +.0007	1.9656 -.0007	1.91150 +.00025	.00025	5	.0156
2	5220-749-8661	2.0000-12N-3 W	1.9412	2.0000 +.0006	1.9773 -.0006	1.94120 +.00025	.0002	6	.0104
2	5220-749-8664	2.0000-16NEF-3 W	1.9551	2.0000 +.0006	1.9822 -.0006	1.95510 +.00025	.00015	8	.0078
2	5220-749-8667	2.0625-16N-3 W	2.0176	2.0625 +.0006	2.0447 -.0006	2.01760 +.00025	.00015	8	.0078
2	5220-749-8670	2.1250-8N-3 W	2.0363	2.1250 +.0007	2.0904 -.0007	2.03630 +.00025	.00025	5	.0156

ORDBA Form 20-1414, (OT) Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8673	2.1250-12N-3 W	2.0661	2.1250 +.0006	2.1022 -.0006	2.06610 +.00025	.0002	6	.0104
2	5220-749-8676	2.1250-16N-3 W	2.0801	2.1250 +.0006	2.1072 -.0006	2.08010 +.00025	.00015	8	.0078
2	5220-749-8679	2.1875-16N-3 W	2.1426	2.1875 +.0006	2.1697 -.0006	2.14260 +.00025	.00015	8	.0078
2	5220-749-8682	2.2500-4½NC-3 W	2.0968	2.2500 +.0008	2.1930 -.0008	2.09680 +.00025	.0003	4	.0278
2	5220-749-8685	2.2500-8N-3 W	2.1611	2.2500 +.0007	2.2152 -.0007	2.16110 +.00025	.00025	5	.0156
2	5220-749-8688	2.2500-12N-3 W	2.1911	2.2500 +.0006	2.2272 -.0006	2.19110 +.00025	.0002	6	.0104
2	5220-749-8691	2.2500-16N-3 W	2.2050	2.2500 +.0006	2.2321 -.0006	2.20500 +.00025	.00015	8	.0078
2	5220-749-8694	2.3125-16N-3 W	2.2675	2.3125 +.0006	2.2946 -.0006	2.26750 +.00025	.00015	8	.0078
2	5220-749-8697	2.3750-12N-3 W	2.3160	2.3750 +.0006	2.3521 -.0006	2.31600 +.00025	.0002	6	.0104
2	5220-749-8700	2.3750-16N-3 W	2.3300	2.3750 +.0006	2.3571 -.0006	2.33000 +.00025	.00015	8	.0078
2	5220-749-8703	2.4375-16N-3 W	2.3924	2.4375 +.0006	2.4195 -.0006	2.39240 +.00025	.00015	8	.0078
2	5220-749-8706	2.5000-4NC-3 W	2.3279	2.5000 +.0009	2.4362 -.0009	2.32790 +.00025	.0003	4	.0312
2	5220-749-8709	2.5000-8N-3 W	2.4106	2.5000 +.0007	2.4647 -.0007	2.41060 +.00025	.00025	5	.0156
2	5220-749-8712	2.5000-12N-3 W	2.4410	2.5000 +.0006	2.4771 -.0006	2.44100 +.00025	.0002	6	.0104
2	5220-749-8715	2.5000-16N-3 W	2.4549	2.5000 +.0006	2.4820 -.0006	2.45490 +.00025	.00015	8	.0078

ORDBA Form 26-1434, Oct Rev 15 Mar 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8718	2.6250-12N-3 W	2.5659	2.6250 +.0006	2.6020 -.0006	2.56590 +.00025	.0002	6	.0104
2	5220-749-8721	2.6250-16N-3 W	2.5799	2.6250 +.0006	2.6070 -.0006	2.57990 +.00025	.00015	8	.0078
2	5220-749-8724	2.7500-4NC-3 W	2.5779	2.7500 +.0009	2.6862 -.0009	2.57790 +.00025	.0003	4	.0312
2	5220-749-8727	2.7500-8N-3 W	2.6601	2.7500 +.0007	2.7142 -.0007	2.66010 +.00025	.00025	5	.0156
2	5220-749-8730	2.7500-12N-3 W	2.6909	2.7500 +.0006	2.7270 -.0006	2.69090 +.00025	.0002	6	.0104
2	5220-749-8733	2.7500-16N-3 W	2.7048	2.7500 +.0006	2.7319 -.0006	2.70480 +.00025	.00015	8	.0078
2	5220-749-8736	2.8750-12N-3 W	2.8158	2.8750 +.0006	2.8519 -.0006	2.81580 +.00025	.0002	6	.0104
2	5220-749-8739	2.8750-16N-3 W	2.8298	2.8750 +.0006	2.8569 -.0006	2.82980 +.00025	.00015	8	.0078
2	5220-749-8742	3.0000-4NC-3 W	2.8279	3.0000 +.0009	2.9362 -.0009	2.82790 +.00025	.0003	4	.0312
2	5220-749-8745	3.0000-8N-3 W	2.9096	3.0000 +.0007	2.9637 -.0007	2.90960 +.00025	.00025	5	.0156
2	5220-749-8748	3.0000-12N-3 W	2.9408	3.0000 +.0006	2.9769 -.0006	2.94080 +.00025	.0002	6	.0104
2	5220-749-8751	3.0000-16N-3 W	2.9547	3.0000 +.0006	2.9818 -.0006	2.95470 +.00025	.00015	8	.0078
2	5220-749-8754	3.1250-12N-3 W	3.0657	3.1250 +.0006	3.1018 -.0006	3.06570 +.00025	.0002	6	.0104
2	5220-749-8757	3.1250-16N-3 W	3.0797	3.1250 +.0006	3.1068 -.0006	3.07970 +.00025	.00015	8	.0078
2	5220-749-8760	3.2500-4NC-3 W	3.0779	3.2500 +.0009	3.1862 -.0009	3.07790 +.00025	.0003	4	.0312

ORDBA F... 30-2474, 07, R- 15 Ma- 6...

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE		LO PITCH DIA	TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION		MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8763	3.2500-8N-3 W	3.1595	3.2500 +.0007	3.2136 -.0007	3.15950 +.00025	.00025	5	.0156
2	5220-749-8766	3.2500-12N-3 W	3.1907	3.2500 +.0006	3.2268 -.0006	3.19070 +.00025	.0002	6	.0104
2	5220-749-8769	3.2500-16N-3 W	3.2046	3.2500 +.0006	3.2317 -.0006	3.20460 +.00025	.00015	8	.0078
2	5220-749-8772	3.3750-12N-3 W	3.3156	3.3750 +.0006	3.3517 -.0006	3.31560 +.00025	.0002	6	.0104
2	5220-749-8775	3.3750-16N-3 W	3.3296	3.3750 +.0006	3.3567 -.0006	3.32960 +.00025	.00015	8	.0078
2	5220-749-8778	3.5000-4NC-3 W	3.3279	3.5000 +.0009	3.4362 -.0009	3.32790 +.00025	.0003	4	.0312
2	5220-749-8781	3.5000-8N-3 W	3.4095	3.5000 +.0007	3.4636 -.0007	3.40950 +.00025	.00025	5	.0156
2	5220-749-8784	3.5000-12N-3 W	3.4406	3.5000 +.0006	3.4767 -.0006	3.44060 +.00025	.0002	6	.0104
2	5220-749-8787	3.5000-16N-3 W	3.4545	3.5000 +.0006	3.4816 -.0006	3.45450 +.00025	.00015	8	.0078
2	5220-749-8790	3.6250-12N-3 W	3.5655	3.6250 +.0006	3.6016 -.0006	3.56550 +.00025	.0002	6	.0104
2	5220-749-8793	3.6250-16N-3 W	3.5795	3.6250 +.0006	3.6066 -.0006	3.57950 +.00025	.00025	8	.0078
2	5220-749-8796	3.7500-4NC-3 W	3.5779	3.7500 +.0009	3.6862 -.0009	3.57790 +.00025	.0003	4	.0312
2	5220-749-8799	3.7500-8N-3 W	3.6594	3.7500 +.0007	3.7135 -.0007	3.65940 +.00025	.00025	5	.0156
2	5220-749-8802	3.7500-12N-3 W	3.6905	3.7500 +.0006	3.7266 -.0006	3.69050 +.00025	.0002	6	.0104
2	5220-749-8805	3.7500-16N-3 W	3.7044	3.7500 +.0006	3.7315 -.0006	3.70440 +.00025	.00015	8	.0078

ORDBA F... 4... 24:4. 07. R- 15 Ma 6:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8808	3.8750-12N-3 W	3.8154	3.8750 +.0006	3.8515 -.0006	3.81540 +.00025	.0002	6	.0104
2	5220-749-8811	3.8750-16N-3 W	3.8294	3.8750 +.0006	3.8565 -.0006	3.82940 +.00025	.00015	8	.0078
2	5220-749-8814	4.0000-4NC-3 W	3.8279	4.0000 +.0009	3.9362 -.0009	3.82790 +.00025	.0003	4	.0312
2	5220-749-8817	4.0000-8N-3 W	3.9093	4.0000 +.0007	3.9634 -.0007	3.90930 +.00025	.00025	5	.0156
2	5220-749-8820	4.0000-12N-3 W	3.9404	4.0000 +.0006	3.9765 -.0006	3.94040 +.00025	.0002	6	.0104
2	5220-749-8823	4.0000-16N-3 W	3.9543	4.0000 +.0006	3.9814 -.0006	3.95430 +.00025	.00015	8	.0078
2	5220-749-8826	4.2500-8N-3 W	4.1592	4.2500 +.0011	4.2133 -.0011	4.1592 +.0003	.00025	5	.0156
2	5220-749-8829	4.2500-12N-3 W	4.1903	4.2500 +.0009	4.2264 -.0009	4.1903 +.0003	.0002	6	.0104
2	5220-751-6845	4.2500-16N-3 W	4.2042	4.2500 +.0009	4.2313 -.0009	4.2042 +.0003	.00015	8	.0078
2	5220-749-8834	4.5000-8N-3 W	4.4091	4.5000 +.0011	4.4632 -.0011	4.4091 +.0003	.00025	5	.0156
2	5220-749-8837	4.5000-12N-3 W	4.4402	4.5000 +.0009	4.4763 -.0009	4.4402 +.0003	.0002	6	.0104
2	5220-751-6846	4.5000-16N-3 W	4.4541	4.5000 +.0009	4.4812 -.0009	4.4541 +.0003	.00015	8	.0078
2	5220-749-8842	4.7500-8N-3 W	4.6590	4.7500 +.0011	4.7131 -.0011	4.6590 +.0003	.00025	5	.0156
2	5220-749-8845	4.7500-12N-3 W	4.6901	4.7500 +.0009	4.7262 -.0009	4.6901 +.0003	.0002	6	.0104
2	5220-751-6847	4.7500-16N-3 W	4.7041	4.7500 +.0009	4.7312 -.0009	4.7041 +.0003	.00015	8	.0078

ORDBA Form 20-1434, Oct 58 Rev 15 May 61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table II. Tabulation of Design and Identification Data - American National Standard Thread (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-749-8850	5.0000-8N-3 W	4.9089	5.0000 +.0011	4.9630 -.0011	4.9089 +.0003	.00025	5	.0156
2	5220-749-8853	5.0000-12N-3 W	4.9400	5.0000 +.0009	4.9761 -.0009	4.9400 +.0003	.0002	6	.0104
2	5220-751-6848	5.0000-16N-3 W	4.9540	5.0000 +.0009	4.9811 -.0009	4.9540 +.0003	.00015	8	.0078
2	5220-749-8858	5.2500-8N-3 W	5.1589	5.2500 +.0011	5.2130 -.0011	5.1589 +.0003	.00025	5	.0156
2	5220-749-8861	5.2500-12N-3 W	5.1900	5.2500 +.0009	5.2261 -.0009	5.1900 +.0003	.0002	6	.0104
2	5220-751-6849	5.2500-16N-3 W	5.2039	5.2500 +.0009	5.2310 -.0009	5.2039 +.0003	.00015	8	.0078
2	5220-749-8866	5.5000-8N-3 W	5.4088	5.5000 +.0011	5.4629 -.0011	5.4088 +.0003	.00025	5	.0156
2	5220-749-8869	5.5000-12N-3 W	5.4399	5.5000 +.0009	5.4760 -.0009	5.4399 +.0003	.0002	6	.0104
2	5220-751-6850	5.5000-16N-3 W	5.4538	5.5000 +.0009	5.4809 -.0009	5.4538 +.0003	.00015	8	.0078
2	5220-749-8874	5.7500-8N-3 W	5.6587	5.7500 +.0011	5.7128 -.0011	5.6587 +.0003	.00025	5	.0156
2	5220-749-8877	5.7500-12N-3 W	5.6898	5.7500 +.0009	5.7259 -.0009	5.6898 +.0003	.0002	6	.0104
2	5220-751-6851	5.7500-16N-3 W	5.7038	5.7500 +.0009	5.7309 -.0009	5.7038 +.0003	.00015	8	.0078
2	5220-749-8882	6.0000-8N-3 W	5.9086	6.0000 +.0011	5.9627 -.0011	5.9086 +.0003	.00025	5	.0156
2	5220-749-8885	6.0000-12N-3 W	5.9397	6.0000 +.0009	5.9758 -.0009	5.9397 +.0003	.0002	6	.0104
2	5220-751-6852	6.0000-16N-3 W	5.9537	6.0000 +.0009	5.9808 -.0009	5.9537 +.0003	.00015	8	.0078

ORDBA Fo m 20-1434, OT; R- 15 Ma o

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table III. Tabulation of Design and Identification Data - Special (UNS) Threads

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
2	5220-751-6807	.5000-12UNS-2A W (.5000-12N-2A W)*	.4389	.4984 + .0006	.4750 - .0006	.43890 + .00015	.0002	6	.0104
2	5220-749-8457	.5000-12UNS-3A W (.5000-12N-3A-3 W)*	.4419	.5000 + .0006	.4780 - .0006	.44190 + .00015	.0002	6	.0104
2	5220-749-8525	1.0000-14UNS-2A W (1.0000-14NF-2A W)*	.9463	.9983 + .0006	.9772 - .0006	.9463 + .0002	.0002	6	.0089
2	5220-749-8526	1.0000-14UNS-3A W (1.0000-14NF-3A W)*	.9494	1.0000 + .0006	.9803 - .0006	.9494 + .0002	.0002	6	.0089
2	5220-749-8527	1.0000-14NS-3 W (1.0000-14NF-3 W)*	.9500	1.0000 + .0006	.9809 - .0006	.9500 + .0002	.0002	6	.0089
3	5220-749-8665	2.0625-16UNS-2A W (2.0625-16N-2A W)*	2.0149	2.0609 + .0006	2.0420 - .0006	2.01490 + .00025	.00015	8	.0078
3	5220-749-8666	2.0625-16UNS-3A W (2.0625-16N-3A W)*	2.0179	2.0625 + .0006	2.0450 - .0006	2.01790 + .00025	.00015	8	.0078
3	5220-749-8677	2.1875-16UNS-2A W (2.1875-16N-2A W)*	2.1399	2.1859 + .0006	2.1670 - .0006	2.13990 + .00025	.00015	8	.0078
3	5220-749-8678	2.1875-16UNS-3A W (2.1875-16N-3A W)*	2.1429	2.1875 + .0006	2.1700 - .0006	2.14290 + .00025	.00015	8	.0078
3	5220-749-8692	2.3125-16UNS-2A W (2.3125-16N-2A W)*	2.2647	2.3108 + .0006	2.2918 - .0006	2.26470 + .00025	.00015	8	.0078
3	5220-749-8693	2.3125-16UNS-3A W (2.3125-16N-3A W)*	2.2678	2.3125 + .0006	2.2949 - .0006	2.26780 + .00025	.00015	8	.0078
3	5220-749-8701	2.4375-16UNS-2A W (2.4375-16N-2A W)*	2.3897	2.4358 + .0006	2.4168 - .0006	2.38970 + .00025	.00015	8	.0078
3	5220-749-8702	2.4375-16UNS-3A W (2.4375-16N-3A W)*	2.3928	2.4375 + .0006	2.4199 - .0006	2.39280 + .00025	.00015	8	.0078
3	5220-749-8824	4.2500-8UN-2A W (4.2500-8N-2A W)*	4.1567	2.2472 + .0011	4.2108 - .0011	4.1567 + .0003	.00025	5	.0156
3	5220-749-8825	4.2500-8UN-3A W (4.2500-8N-3A W)*	4.1618	4.2500 + .0011	4.2159 - .0011	4.1618 + .0003	.00025	5	.0156

* Thread designation as previously listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table III. Tabulation of Design and Identification Data - Special (UNS) Threads (Continued)

FIG. NO.	MARKING ON GAGE HANDLE			TRUNCATED THREAD SETTING PLUG GAGE DIMENSIONS					
	MIL-STD PART NUMBER	THREAD DESIGNATION	LO PITCH DIA	MAJOR DIA FULL PORTION	MAJOR DIA TRUNCATED PORTION	PITCH DIAMETER	TOL ON LEAD	HALF ANGLE TOL	ROOT CLEAR
A	B	C	D	E	F	G	H	J	K
3	5220-749-8832	4.5000-8UN-2A W (4.5000-8N-2A W)*	4.4066	4.4972 + .0011	4.4607 - .0011	4.4066 + .0003	.00025	5	.0156
3	5220-749-8833	4.5000-8UN-3A W (4.5000-8N-3A W)*	4.4117	4.5000 + .0011	4.4658 - .0011	4.4117 + .0003	.00025	5	.0156
3	5220-749-8840	4.7500-8UN-2A W (4.7500-8N-2A W)*	4.6564	4.7471 + .0011	4.7105 - .0011	4.6564 + .0003	.00025	5	.0156
3	5220-749-8841	4.7500-8UN-3A W (4.7500-8N-3A W)*	4.6616	4.7500 + .0011	4.7157 - .0011	4.6616 + .0003	.00025	5	.0156
3	5220-749-8848	5.0000-8UN-2A W (5.0000-8N-2A W)*	4.9062	4.9971 + .0011	4.9603 - .0011	4.9062 + .0003	.00025	5	.0156
3	5220-749-8849	5.0000-8UN-3A W (5.0000-8N-3A W)*	4.9116	5.0000 + .0011	4.9657 - .0011	4.9116 + .0003	.00025	5	.0156
3	5220-749-8856	5.2500-8UN-2A W (5.2500-8N-2A W)*	5.1561	5.2471 + .0011	5.2102 - .0011	5.1561 + .0003	.00025	5	.0156
3	5220-749-8857	5.2500-8UN-3A W (5.2500-8N-3A W)*	5.1615	5.2500 + .0011	5.2156 - .0011	5.1615 + .0003	.00025	5	.0156
3	5220-749-8864	5.5000-8UN-2A W (5.5000-8N-2A W)*	5.4059	5.4970 + .0011	5.4600 - .0011	5.4059 + .0003	.00025	5	.0156
3	5220-749-8865	5.5000-8UN-3A W (5.5000-8N-3A W)*	5.4114	5.5000 + .0011	5.4655 - .0011	5.4114 + .0003	.00025	5	.0156
3	5220-749-8872	5.7500-8UN-2A W (5.7500-8N-2A W)*	5.6558	5.7470 + .0011	5.7099 - .0011	5.6558 + .0003	.00025	5	.0156
3	5220-749-8873	5.7500-8UN-3A W (5.7500-8N-3A W)*	5.6613	5.7500 + .0011	5.7154 - .0011	5.6613 + .0003	.00025	5	.0156
3	5220-749-8880	6.0000-8UN-2A W (6.0000-8N-2A W)*	5.9056	5.9970 + .0011	5.9597 - .0011	5.9056 + .0003	.00025	5	.0156
3	5220-749-8881	6.0000-8UN-3A W (6.0000-8N-3A W)*	5.9112	6.0000 + .0011	5.9653 - .0011	5.9112 + .0003	.00025	5	.0156

Note: The length of engagement for 8UN thread series is equal to the nominal diameter.

* Thread designation as previously listed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-749-8366	7	5220-749-8394	51	5220-749-8422	9	5220-749-8450	52	5220-749-8478	53
5220-749-8367	7,51	5220-749-8395	8	5220-749-8423	9	5220-749-8451	11	5220-749-8479	14
5220-749-8368	7	5220-749-8396	8	5220-749-8424	52	5220-749-8452	11	5220-749-8480	14
5220-749-8369	7	5220-749-8397	51	5220-749-8425	9	5220-749-8453	53	5220-749-8481	53
5220-749-8370	51	5220-749-8398	8	5220-749-8426	9	5220-749-8454	11	5220-749-8482	14
5220-749-8371	7	5220-749-8399	8	5220-749-8427	52	5220-749-8455	11	5220-749-8483	14
5220-749-8372	7	5220-749-8400	51	5220-749-8428	9	5220-749-8456	53	5220-749-8484	53
5220-749-8373	51	5220-749-8401	8	5220-749-8429	10	5220-749-8457	53,65	5220-749-8485	53
5220-749-8374	7	5220-749-8402	8	5220-749-8430	52	5220-749-8458	12	5220-749-8486	15
5220-749-8375	7	5220-749-8403	51	5220-749-8431	10	5220-749-8459	12,53	5220-749-8487	15
5220-749-8376	51	5220-749-8404	8	5220-749-8432	10,52	5220-749-8460	12	5220-749-8488	53
5220-749-8377	7	5220-749-8405	8	5220-749-8433	10	5220-749-8461	12	5220-749-8489	15
5220-749-8378	7	5220-749-8406	51	5220-749-8434	10	5220-749-8462	53	5220-749-8490	15
5220-749-8379	51	5220-749-8407	8	5220-749-8435	52	5220-749-8463	12	5220-749-8491	54
5220-749-8380	7	5220-749-8408	8	5220-749-8436	10	5220-749-8464	12	5220-749-8492	54
5220-749-8381	7	5220-749-8409	51	5220-749-8437	10	5220-749-8465	53	5220-749-8493	15
5220-749-8382	51	5220-749-8410	9	5220-749-8438	52	5220-749-8466	12	5220-749-8494	15
5220-749-8383	7	5220-749-8411	9	5220-749-8439	10	5220-749-8467	12	5220-749-8495	54
5220-749-8384	7	5220-749-8412	52	5220-749-8440	10	5220-749-8468	53	5220-749-8496	15
5220-749-8385	51	5220-749-8413	9	5220-749-8441	52	5220-749-8469	13	5220-749-8497	16
5220-749-8386	7	5220-749-8414	9	5220-749-8442	11	5220-749-8470	13	5220-749-8498	54
5220-749-8387	8	5220-749-8415	52	5220-749-8443	11	5220-749-8471	53	5220-749-8499	54
5220-749-8388	51	5220-749-8416	9	5220-749-8444	52	5220-749-8472	13	5220-749-8500	54
5220-749-8389	8	5220-749-8417	9	5220-749-8445	11	5220-749-8473	13	5220-749-8501	16
5220-749-8390	8	5220-749-8418	52	5220-749-8446	11	5220-749-8474	53	5220-749-8502	16
5220-749-8391	51	5220-749-8419	9	5220-749-8447	52	5220-749-8475	13	5220-749-8503	54
5220-749-8392	8	5220-749-8420	9	5220-749-8448	11	5220-749-8476	13	5220-749-8504	17
5220-749-8393	8	5220-749-8421	52	5220-749-8449	11	5220-749-8477	53	5220-749-8505	17

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

ORDER F

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-749-8506	54	5220-749-8534	19,55	5220-749-8562	22	5220-749-8590	56	5220-749-8618	57
5220-749-8507	54	5220-749-8535	19	5220-749-8563	56	5220-749-8591	57	5220-749-8619	27
5220-749-8508	17	5220-749-8536	19,55	5220-749-8564	22,56	5220-749-8592	25	5220-749-8620	27
5220-749-8509	17	5220-749-8537	20	5220-749-8565	22	5220-749-8593	25	5220-749-8621	57
5220-749-8510	54	5220-749-8538	20	5220-749-8566	22	5220-749-8594	57	5220-749-8622	57
5220-749-8511	17,54	5220-749-8539	55	5220-749-8567	56	5220-749-8595	25	5220-749-8623	28
5220-749-8512	17	5220-749-8540	20	5220-749-8568	23	5220-749-8596	25	5220-749-8624	28
5220-749-8513	17,54	5220-749-8541	20	5220-749-8569	23	5220-749-8597	57	5220-749-8625	57
5220-749-8514	54	5220-749-8542	55	5220-749-8570	56	5220-749-8598	25	5220-749-8626	28
5220-749-8515	54	5220-749-8543	20	5220-749-8571	56	5220-749-8599	25	5220-749-8627	28
5220-749-8516	18	5220-749-8544	20	5220-749-8572	23	5220-749-8600	57	5220-749-8628	58
5220-749-8517	18	5220-749-8545	55	5220-749-8573	23	5220-749-8601	25	5220-749-8629	29
5220-749-8518	54	5220-749-8546	55	5220-749-8574	56	5220-749-8602	25	5220-749-8630	29
5220-749-8519	18	5220-749-8547	20	5220-749-8575	23	5220-749-8603	57	5220-749-8631	58
5220-749-8520	18	5220-749-8548	20,55	5220-749-8576	23	5220-749-8604	57	5220-749-8632	29
5220-749-8521	55	5220-749-8549	21	5220-749-8577	56	5220-749-8605	26	5220-749-8633	29
5220-749-8522	18	5220-749-8550	21	5220-749-8578	23	5220-749-8606	26	5220-749-8634	58
5220-749-8523	18	5220-749-8551	55	5220-749-8579	23	5220-749-8607	57	5220-749-8635	29
5220-749-8524	55	5220-749-8552	21,55	5220-749-8580	56	5220-749-8608	57	5220-749-8636	29
5220-749-8525	65	5220-749-8553	21	5220-749-8581	23	5220-749-8609	27	5220-749-8637	58
5220-749-8526	65	5220-749-8554	21,56	5220-749-8582	24	5220-749-8610	27	5220-749-8638	30
5220-749-8527	65	5220-749-8555	21	5220-749-8583	56	5220-749-8611	57	5220-749-8639	30
5220-749-8528	18,55	5220-749-8556	22	5220-749-8584	56	5220-749-8612	27	5220-749-8640	58
5220-749-8529	19	5220-749-8557	56	5220-749-8585	24	5220-749-8613	27	5220-749-8641	30
5220-749-8530	19,55	5220-749-8558	22	5220-749-8586	24	5220-749-8614	57	5220-749-8642	30
5220-749-8531	19	5220-749-8559	22	5220-749-8587	56	5220-749-8615	27	5220-749-8643	58
5220-749-8532	19	5220-749-8560	56	5220-749-8588	24	5220-749-8616	27	5220-749-8644	30
5220-749-8533	55	5220-749-8561	22	5220-749-8589	24	5220-749-8617	57	5220-749-8645	30

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

ORDBA Fo

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-749-8646	58	5220-749-8674	32	5220-749-8702	65	5220-749-8730	60	5220-749-8758	38
5220-749-8647	30	5220-749-8675	32	5220-749-8703	59	5220-749-8731	36	5220-749-8759	38
5220-749-8648	30	5220-749-8676	59	5220-749-8704	34	5220-749-8732	36	5220-749-8760	60
5220-749-8649	58	5220-749-8677	65	5220-749-8705	34	5220-749-8733	60	5220-749-8761	39
5220-749-8650	31	5220-749-8678	65	5220-749-8706	59	5220-749-8734	37	5220-749-8762	39
5220-749-8651	31	5220-749-8679	59	5220-749-8707	34	5220-749-8735	37	5220-749-8763	61
5220-749-8652	58	5220-749-8680	33	5220-749-8708	34	5220-749-8736	60	5220-749-8764	39
5220-749-8653	31	5220-749-8681	33	5220-749-8709	59	5220-749-8737	37	5220-749-8765	39
5220-749-8654	31	5220-749-8682	59	5220-749-8710	35	5220-749-8738	37	5220-749-8766	61
5220-749-8655	58	5220-749-8683	33	5220-749-8711	35	5220-749-8739	60	5220-749-8767	39
5220-749-8656	31	5220-749-8684	33	5220-749-8712	59	5220-749-8740	37	5220-749-8768	39
5220-749-8657	32	5220-749-8685	59	5220-749-8713	35	5220-749-8741	37	5220-749-8769	61
5220-749-8658	58	5220-749-8686	33	5220-749-8714	35	5220-749-8742	60	5220-749-8770	39
5220-749-8659	32	5220-749-8687	33	5220-749-8715	59	5220-749-8743	37	5220-749-8771	39
5220-749-8660	32	5220-749-8688	59	5220-749-8716	35	5220-749-8744	37	5220-749-8772	61
5220-749-8661	58	5220-749-8689	33	5220-749-8717	35	5220-749-8745	60	5220-749-8773	39
5220-749-8662	32	5220-749-8690	33	5220-749-8718	60	5220-749-8746	37	5220-749-8774	40
5220-749-8663	32	5220-749-8691	59	5220-749-8719	35	5220-749-8747	38	5220-749-8775	61
5220-749-8664	58	5220-749-8692	65	5220-749-8720	35	5220-749-8748	60	5220-749-8776	40
5220-749-8665	65	5220-749-8693	65	5220-749-8721	60	5220-749-8749	38	5220-749-8777	40
5220-749-8666	65	5220-749-8694	59	5220-749-8722	36	5220-749-8750	38	5220-749-8778	61
5220-749-8667	58	5220-749-8695	34	5220-749-8723	36	5220-749-8751	60	5220-749-8779	40
5220-749-8668	32	5220-749-8696	34	5220-749-8724	60	5220-749-8752	38	5220-749-8780	40
5220-749-8669	32	5220-749-8697	59	5220-749-8725	36	5220-749-8753	38	5220-749-8781	61
5220-749-8670	58	5220-749-8698	34	5220-749-8726	36	5220-749-8754	60	5220-749-8782	40
5220-749-8671	32	5220-749-8699	34	5220-749-8727	60	5220-749-8755	38	5220-749-8783	40
5220-749-8672	32	5220-749-8700	59	5220-749-8728	36	5220-749-8756	38	5220-749-8784	61
5220-749-8673	59	5220-749-8701	65	5220-749-8729	36	5220-749-8757	60	5220-749-8785	40

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

ORDBA Fo

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-749-8786	40	5220-749-8814	62	5220-749-8842	62	5220-749-8870	48	5220-751-6814	16
5220-749-8787	61	5220-749-8815	42	5220-749-8843	45	5220-749-8871	48	5220-751-6815	16
5220-749-8788	41	5220-749-8816	42	5220-749-8844	45	5220-749-8872	66	5220-751-6816	16
5220-749-8789	41	5220-749-8817	62	5220-749-8845	62	5220-749-8873	66	5220-751-6817	16
5220-749-8790	61	5220-749-8818	42	5220-749-8846	45	5220-749-8874	63	5220-751-6818	17
5220-749-8791	41	5220-749-8819	42	5220-749-8847	45	5220-749-8875	48	5220-751-6819	17
5220-749-8792	41	5220-749-8820	62	5220-749-8848	66	5220-749-8876	48	5220-751-6820	17
5220-749-8793	61	5220-749-8821	43	5220-749-8849	66	5220-749-8877	63	5220-751-6821	17
5220-749-8794	41	5220-749-8822	43	5220-749-8850	63	5220-749-8878	48	5220-751-6822	18
5220-749-8795	41	5220-749-8823	62	5220-749-8851	46	5220-749-8879	48	5220-751-6823	18
5220-749-8796	61	5220-749-8824	65	5220-749-8852	46	5220-749-8880	66	5220-751-6824	18
5220-749-8797	41	5220-749-8825	65	5220-749-8853	63	5220-749-8881	66	5220-751-6825	18
5220-749-8798	41	5220-749-8826	62	5220-749-8854	46	5220-749-8882	63	5220-751-6826	19
5220-749-8799	61	5220-749-8827	43	5220-749-8855	46	5220-749-8883	49	5220-751-6827	20
5220-749-8800	41	5220-749-8828	43	5220-749-8856	66	5220-749-8884	49	5220-751-6828	20
5220-749-8801	41	5220-749-8829	62	5220-749-8857	66	5220-749-8885	63	5220-751-6829	21
5220-749-8802	61	5220-749-8830	43	5220-749-8858	63	5220-749-8886	49	5220-751-6830	22
5220-749-8803	41	5220-749-8831	44	5220-749-8859	47	5220-749-8887	49	5220-751-6831	23
5220-749-8804	41	5220-749-8832	66	5220-749-8860	47	5220-751-6804	9	5220-751-6832	23
5220-749-8805	61	5220-749-8833	66	5220-749-8861	63	5220-751-6805	9	5220-751-6833	24
5220-749-8806	42	5220-749-8834	62	5220-749-8862	47	5220-751-6806	52	5220-751-6834	24
5220-749-8807	42	5220-749-8835	44	5220-749-8863	47	5220-751-6807	65	5220-751-6835	25
5220-749-8808	62	5220-749-8836	44	5220-749-8864	66	5220-751-6808	13	5220-751-6836	25
5220-749-8809	42	5220-749-8837	62	5220-749-8865	66	5220-751-6809	13	5220-751-6837	25
5220-749-8810	42	5220-749-8838	44	5220-749-8866	63	5220-751-6810	14	5220-751-6838	26
5220-749-8811	62	5220-749-8839	44	5220-749-8867	47	5220-751-6811	14	5220-751-6839	26
5220-749-8812	42	5220-749-8840	66	5220-749-8868	48	5220-751-6812	15	5220-751-6840	26
5220-749-8813	42	5220-749-8841	66	5220-749-8869	63	5220-751-6813	15	5220-751-6841	21

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

ORDBA Form

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
5220-751-6842	27	7519224	12	7519252	16	7519280	21	7519308	26
5220-751-6843	28	7519225	13	7519253	16	7519281	21	7519309	26
5220-751-6844	28	7519226	13	7519254	16	7519282	21	7519310	26
5220-751-6845	62	7519227	13	7519255	17	7519283	22	7519311	26
5220-751-6846	62	7519228	13	7519256	17	7519284	22	7519312	26
5220-751-6847	62	7519229	13	7519257	17	7519285	22	7519313	26
5220-751-6848	63	7519230	13	7519258	17	7519286	22	7519314	26
5220-751-6849	63	7519231	13	7519259	18	7519287	22	7519315	27
5220-751-6850	63	7519232	14	7519260	18	7519288	22	7519316	27
5220-751-6851	63	7519233	14	7519261	18	7519289	23	7519317	27
5220-751-6852	63	7519234	14	7519262	18	7519290	23	7519318	27
7519207	10	7519235	14	7519263	19	7519291	23	7519319	27
7519208	10	7519236	14	7519264	19	7519292	23	7519320	28
7519209	10	7519237	14	7519265	19	7519293	24	7519321	28
7519210	10	7519238	14	7519266	19	7519294	24	7519322	28
7519211	10	7519239	14	7519267	19	7519295	24	7519323	28
7519212	10	7519240	14	7519268	19	7519296	24	7519324	28
7519213	11	7519241	15	7519269	19	7519297	24	7519325	28
7519214	11	7519242	15	7519270	20	7519298	24	7519326	28
7519215	11	7519243	15	7519271	20	7519299	24	7519327	28
7519216	11	7519244	15	7519272	20	7519300	24	7519328	28
7519217	11	7519245	15	7519273	20	7519301	25	7519329	29
7519218	12	7519246	15	7519274	20	7519302	25	7519330	29
7519219	12	7519247	16	7519275	21	7519303	25	7519331	29
7519220	12	7519248	16	7519276	21	7519304	25	7519332	29
7519221	12	7519249	16	7519277	21	7519305	26	7519333	29
7519222	12	7519250	16	7519278	21	7519306	26	7519334	29
7519223	12	7519251	16	7519279	21	7519307	26	7519335	29

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

ORDBA Form 20

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7519336	29	7519364	33	7519392	37	7519420	43	7519448	45
7519337	29	7519365	33	7519393	38	7519421	43	7519449	45
7519338	30	7519366	34	7519394	38	7519422	43	7519450	46
7519339	30	7519367	34	7519395	38	7519423	43	7519451	46
7519340	30	7519368	34	7519396	38	7519424	43	7519452	46
7519341	30	7519369	34	7519397	38	7519425	43	7519453	46
7519342	30	7519370	34	7519398	38	7519426	43	7519454	46
7519343	30	7519371	34	7519399	39	7519427	43	7519455	46
7519344	30	7519372	34	7519400	39	7519428	43	7519456	46
7519345	31	7519373	35	7519401	39	7519429	44	7519457	46
7519346	31	7519374	35	7519402	39	7519430	44	7519458	46
7519347	31	7519375	35	7519403	39	7519431	44	7519459	46
7519348	31	7519376	35	7519404	39	7519432	44	7519460	46
7519349	31	7519377	35	7519405	40	7519433	44	7519461	47
7519350	31	7519378	35	7519406	40	7519434	44	7519462	47
7519351	31	7519379	35	7519407	40	7519435	44	7519463	47
7519352	31	7519380	36	7519408	40	7519436	44	7519464	47
7519353	31	7519381	36	7519409	40	7519437	44	7519465	47
7519354	31	7519382	36	7519410	40	7519438	44	7519466	47
7519355	32	7519383	36	7519411	41	7519439	45	7519467	47
7519356	32	7519384	36	7519412	41	7519440	45	7519468	47
7519357	32	7519385	36	7519413	41	7519441	45	7519469	47
7519358	32	7519386	36	7519414	42	7519442	45	7519470	47
7519359	33	7519387	37	7519415	42	7519443	45	7519471	48
7519360	33	7519388	37	7519416	42	7519444	45	7519472	48
7519361	33	7519389	37	7519417	42	7519445	45	7519473	48
7519362	33	7519390	37	7519418	42	7519446	45	7519474	48
7519363	33	7519391	37	7519419	43	7519447	45	7519475	48

* Applicable page number in table I, II or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

ORDB

Table IV. Listing of Mil-Std Part Numbers in Numerical Sequence (Continued)

MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*	MIL-STD PART NUMBER	PAGE NO.*
A	B	A	B	A	B	A	B	A	B
7519476	48								
7519477	48								
7519478	48								
7519479	49								
7519480	49								
7519481	49								
7519482	49								

* Applicable page number in table I, II, or III for design and identification data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

Notice: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

Copies of this standard for military use may be obtained as indicated in the foreword to the DOD Index of Military Specifications and Standards.

Copies of this standard may be obtained for other than official use by individuals, firms, and contractors from the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

Both the title and the identifying symbol number should be stipulated when requesting copies of military standards.

Custodians:
Army - MU
Navy - WEPS
Air Force - MAA

Preparing Activity
Army - MU

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.