INCH-POUND
A-A-52193B
September 25, 2001
SUPERSEDING
A-A-52193A
October 23, 1995

COMMERCIAL ITEM DESCRIPTION

FOOD CONTAINER, INSULATED, WITH INSERTS

The General Services Administration has authorized the use of this commercial item description in preference to MIL-F-10870 for all federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description (CID) covers plastic insulated food containers with removable insert pans having covers and gaskets for the transportation of hot or cold foods and liquids without spillage (see 6.1).

1.2. Classification. The food containers shall be of the following sizes and classes (see 6.3):

Size 1 - To contain 6-inch deep pans (see 2.1)
Size 2 - To contain 4-inch deep pans (see 2.1)
Size 3 - To contain 6-inch deep pans (see 2.1)

Class 1 - Brown (Desert Sand)
Class 2 - Green (Olive)
Class 3 - Commercial color selection (see 2.7 and 6.3)

1.3 CID based part identification number (PIN). A document based PIN to identify sizes and classes is included in section 6. This part identification number procedure is for government purposes and does not constitute a requirement for the contractor (see 6.6).

2. SALIENT CHARACTERISTICS

2.1 Design. The insulated food container shall consist of a sealed insulated plastic body and lid with a removable gasket. Lids shall be interchangeable between sizes. The interior of the food container shall include three one third size stainless steel steam table pans with covers and gaskets (insert pans). The exterior of the food container shall have an integral molded hand grasp handle which is continuous around the outside edge, and a minimum of four, over-the-center, plastic, lid locking latches. The food containers shall have the following maximum outside dimensions:

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Philadelphia (DSCP), ATTN: DSCP-HSL, 700 Robbins Avenue, Philadelphia, PA 19111-5096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

Size	Width (inches)	Length (inches)	Height (inches)
1	17 3/8	24 3/4	10 1/8
2	17 3/8	24 3/4	8 1/8
3	17 3/8	24 3/4	12

The food containers shall be stackable with an indentation in each outside corner of the lid to accommodate matching pads on the bottom of each container body. The stackability interface shall be dimensionally the same for each size container. Containers shall be stackable when sizes are mixed in the same stack.

2.1.2 Body. The insulated container body shall consist of an inner and outer shell made of high density plastic, which is Food and Drug Administration (FDA) food grade approved, and insulated to comply with the temperature performance specified in 2.2. The interior sha11 accommodate three one third size steam table pans, 6 inches deep for sizes 1 and 3. Size 2 shall accommodate three one third size steam table pans, 4 inches deep. The size 1 container interior shall accommodate three stacked tray pack cans (see figure 1). The size 3 container interior shall accommodate four stacked tray pack cans (see figure 1). The body shall have a minimum of four plastic over-the-center latches. Latches shall be attached using stainless steel (American Iron and Steel Institute (AISI) types 304L or 316) machine screws threaded into stainless steel (any AISI type 400 series) backing plates molded into the body. Backing plates shall be drilled and tapped to accept the screws. The latches shall be recessed from the outside edge of the body in both the latched and unlatched positions. Latches shall clamp the lid sufficiently to compress the seal. No air shall leak between the lid and body with the latches in the closed position.

2.1.3 Lid. The insulated lid shall be sealed, double walled, and made of high density plastic, which is Food and Drug Administration (FDA) food grade approved, and insulated to comply with the temperature performance specified in 2.2. The top surface of the lid shall have recessed latching depressions to accommodate the latches installed on the body. The lid shall be furnished with a removable gasket which meets FDA and NSF International requirements for materials used in the food contact area. An openable vent shall be provided in the lid to serve as a vacuum break. The interior of the lid shall have special ribs to match the locations of the insert cover gaskets. When latched closed, the lid shall compress the insert cover gasket to form a liquid-tight seal on each insert pan.

2.1.4 Insert pans. The insert pans (3 required) shall be 22 gauge (U.S. Standard Gauge shall apply to all sheet metal thicknesses) AISI type 304 stainless steel. Insert pans shall have NSF International Standard No. 2 1isting. Each pan (6 by 11-5/8 inch inside dimensions) shall have a smooth bead around the top edge for easy cleaning and sealing. All inside comers shall be rounded and the flange (1/4 inch all around pan) shall have a minimum of 1/16 inch flat, horizontal termination around the trimmed edge to strengthen the flange on the pan. Pans shall be supplied with a 20 gauge passivated stainless steel cover and molded gasket to seal the pan from liquid leakage. The gasket shall meet all FDA regulations for articles having repeated contact

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

with food and shall function over a temperature range of -60°F to +212°F. The gasket shall not deteriorate as a result of exposure to repeated cleaning in a mechanical dishwashing environment. The gasket shall be removable from the cover for cleaning. The covers shall have a 1/8 inch diameter raised air vent (open; unsealed) and a recessed lifting handle.

2.1.5 Divider bar. The divider bar (1 required) shall be 12-3/4 inches long, color white. The divider bar for the size 1, 2 and 3 containers shall accommodate two tray pack cans (see figure 1). The divider bar shall be of sufficient strength to maintain the location and support two tray pack cans and function over a temperature range of 33° F to 180° F +/- 2° F.

2.2 Thermal performance.

2.2.1 Hot. When each insert pan (3) in the container is filled with water having a temperature of 180°F ±2°F, the water temperature shall decrease no more than 40°F when the container is exposed to an ambient temperature of 20°F ±5°F for 4 hours. Prior to testing, the container shall be preheated by filling only the three insert pans with 180°F ±5°F water, installing the pan covers and container lid, and holding for 10 minutes. Refill insert pans with water having the specified temperature. Test as specified above.

2.2.2 Co1d. When each insert pan (3) in the container is filled with water having a temperature of 33°F +2°F -0°F, the water temperature shall increase no more than 12°F when the container is exposed to an ambient temperature of l20 F ±5°for 4 hours. Prior to testing, the container shall be pre-chilled by filling only the three pans with a mixture of ice and water, installing the pan covers and container lid, and holding for 10 minutes. Empty all ice. Refill insert pans with water having the specified temperature. Test as specified above.

2.3 Codes and standards. The insulated food containers shall comply with NSF International Standard No.2.

2.4 Molded identification marking ("government unique" requirement see 6.8). When specified (see 6.3), the insulated food container shall be furnished with identification information molded or embossed into the surface of the container body. The information required shall be as follows:

"National Stock Number _____
Manufacturer's Name _____
Manufacturer's Address _____
Manufacturer's Model Number _____."

2.5 Finish. The surface of the finished container shall comply with the finish requirements of NSF International Standard No.2. If the exterior surface is textured, a smooth area shall be centered on one end of the body for attachment of a stick-on label for identifying contents by the user. The smooth area for the stick-on label shall conform to the following minimum dimensions for the container size indicated:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

Container Size	Width (inches)	Length (inches)
1	6 1/2	4 1/2
2	6 1/2	3
3	6 3/4	4 11/16

2.6 Workmanship. The insulated food containers shall be complete, clean and free of scratches, dents, breaks, sharp edges and corners, and deformities. All components and assemblies shall be free of dirt and other extraneous materials. Burrs, slivers, rough die, tool, and grinding marks, dents, and cracks shall be unacceptable. Castings, molded parts and stampings shall be free of sand, fins, pits, blow holes, and sprues. The surfaces of parts to be welded or brazed shall be clean. Scale and flux shall be removed from finished weld areas. Welds shall be smooth. Threaded fasteners shall not be missing, broken, cracked, or stripped of threads. There shall be no defects affecting serviceability, durability, operation, performance or appearance.

2.7 Classes ("government unique" requirement) (see 1.2, 6.3, and 6.8). The body and lids of the sizes of insulated food containers shall be either Brown (class 1) conforming to FED-STD-595, Color Nos. 20313, 30313, or 30279; or Green (class 2) conforming to Fed-STD-595, Color Nos. 24097, 34094, 34095, 34096, or 34097. Food containers of a specific lot shall not exhibit any variation in shade from the specific color selected and specified in the contract for that production lot. Class 3 food containers shall not reflect a "government unique" requirement for color. For class 3 containers, the color shall be selected from the manufacturer's standard commercial colors and the selected color shall be cited in the contract.

2.8 Metric products. Products manufactured to metric (SI) dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of IEEE/ASTM SI10, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric (SI) dimensions and those dimensions exceed the tolerances specified in inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer may accept or reject the metric product.

3. **REGULATORY REQUIREMENTS**

3.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Recycled or reclaimed materials may be used in the construction of the equipment described herein. Recycled and reclaimed materials shall consist of previously used material, which has been reprocessed to become a source of new raw material. Under no conditions or circumstances shall the contractor submit to the Government for acceptance reconditioned or rebuilt components as a part of the equipment described herein.

4. **PRODUCT CONFORMANCE PROVISIONS**

4.1 Product conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, and (except for any government unique requirements specified), conform to the producer’s own

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Market acceptability. The following market acceptability criteria are necessary to document the quality of the products to be provided under this Commercial Item Description:

a. The company producing the product must have been producing this product for at least 2 years, to meet the requirements of the CID.

b. The company must have sold at least 2000 units of the product meeting the requirements of this CID in the commercial marketplace over the last 2 years.

4.3 Inspection requirements. Bid samples may be required for CID items when necessary to assure product quality. In general, first article testing should not be required. First article testing may only be required for those items produced on demand, which are customized. Detailed procedures on inspection requirements or sampling in a CID should be minimized and used only when no other method for assuring quality is acceptable.

4.4. NSF International standard compliance. Prior to approval of the first shipment, the contractor shall provide satisfactory evidence to the contracting officer (or his authorized representative) that the food containers conform to the applicable requirements of NSF International Standard No.2. Acceptable evidence of meeting the requirements of NSF International Standard No.2 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to medical authority of the Government indicating that the item complies with the applicable NSF International requirement.

4.5. Warranty. Unless otherwise specified in the contract, the manufacturer's standard commercial warranty shall apply.

5. PACKAGING

5.1. Packaging. Preservation, packing and marking requirements shall be as specified in the contract or purchase order (see 6.3).

6. NOTES

6.1 Intended use. The insulated food containers are intended for use in transporting either hot (160°F to 180°F) or cold (35°F to 40°F) foods to remote feeding sites. Ambient temperatures range between -20°F to + 120°F.

6.2. Commercial item certification. When this CID is used for procurement, the commercial item certification clause must appear in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

6.3 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this document.
b. Size and class of container required (see 1.2, 2.1, and 2.7).
c. When molded in identification marking is required (see 2.4).
d. Packaging requirements (see 5.1).
e. Color of Class 3 containers (see 1.2 and 2.7).

6.4 Sources for documents.

6.4.1 Sources for Government documents. Copies of military and federal documents are available from:

Document Automation and Production Service
Building 4D (DPM-DODSSP)
700 Robbins Avenue
Philadelphia, PA 19111-5094

6.4.2 Sources for non-government association documents. Copies of referenced non-government documents may be obtained from the following organizations:

IEEE/ASTM STANDARD

SI10 – Standard for Use of the International Systems of Units (SI): the Modern Metric System

(Copies of the IEEE/ASTM standard should be addressed to the Institute of Electrical and Electronics Engineers, Inc., 345 East 47th Street, New York, NY 10017; or to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959).

NSF International

Standard No. 2 - Food Service Equipment

(Copies of Standard No. 2 are available from: NSF International, P.O. Box 130140, Ann Arbor, MI 48113-0140).

6.5 National stock numbers (NSN). The following is a list of NSN's assigned which correspond to this document. The list may not be indicative of all possible NSN's associated with the document:

DOCUMENT	SIZE	CLASS	NSN
A-A-52193	1	1	7360-01-487-3154
A-A-52193	1	2	7360-01-487-3143
A-A-52193	3	1	7360-01-487-2729
A-A-52193	3	2	7360-01-487-2726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

6.6 Part identification number(PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PIN shall be constructed as follows:

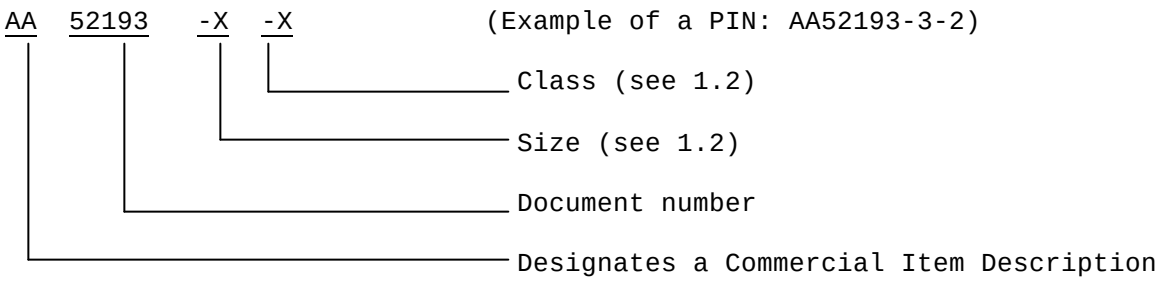

6.7 Subject term(key word) list.

Carrier, insulated
Container, insulated food
Food, container
Insulated, container

6.8 "Government unique" requirements. Whenever a "government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it means that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer(s) of the subject commodity.

6.9 Sources of supply. The manufacturer whose product, when modified to the “Government unique requirements” is known to meet the CID requirements, is listed below. However, competition is not limited to this company:

Cambro Manufacturing Company
7601 Clay Avenue
Huntington Beach, CA 92648
(800) 854-7631

MILITARY INTEREST:

Custodians:
Army - GL
Air Force - 99
Navy - SA

Review activities:
Army - MD
Air Force - 35, 84
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS/7FXE

Preparing Activity:

DLA - SS

DoD Project 7330-0789

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

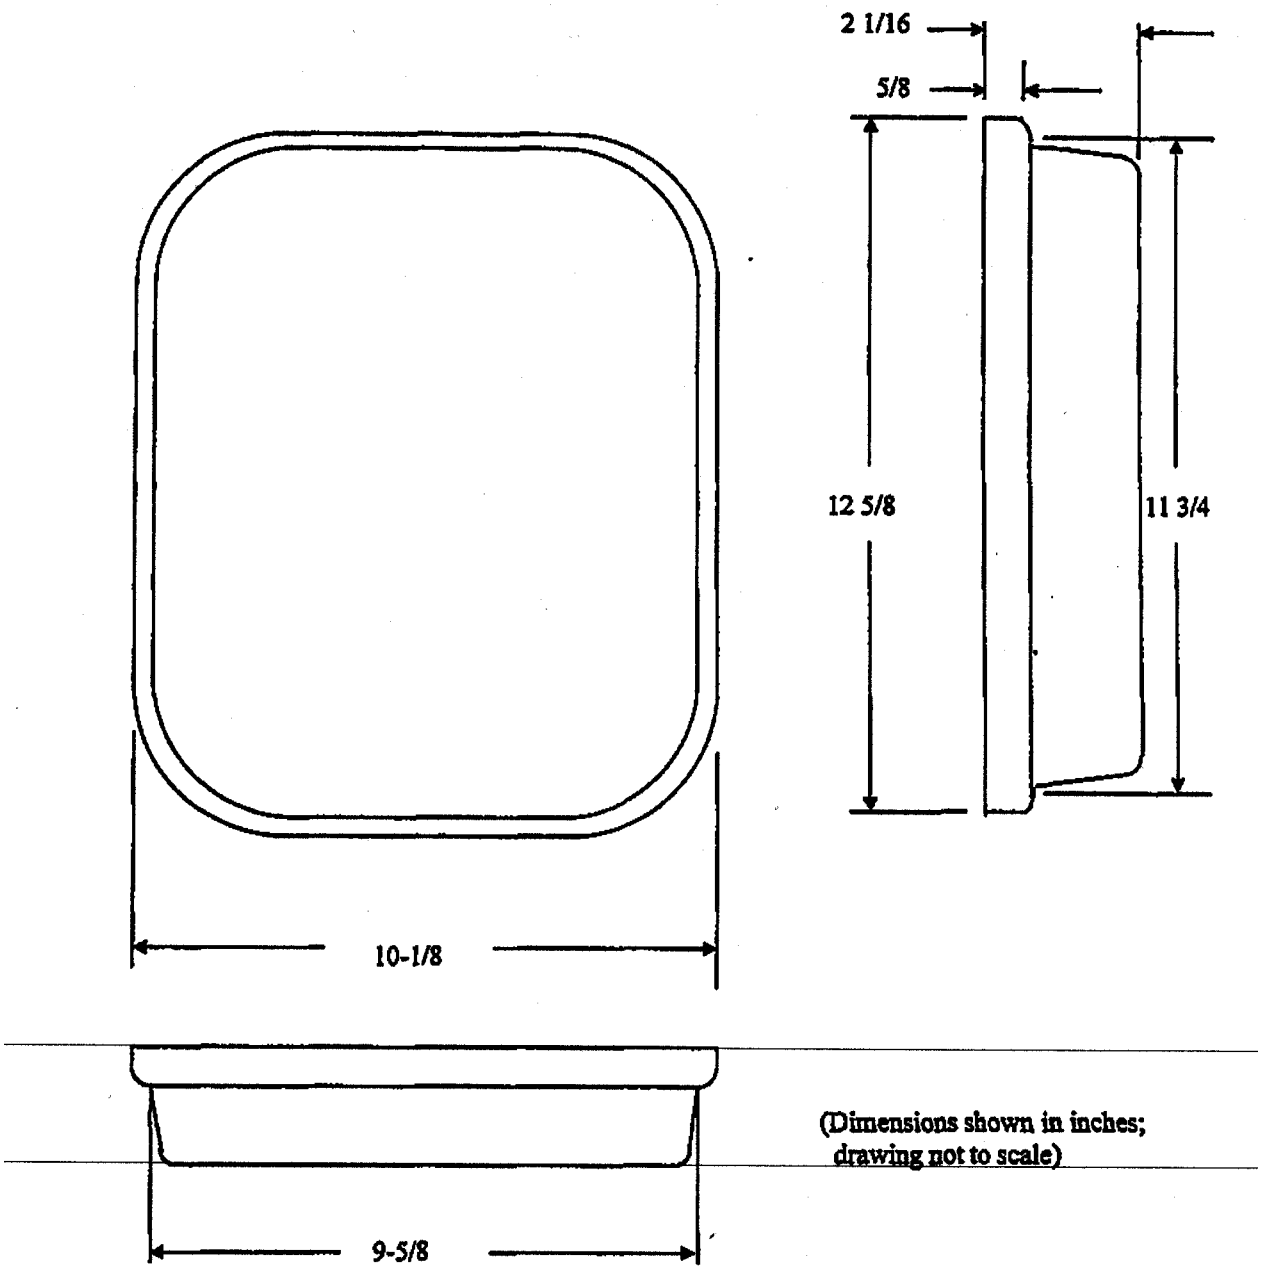

Tray Pack Can

Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.