INCH-POUND
A-A-52200
18 January 1996
SUPERSEDING
MS220002-1
30 October 1991

COMMERCIAL ITEM DESCRIPTION

LINK ASSEMBLY, CONNECTOR, SEPARABLE

The General Services Administration has authorized the use of this commercial item description as a preferable replacement for MS22002-1 for all federal agencies.

1. SCOPE.

1.1 This commercial item description covers a separable steel connector link, of conventional type, used by U.S. Army riggers to connect a parachutist's risers to parachute canopy suspension lines.

2. CLASSIFICATION. The connector links shall conform to the following types (see 3.2.1 and 7.1).

2.1 Type.

Type I - Screw, slotted
Type II - Screw, cross recessed

3. SALIENT CHARACTERISTICS.

3.1 Materials. Materials shall be of the high quality used by the manufacturer in his standard commercial products for parachute hardware, provided that the completed item complies with all provisions of this document (see 5.1).

Beneficial comments, recommendations, additions, deletions, clarification, etc. and any other data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SSCNC-UTE, Natick, MA 01760-5017.

AMSC N/A FSC 1670

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.1.1 Legs. The connector link legs will be identical and interchangeable and manufactured of heat treated alloy steel.

3.1.2 Screws. The screws shall be identical and interchangeable and manufactured of heat treated steel.

3.2 Design and construction. The design and construction of the connector links shall conform in all respects to the requirements specified herein. (see 5.1).

3.2.1 Assembly. One complete rectangular shaped link shall consist of two L shaped legs fastened together with two screws. The Type I link shall have two legs assembled with two slotted head screws.The Type II link shall have two legs assembled with two cross recessed head screws. The screws shall have a minimum of six (6) full turns when fully assembled, and hand tightened.

3.2.2 Dimensions. The nominal overall length shall be 2.34 in., by 1.19 in. nominal overall width, with a 1.5 in. nominal inside width between the legs.

3.2.3 Threads. The screw threads for the legs shall be 10-40 UNS-2B. The screw threads for the screws shall be 10-40 UNS-2A.

3.2.4 Heat treating. The legs-and screws shall be heat treated to the required tensile strength to meet the proof load.

3.2.5 Proof load. When subjected to a uniformly distributed pull force perpendicular to the long side of each leg, the connector link shall withstand a minimum proof load of 3,000 pounds. There shall be no permanent deformation and the screws shall be able to be loosened and reseated manually.

3.3 Finish. All surfaces shall be smooth with no burrs or sharp edges. The surface textures unless otherwise specified shall be 125/max in accordance with ANSI B46.1. The connector legs and screws will be cadmium or zinc chromate plated or immersion zinc flake/chromate dispersion coated with a clear sealer or equivalent, as determined by the contractor.

3.4 Cleanliness. The connector links shall be clean and free or dirt, grease or lubricants, with no signs of rust or discoloration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. The finished connector links shall conform to the quality of product established by this document for parachute hardware. The occurrence of any defects shall not exceed the contractor's own quality assurance standards defined by the technical data in the bid package.

4. REGULATORY REQUIREMENTS.

4.1 The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 When required, offerors shall submit samples of their intended production to be analyzed and evaluated by the Government. The bid sample will consist of units independently developed. Evaluation criteria and basis of award are contained in the solicitation. The bid samples will be retained by the Government. one (1) bid sample approved by the contracting agency will serve as a manufactured standard for the corresponding production items delivered under the contract. Offerers are advised that the bid sample does not relieve the successful offeror of his responsibility to perform in accordance with the commercial item description specified above.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.3 Market acceptability criteria. The item offered must have been sold to the commercial market or to the Government, and the contractor shall certify and provide supporting documentation as to the serviceability and the long term (one year) availability of all necessary maintenance and logistics support parts and materials.

5.4 Warranty. If applicable, the item offered shall include the standard warranty given to the commercial market.

6. PACKAGING.

6.2 Preservation and packing. Preservation and packing shall be commercial preservation and packing in accordance with ASTM D 3951 or as specified in the contract or purchase order.

6.2 Palletization. When specified (see 7.1) the connector links shall be palletized in accordance with ASTM D 4649 and ASTM D 4675.

6.3 Marking. In addition to any special marking required by the contract or order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with ASTM D 3951.

7. NOTES.

7.1 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type required (see 2.1). Army procurements shall be Type I.
c. Selection of applicable packaging and packing (see 6.1).
d. Palletization when required (see 6.2).

7.2 Sources of documents.

7.2.1 The following ANSI Standards are available from the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036:

ANSI B 46.1 - Surface Texture (Surface Roughness, Waviness, and Lay)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

7.2.2 The following ASTM Standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187:

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM D 4649 - Standard Guide for Selection of Stretch, Shrink, and Net Wrap Materials

ASTM D 4675 - Standard Guide for Selection and Use of Flat Strapping Materials

7.3 Known sources for the item(s) described:

U.S. Forgecraft Corp
P.O. BOX 387
Fort Smith, AR 72902
Model No. MS22002-1

Para-Gear Equipment Co. Inc
3839 West Oakton St.
Skokie, IL 60076-3438
Model No. MS22002-1

Capewell Components
46 Nooks Hill Road
Cromwell, CT 06416
Model No. MS 22002

The RW Shop Inc.
27 Route 13
Brookline, NH 03033
Model NO. RW 359

7.4 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the offeror/contractor.

This example describes a part numbering system for CID A-A-5220.

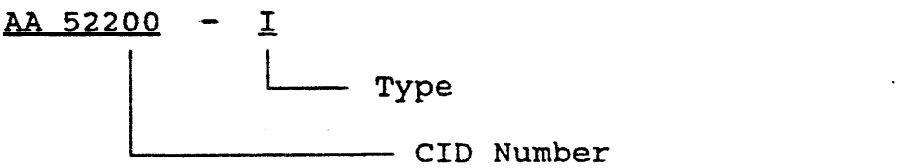

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.