INCH-POUND

A-A-52202
May 20, 1996

COMMERCIAL ITEM DESCRIPTION

OPENER, CAN, HAND, FOR TRAY PACKS AND ROUND CANS

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-O-44368 for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers one type and size of hand held can opener for severing the tops of rimmed rectangular metal tray packs and round cans.

1.2 Intended use. The hand held can opener is to be used to sever the tops of rimmed rectangular metal tray pack cans, (approximately 12 1/2 inches by 10 3/8 inches by 2 inches), and round cans, (ranging from approximately 4 1/16 inches to 6 3/16 inches in diameter by 4 11/16 inches to 7 inches high), transported in insulated carriers to small combat groups under constraints that preclude access to field kitchens.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other pertinent data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development and Engineering Center, ATTN:SSCNC-WEF, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal(DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Materials and components. Materials and components shall be of the quality normally used for this purpose in commercial practice provided the completed can opener complies with all provisions of this commercial item description.

2.2 Design and construction. The can opener shall be the manufacturer's standard commercial product similar to the design in figure 2 as specified in 2.2.1, 2.2.2, and 2.2.3. The design of the can opener shall be compatible with the handle and body modifications that are "Government unique" (see 6.4) as specified in figures 3, 4, 5, and 6. All parts that come in contact with, or may be contaminated by food, shall be easily cleaned and capable of being sanitized.

2.2.1 Can opener. The overall length of the can opener shall be 6.875 inches. The can opener shall have a wing operated feed wheel and a gear driven cutting wheel. The body of the opener shall be made from a material that will weld to 300 series stainless steel, and shall have an integral can guide with a minimum projection of 0.438 inches. The handle shall be padded with no gap between the padded and the metal portions of the handle.

2.2.2 Feed wheel. The feed wheel shall be fabricated of free machining steel and shall be case hardened to a depth of 0.008 inches with a Rockwell 15-N hardness of 89.2 to 90.2. The feed wheel shall have sharp teeth equally spaced around the wheel circumference and shall be permanently attached to the wing type handle by a metal shaft passing through the opener body. Testing shall be as specified in 4.3 and 4.4.

2.2.3 Cutting wheel. The cutting wheel shall be fabricated of free machining steel. The cutting wheel shall be chamfered to a sharp cutting edge and mounted on a plier or cam type pressure device which is engaged when pressure is applied by squeezing the handles. The cutting wheel shall be at an angle of 20 to 30 degrees with the surface of the feed wheel. The edge of the cutting wheel shall not come in contact with the feed wheel edge. The cutting wheel shall be case hardened to a depth of 0.006 inches. Using the Knoop microhardness test at a 400 gram load, the following hardness ranges shall be required: 0.002 inches = 600 - 700; 0.004 inches = 550 - 700; 0.006 inches = 500 - 700. Testing shall be as specified in 4.3 and 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

2.3 Lubrication. All points of the can opener requiring lubrication shall be lubricated with the manufacturer's recommended food service equipment grade lubricant. The lubricant shall not cause food contamination.

2.4 Instruction sheet. An instruction sheet, showing the position of the guide plate for opening round cans and tray packs, shall be provided with each can opener (see figure 1). The instruction sheet shall be clearly and legibly printed on plain white paper measuring approximately 4 by 4 inches.

2.5 Standard compliance. Fabrication of the hand held can opener shall comply with the requirements of NSF International Standard No. 2 as specified in 4.2.

2.6 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of ASTM E 380, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.7 Workmanship. The finished hand held can opener shall be clean and free of rust, slivers, burrs, deep scratches, pits, and tool marks. Surfaces shall be free of loose or flaked plating. All sharp edges and corners shall be removed. The can opener shall not be bent, damaged, or distorted. There shall be no defects which impair the durability, appearance, or serviceability of the item.

3. REGULATORY REQUIREMENTS

3.1 Contractor recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, except for those "Government unique" requirements specified, shall conform to the producer's own drawings, specifications, standards and quality assurance practices, and be the same

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

product that has been sold in the commercial marketplace for over one year, or is the same product that has successfully been delivered to the Government on a previous contract or purchase order. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 NSF International standard compliance. Prior to the approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the hand held can openers conform to the applicable requirements of NSF International Standard No. 2. Acceptable evidence shall be a certified test report from a recognized independent testing laboratory acceptable to the medical authority of the service for which the items are being procured, stating that the can openers have been tested and conform to NSF International Standard No. 2. Acceptance of the independent testing laboratory to the medical authority shall be based on the laboratory submitting to the contracting officer a written letter from either the American Association for Laboratory Accreditation (A2LA), Gaithersburg, MD or the American National Standards Institute (ANSI), Washington, DC stating the independent test laboratory has been evaluated and is accredited for testing and evaluating food service equipment for conformance with applicable NSF International Standards. Accreditation of the independent testing laboratory must be completed prior to the item testing.

4.3 Hardness test. The components specified in 2.2.2 and 2.2.3 shall be tested in accordance with ASTM E 18 for Rockwell hardness requirements and ASTM E 384 for Knoop microhardness requirements. The Knoop testing shall be performed using a 400 gram force load. The Knoop microhardness test shall be performed at a point midway between the wheel edge and center of the wheel.

4.4 Case depth test. The depth of the case hardening of the feed wheel and cutting wheel shall be microscopically determined in accordance with ASTM E 1077. The determination shall be made at a point midway between the wheel edge and center of the wheel.

4.5 Performance test. The hand held can opener shall completely sever the tops of one rimmed rectangular metal tray pack and one round can, dimensions specified in 1.2, without leaving a sharp edge or any protrusion in the can. The opener shall not tilt or slide during the opening of the metal tray pack and round can.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Preservation, packing and marking shall be as specified in the contract or purchase order (see 6.1).

6. NOTES

6.1 Ordering data. Acquisition documents must specify the following:

a. Title, number and date of this document.
b. Packaging requirements (see 5.1).

6.2 National Stock Number. The following NSN corresponds to this CID: 7330-01-245-0201.

6.3 Sources for non-Government association documents.

ASTM Standards:

A 167	-	Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
E 18	-	Methods of Tests for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
E 380	-	Use of the International System of Units (SI) (the Modernized Metric System)
E 384	-	Standard Test Method for Microhardness of Materials
E 1077	-	Standard Test Method for Estimating the Depth of Decarburization of Steel Specimens

(ASTM standards are available from the American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428)

NSF International:

NSF International Standard No. 2 - Food Service Equipment and Related Products, Components and Materials

(Copies of NSF International Standard No. 2 are available from NSF International, 3475 Plymouth Road, Ann Arbor, MI 48105)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

6.4 "Government unique" requirement. Whenever "Government unique" is included in a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

6.5 Sources of supply. The manufacturer whose product is known to meet the CID requirements is listed below. However, competition is not limited to this company:

Swing-A-Way Mfg. Co.
4100 Beck Avenue
St. Louis, MO 63116

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review activities

Army - MD1, QM1
Navy - MC
Air Force - 35, 84
DLA - GS, SS

CIVIL AGENCY COORDINATING ACTIVITY:


GSA-FSS

PREPARING ACTIVITY:


Army - GL

Project No. 7330-0710

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

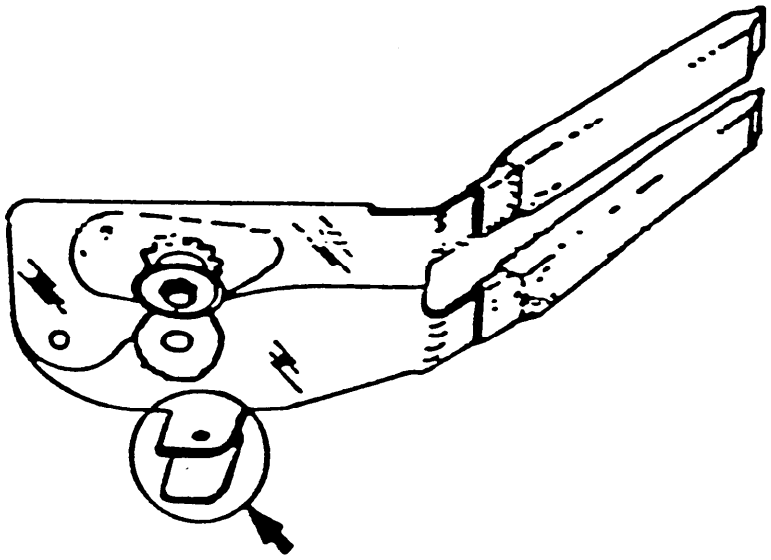

POSITION OF GUIDE PLATE FOR OPENING TRAY PACKS

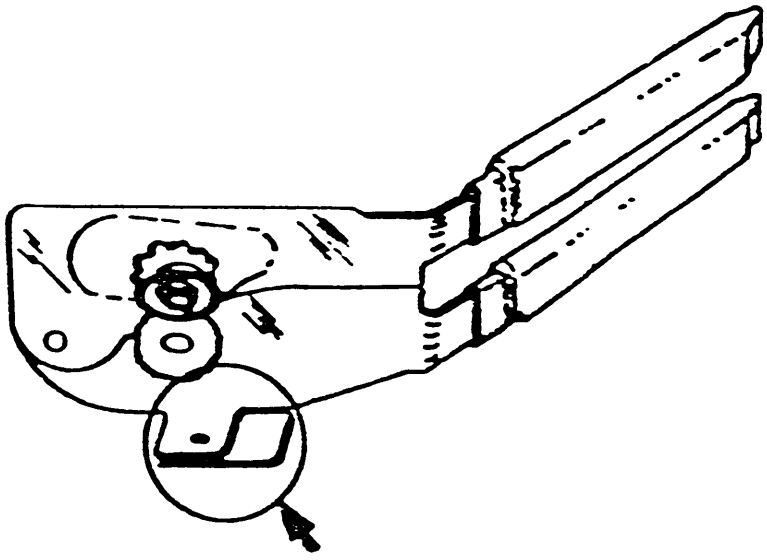

POSITION OF GUIDE PLATE FOR OPENING CANS

FIGURE 1. INSTRUCTION SHEET FOR CAN OPENER.

Source: https://assist.dla.mil --Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

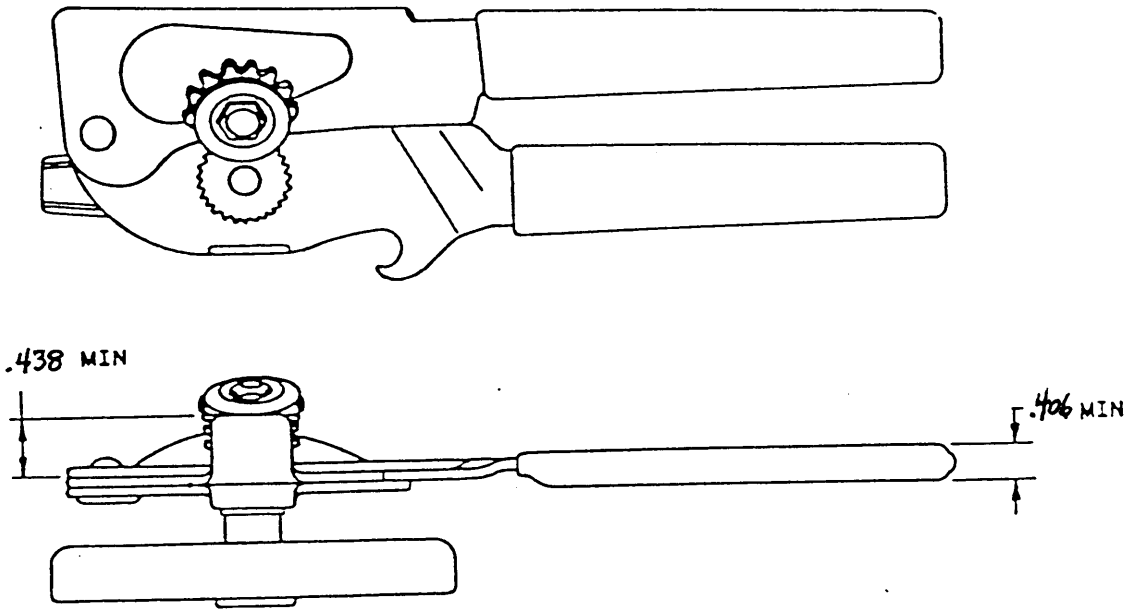


FIGURE 2. CAN OPENER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NOTE:

1. BEND SHALL BE AT BASE OF PLASTIC HANDLES.

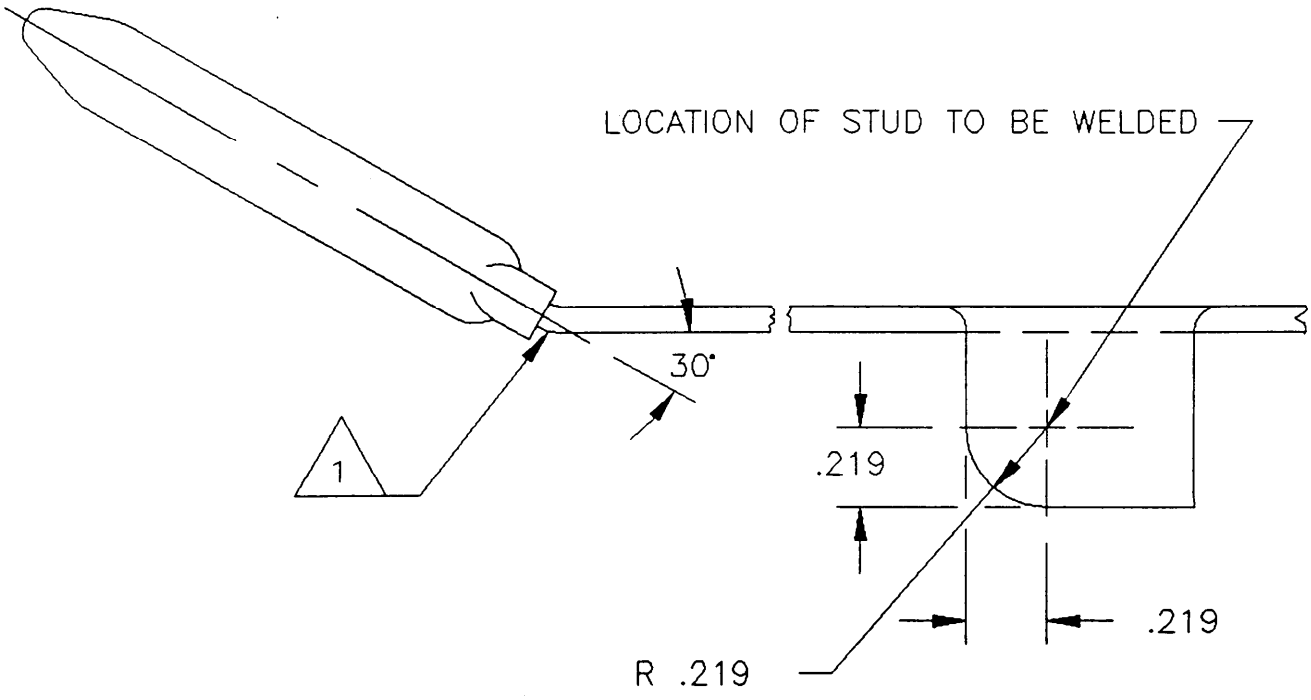


FIGURE 3. CAN OPENER HANDLE MODIFICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. STUD ITEM (2) TO BE PERMANENTLY FASTENED TO ITEM (1) FIGURE 3, CAN OPENER HANDLE MODIFICATION.

2. SELF–LOCKING HEX NUT, .190–32UNF–3B, ITEM (5) TO BE INSTALLED SO THAT THE GUIDE PLATE ITEM (3) MOVES WITH SLIGHT DRAG.

3. SPRING TENSION WASHER ITEM (4), .375 O.D. X .195 I.D. X .015 THICK.

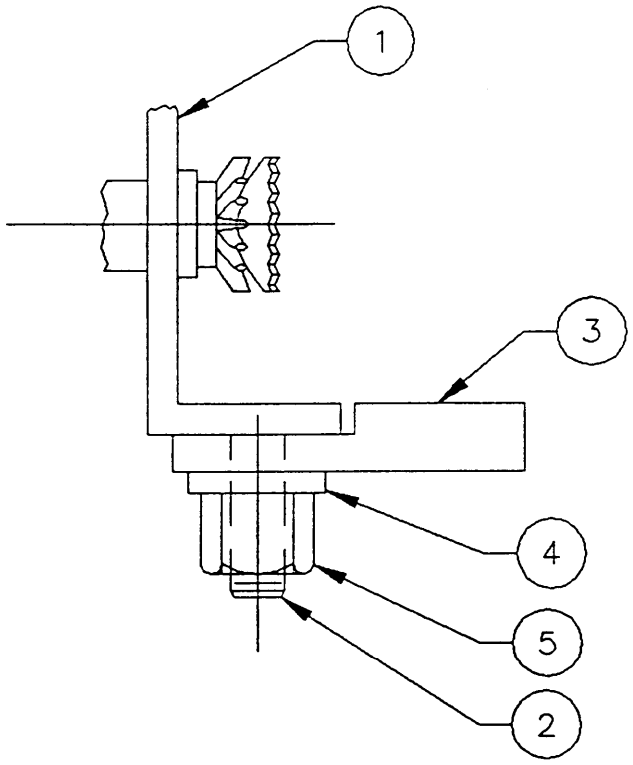


FIGURE 4. CAN OPENER BODY MODIFICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: STAINLESS STEEL, 300 SERIES.

2. ITEM TO HAVE #10–32 UNF–2A THREADS FOR NO LESS THAN 75% OF THE LENGTH OF THE STUD.

3. ITEM SHALL BE DESIGNED FOR CAPACITOR DISCHARGE TYPE FASTENING METHOD.

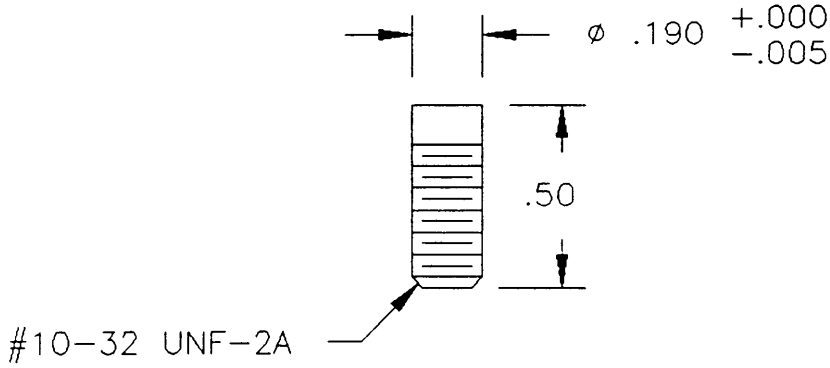


FIGURE 5. STUD.

NOTES:

1. MATERIAL: STAINLESS STEEL SHEET, 7 GA, TYPE 304, ASTM A167.

2. REMOVE ALL BURRS AND SHARP EDGES.

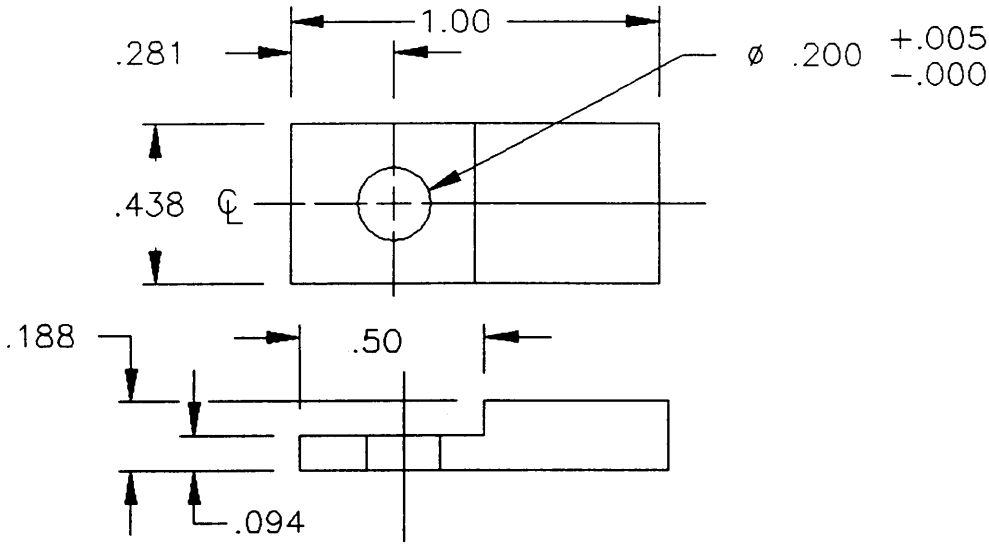


FIGURE 6, GUIDE PLATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52202	960520

3. DOCUMENT TITLE

Opener, Can, Hand, for Tray Packs and Round Cans

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U.S. Army Natick RD&E Center	508-233-5175	256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SSCNC-WEF Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.