INCH-POUND
A-A-52202B
October 16, 2007
SUPERSEDING
A-A-52202A
June 26, 1998

COMMERCIAL ITEM DESCRIPTION

OPENER, CAN, HAND, FOR TRAY PACKS AND ROUND CANS

The General Services Administration has authorized the use of this Commercial Item Description (CID) as a replacement for MIL-O-44368 for all Federal agencies.

1. SCOPE.

1.1 This CID covers one type and size of hand held can opener for severing the tops of rimmed rectangular metal tray packs and round cans suitable for use by Federal, State, local governments and other interested parties.

1.2 Intended use of the hand held can opener is to sever the tops of rimmed rectangular metal tray pack cans, (approximately 12 1/2 inches by 10 3/8 inches by 2 inches), and round cans, (ranging from approximately 4 1/16 inches to 6 3/16 inches in diameter by 4 11/16 inches to 7 inches high), for feeding small combat groups in the field.

2. SALIENT CHARACTERISTICS.

2.1 Materials and components. Materials and components shall be of the quality normally used for this purpose in commercial practice provided the completed can opener complies with all provisions of this CID.

2.2 Design and construction. The can opener shall be the manufacturer's standard commercial product similar to the design in figure 2 as specified in 2.2.1, 2.2.2, and 2.2.3. The design of the can opener shall be compatible with the handle and body modifications that are "Government unique" (see 6.4) as specified in figures 3, 4, 5, and 6. All parts that come in contact with, or may be contaminated by food, shall be easily cleaned and capable of being sanitized.

2.2.1 Can opener. The overall length of the can opener shall be 6.875 inches. The can opener shall have a wing operated feed wheel and a gear driven cutting wheel. The body of the opener

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Philadelphia (DSCP), ATTN: DSCP-FTSA, 700 Robbins Avenue, Philadelphia, PA 19111-5092.

AMSC N/A **FSC 7330**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

shall be made from a material that will weld to 300 series stainless steel, and shall have an integral can guide with a minimum projection of 0.438 inches. The handle shall be padded with no gap between the padded and the metal portions of the handle.

2.2.2 Feed wheel. The feed wheel shall be fabricated of free machining steel and shall be case hardened to a depth of 0.008 inches with a Rockwell 15-N hardness of 89.2 to 90.2. The feed wheel shall have sharp teeth equally spaced around the wheel circumference and shall be permanently attached to the wing type handle by a metal shaft passing through the opener body. Testing shall be as specified in 4.3 and 4.4.

2.2.3 Cutting wheel. The cutting wheel shall be fabricated of free machining steel. The cutting wheel shall be chamfered to a sharp cutting edge and mounted on a plier or cam type pressure device which is engaged when pressure is applied by squeezing the handles. The cutting wheel shall be at an angle of 20 to 30 degrees with the surface of the feed wheel. The edge of the cutting wheel shall not come in contact with the feed wheel edge. The cutting wheel shall be case hardened to a depth of 0.006 inches. Using the Knoop microhardness test at a 400 gram load, the following hardness ranges shall be required: 0.002 inches = 600 - 700; 0.004 inches = 550 - 700; 0.006 inches = 500 - 700. Testing shall be as specified in 4.3 and 4.4.

2.3 Lubrication. All points of the can opener requiring lubrication shall be lubricated with the manufacturer's recommended food service equipment grade lubricant.

2.4 Instruction sheet. An instruction sheet, showing the position of the guide plate for opening round cans and tray packs, shall be provided with each can opener (see figure 1). The instruction sheet shall be clearly and legibly printed on plain white paper measuring approximately 4 by 4 inches.

2.5 Standard compliance. Fabrication of the hand held can opener shall comply with the requirements of NSF International Standard No. 2 as specified in 4.2.

2.6 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of IEEE/ASTM SI 10, and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.7 Workmanship. The finished hand held can opener shall be clean and free of rust, slivers, burrs, deep scratches, pits, and tool marks. Surfaces shall be free of loose or flaked plating. All sharp edges and corners shall be removed. The can opener shall not be bent, damaged, or distorted. There shall be no defects which impair the durability, appearance, or serviceability of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIREMENTS.

3.1 Contractor recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS.

4.1 Product conformance. The products provided shall meet the salient characteristics of this CID, except for those "Government unique" requirements specified, shall conform to the producer's own drawings, specifications, standards and quality assurance practices, and be the same product that has been sold in the commercial marketplace, or is the same product that has successfully been delivered to the Government on a previous contract or purchase order. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.1.1 Market acceptability (criteria). The following market acceptability criteria is necessary to document the quality of the product to be provided under this CID: The company must have sold 3000 units meeting the requirements of this CID in the commercial or government marketplace over the past 2 years.

4.2 NSF International standard compliance. Prior to the approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the hand held can openers conform to the applicable requirements of NSF International Standard No. 2. Acceptable evidence shall be a certified test report from a recognized independent testing laboratory acceptable to the medical authority of the service for which the items are being procured, stating that the can openers have been tested and conform to NSF International Standard No. 2. Acceptance of the independent testing laboratory to the medical authority shall be based on the laboratory submitting to the contracting officer a written letter from either the American Association for Laboratory Accreditation (A2LA), Gaithersburg, MD or the American National Standards Institute (ANSI), Washington, DC stating the independent test laboratory has been evaluated and is accredited for testing and evaluating food service equipment for conformance with applicable NSF International Standards. Accreditation of the independent testing laboratory must be completed prior to the item testing.

4.3 Hardness test. The components specified in 2.2.2 and 2.2.3 shall be tested in accordance with ASTM E 18 for Rockwell hardness requirements and ASTM E 384 for Knoop microhardness requirements. The Knoop testing shall be performed using a 400 gram force load. The Knoop microhardness test shall be performed at a point midway between the wheel edge and center of the wheel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

4.4 Case depth test. The depth of the case hardening of the feed wheel and cutting wheel shall be microscopically determined in accordance with ASTM E 1077. The determination shall be made at a point midway between the wheel edge and center of the wheel.

4.5 Performance test. The hand held can opener shall completely sever the tops of one rimmed rectangular metal tray pack and one round can, dimensions specified in 1.2, without leaving a sharp edge or any protrusion in the can. The opener shall not tilt or slide during the opening of the metal tray pack and round can.

5. PACKAGING.

5.1 Packaging. Preservation, packing and marking shall be as specified in the contract or purchase order (see 6.1).

6. NOTES.

6.1 Ordering data. Acquisition documents must specify the following:

a. Title, number and date of this document.
b. Packaging requirements (see 5.1).

6.2 Sources of documents.

6.2.1 Sources of information for nongovernmental documents are as follows:

IEEE/ASTM Standards:

A 167 - Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.
E 18 - Standard Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.
SI 10 - Standard for Use of the International System of Units (SI): The Modern Metric System.
E 384 - Standard Test Method for Microindentation Hardness of Materials.
E 1077 - Standard Test Methods for Estimating the Depth of Decarburization of Steel Specimens.

(IEEE and ASTM Internaltional publish these standards jointly. Copies are available from www.ieee.org IEEE Service Center, 445 Hoes Lane, Piscataway, NJ 08854-1331 or www.astm.org or ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NSF/ANSI Standards:

NSF/ANSI 2 - Food Equipment.
NSF 2 Supplement - Descriptive Details for Food Service Equipment Standards.

(Copies of NSF/ANSI Standard No. 2 and Supplement are available from NSF International, P.O. Box 130140, 789 North Dixboro Road, Ann Arbor, MI 48113-0140, telephone (734) 769-8010. Internet address: http://www.nsf.org).

6.2.2 Source of information for governmental document is as follows:


Copies of the Federal Acquisition Regulation (FAR) documents may be obtained from: Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250, telephone (202) 512-1800. Internet address: http://www.acqnet.gov/far.

6.3 "Government unique" requirement. Whenever "Government unique" is included in a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.


6.4 Source of supply. The manufacturer's product shall be modified to meet the "Government unique" requirements. Competition is not limited to this company:

Swing-A-Way Mfg. Co.
4100 Beck Avenue
St. Louis, MO 63116
(314) 773-1487
"(Model S-10)"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

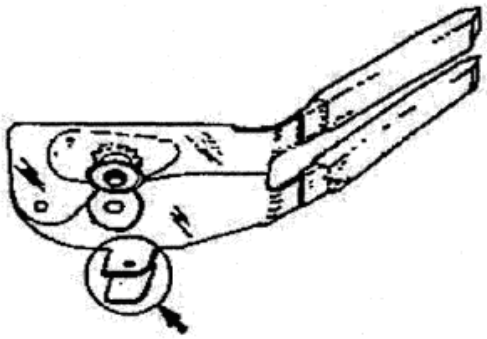

POSITION OF GUIDE PLATE FOR OPENING TRAY PACKS

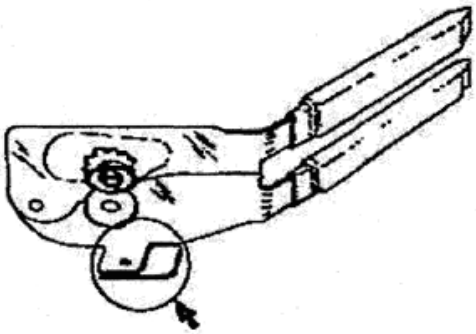

POSITION OF GUIDE PLATE FOR OPENING CANS

FIGURE 1. INSTRUCTION SHEET FOR CAN OPENER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

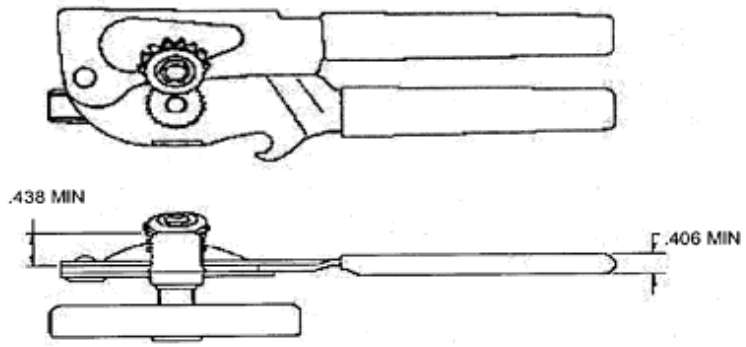


FIGURE 2. CAN OPENER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NOTE:

1 BEND SHALL BE AT BASE OF PLASTIC HANDLES.

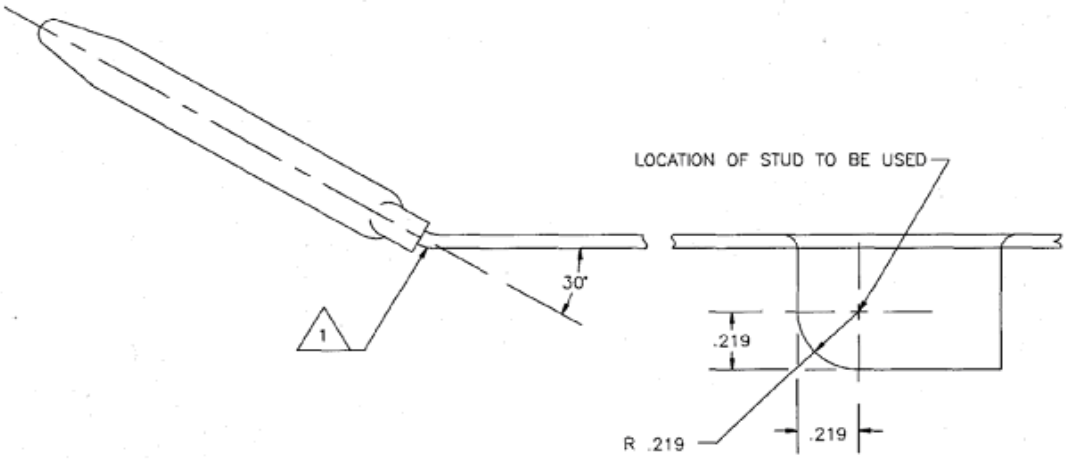


FIGURE 3. CAN OPENER HANDLE MODIFICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. STUD ITEM (2) TO BE PERMANENTLY FASTENED TO ITEM (1) FIGURE 3, CAN OPENER HANDLE MODIFICATION
2. SELF-LOCKING HEX NUT, .190-32UNF-3B, ITEM (5) TO BE INSTALLED SO THAT THE GUIDE PLATE ITEM (3) MOVES WITH SLIGHT DRAG.
3 SPRING TENSION WASHER ITEM (4), .375 O.D. x .195 I.D. x .015 THICK.

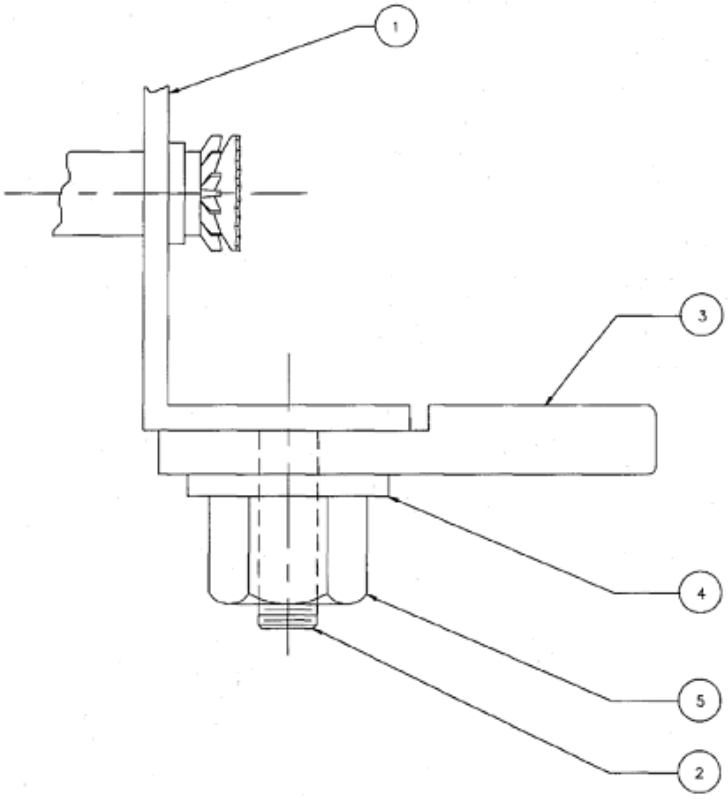


FIGURE 4. CAN OPENER BODY MODIFICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: STAINLESS STEEL, 300 SERIES.
2. ITEM TO HAVE #10-32 UNF-2A THREADS FOR NO LESS THAN 75% OF THE LENGTH OF THE STUD.
3. ITEM SHALL BE DESIGNED FOR CAPACITOR DISCHARGE TYPE FASTENING METHOD.

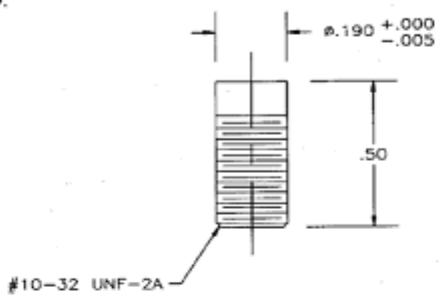


FIGURE 5. STUD.

NOTES:

1. MATERIAL: STAINLESS STEEL SHEET, 7 GA, TYPE 304, ASTM A167.
2. REMOVE ALL BURRS AND SHARP EDGES.

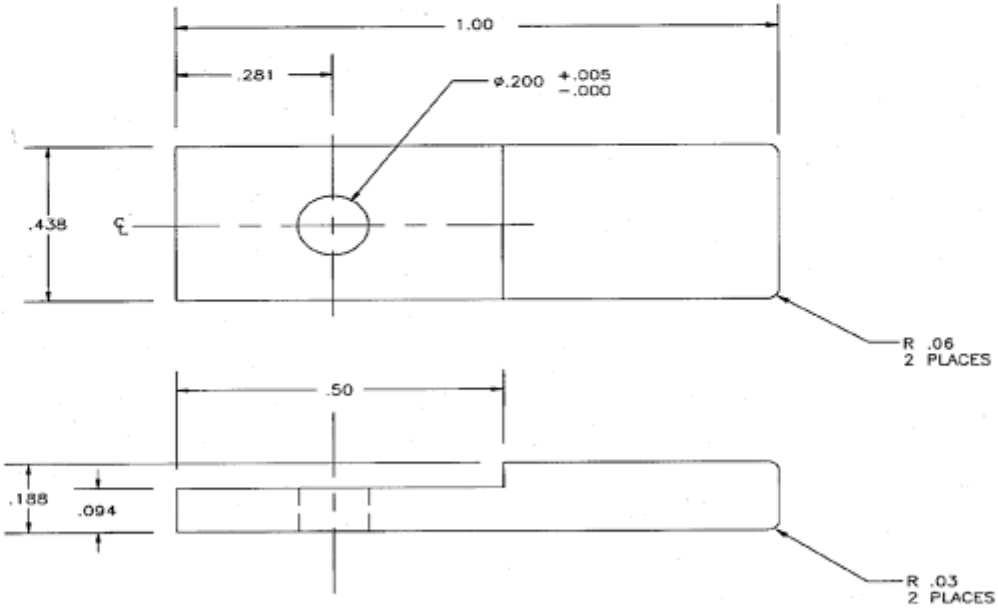


FIGURE 6. GUIDE PLATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD1, QM1
Navy - MC
Air Force - 35, 84

PREPARING ACTIVITY:
DLA - SS

(Project No. 7330-0800-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.