INCH-POUND

A-A-52215
January 7, 1997
SUPERSEDING
MIL-S-43104B
27 February 1968

COMMERCIAL ITEM DESCRIPTION

STRAPPING AND SEALING KITS, HAND-OPERATED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description (CID) covers hand-operated, flat steel, strapping and sealing kits. The strapping and sealing kits are used for securing and reinforcing bales, boxes, bundles, crates and similar items, and for securing material within freight cars or trucks for shipment.

2. CLASSIFICATION

2.1 Classification. The strapping and sealing kits shall be of the following types as specified (see 7.1):

Type I - 3/8-inch wide strapping
Type II - 1/2-inch wide strapping
Type III - 5/8-inch wide strapping
Type IV - 3/4-inch wide strapping
Type V - 1-1/4 inch wide strapping
Type VI - 2-inch wide strapping

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Components of kits. The components of the type I through type VI kits, and the required quantities per kit, shall be as listed in tables I through VI.

TABLE I - Type I kit components

Component	Quantity required	Requirement paragraph
Stretcher, steel strapping, hand; for 3/8 inch by 0.020-inch strapping	1	3.1.1.1
Sealer, steel strapping, hand; for 3/8 inch by 0.020-inch strapping	1	3.1.2.1
Seal, steel strapping, for 3/8 inch by 0.020 inch strapping	2000	3.1.3.1
Steel strapping, flat, 3/8 inch by 0.020 inch	90 pounds min weight	3.1.4.1
Box for kit components	1	3.1.6

TABLE II - Type II kit components

Component	Quantity required	Requirement paragraph
Stretcher, steel strapping, hand; for 1/2 inch by 0.020-inch strapping	1	3.1.1.1
Sealer, steel strapping, hand; for 1/2 inch by 0.020-inch strapping	1	3.1.2.1
Seal, steel strapping, for 1/2 inch by 0.020 inch strapping	2000	3.1.3.2
Steel strapping, flat, 1/2 inch by 0.020 inch	90 pounds min weight	3.1.4.2
Box for kit components	1	3.1.6

TABLE III - Type III kit components

Component	Quantity required	Requirement paragraph
Stretcher, steel strapping, hand; for 5/8 inch by 0.020-inch strapping	1	3.1.1.1
Sealer, steel strapping, hand; for 5/8 inch by 0.020-inch strapping	1	3.1.2.1
Seal, steel strapping, for 5/8 inch by 0.020-inch strapping	1600	3.1.3.3
Steel strapping, flat, 5/8 inch by 0.020 inch	90 pounds min weight	3.1.4.3
Box for kit components	1	3.1.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

TABLE IV - Type IV kit components

Component	Quantity required	Requirement paragraph
Stretcher, steel strapping, hand; for 3/4 inch by 0.020-inch strapping	1	3.1.1.1
Sealer, steel strapping, hand; for 3/4 inch by 0.020-inch strapping	1	3.1.2.1
Seal, steel strapping, for 3/4 inch by 0.020-inch strapping	1500	3.1.3.4
Steel strapping, flat, 3/4 inch by 0.020 inch	90 pounds min weight	3.1.4.4
Box for kit components	1	3.1.6

TABLE V - Type V kit components

Component	Quantity required	Requirement paragraph
Stretcher, steel strapping, hand; for 1-1/4 inch by 0.035-inch strapping	1	3.1.1.2
Sealer, steel strapping, hand; for 1-1/4 inch by 0.035-inch strapping	1	3.1.2.2
Seal, steel strapping, for 1-1/4 inch by 0.035-inch strapping	100	3.1.3.5
Steel strapping, flat, 1-1/4 inch by 0.035 inch	90 pounds min weight	3.1.4.5
Cutter, steel strapping, heavy-duty	1	3.1.5
Box for kit components	1	3.1.6

TABLE VI - Type VI kit components

Component	Quantity required	Requirement paragraph
Stretcher, steel strapping, hand; for 2 inch by 0.050-inch strapping	1	3.1.1.3
Sealer, steel strapping, hand; for 2 inch by 0.050-inch strapping	1	3.1.2.2
Seal, steel strapping, for 2 inch by 0.050-inch strapping	50	3.1.3.6
Steel strapping, flat, 2 inch by 0.050 inch	90 pounds min weight	3.1.4.6
Cutter, steel strapping, heavy-duty	1	3.1.5
Box for kit components	1	3.1.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

3.1.1 Stretcher.

3.1.1.1 Types I, II, III and IV kits. The hand-operated stretcher shall conform to type II, size 2 of A-A-52211.

3.1.1.2 Type V kit. The hand-operated stretcher shall conform to type III, size 3 of A-A-52211.

3.1.1.3 Type VI kit. The hand-operated stretcher shall conform to type III, size 4 of A-A-52211.

3.1.2 Sealer.

3.1.2.1 Types I, II, III and IV kits. The hand-operated sealer shall be light duty type with double notch, end jaw, and handles vertical to strapping. The sealer shall join two thicknesses of strapping by clinching and notching the applicable seals about the strapping.

3.1.2.2 Types V and VI kits. The hand-operated sealer shall be heavy-duty type with single notch, side jaws, and handles at right angle to strapping. The sealer shall join two thicknesses of strapping by clinching and notching the applicable seals about the strapping.

3.1.3 Seal.

3.1.3.1 Type I kit. The seal for the 3/8 inch wide by 0.020-inch thick regular duty strapping shall conform to class R, finish B, grade 3, style I (open) of ASTM D3953.

3.1.3.2 Type II kit. The seal for the 1/2 inch wide by 0.020-inch thick regular duty strapping shall conform to class R, finish B, grade 3, style I (snap on or open) of ASTM D 3953.

3.1.3.3 Type III kit. The seal for the 5/8 inch wide by 0.020-inch thick regular duty strapping shall conform to class R, finish B, grade 2, style I (open) of ASTM D3953.

3.1.3.4 Type IV kit. The seal for the 3/4 inch wide by 0.020-inch thick regular duty strapping shall conform to class R, finish B, grade 2, style I (open) of ASTM D3953.

3.1.3.5 Type V kit. The seal for the 1-1/4 inch wide by 0.035-inch thick heavy-duty strapping shall conform to class H, finish B, grade 2, style II of ASTM D3953.

3.1.3.6 Type VI kit. The seal for the 2 inch wide by 0.050-inch thick heavy-duty strapping shall conform to class H, finish B, grade 2, style II of ASTM D3953.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

3.1.4 Steel strapping.

3.1.4.1 Type I kit. The steel strapping shall be 3/8-inch wide by 0.020-inch thick conforming to type I (flat), regular duty, finish B, grade 2 of ASTM D3953.

3.1.4.2 Type II kit. The steel strapping shall be 1/2-inch wide by 0.020-inch thick conforming to type I (flat), regular duty, finish B, grade 2 of ASTM D3953.

3.1.4.3 Type III kit. The steel strapping shall be 5/8-inch wide by 0.020-inch thick conforming to type I (flat), regular duty, finish B, grade 2 of ASTM D3953.

3.1.4.4 Type IV kit. The steel strapping shall be 3/4-inch wide by 0.020-inch thick conforming to type I (flat), regular duty, finish B, grade 2 of ASTM D3953.

3.1.4.5 Type V kit. The steel strapping shall be 1-1/4 inches wide by 0.035 inch thick conforming to type I (flat), heavy duty, finish B, grade 2 of ASTM D3953.

3.1.4.6 Type VI kit. The steel strapping shall be 2 inches wide by 0.050 inch thick conforming to type I (flat), heavy duty, finish B, grade 2 of ASTM D3953.

3.1.5 Cutter (types V and VI kits). The cutter shall be a hand-operated, heavy-duty type with a removable upper jaw blade, stationary blade and handles. The handle grip of the lower handle shall be offset to protect the operator's hand from being pinched while operating. The handles shall contain hand grips. The cutter shall be capable of cutting tightly-drawn steel strapping up to 1-1/4 inches wide by .035 inch thick for type V and 2 inches wide by .050 inch thick for type VI.

3.1.6 Box for kit components. The box for types I through VI kits shall be wood, of a size that will allow all components specified for each type (see table I) to fit inside the box with a minimum of movement within the box during handling and transport. The same size box may be used for types I through IV. Types V and VI boxes shall be larger to accommodate the wider strapping widths (1-1/4 inches for type V and 2 inches for type VI) and a cutter. All boxes shall be nailed, have a hinged cover with hasp, contain metal straps and wood cleats, and be designed to contain the steel strapping and sealing kit components.

3.2 Operating instructions. Instructions covering the operation of the sealer and stretcher shall be furnished with each kit.

3.3 Marking. Each kit box shall be marked on the inside of the cover. The markings shall include kit type and contents (including strapping size and seal count). The operating instructions shall also be securely attached to the inside of the cover. The outside front of the box shall also be marked with the following information; NSN, type, strapping size, cage number, and contractor. All characters shall be black, a minimum of 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:08Z
Check the source to verify that this is the currentversion before use.

3.4 Workmanship. The finished strapping and sealing kit components shall be free of sharp edges, splits, slivers or projections.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of ASTM E 380, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. REGULATORY REQUIREMENTS

4 .1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance, prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 200 units meeting this CID, in the commercial or government marketplace over the past 5 years.

6. PACKAGING

6.1 Packaging. Preservation, packing and marking requirements shall be as specified in the contract or purchase order (see 7.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1. Ordering Data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable):

a. Title, number and date of this CID
b. Type of kit required (see 2.1)
c. Preservation, packing and marking required (see 6.1)

7.2 Sources for referenced documents.

7.2.1 Government documents. Copies of military and federal documents are available from the Standardization Documents Order Desk, Building 4, Section D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

A-A-52211 - Stretchers, Steel Strapping, Hand

7.2.2 Non-government documents.

ASTM STANDARDS:

D 3953 - Strapping, Flat Steel and Seals
E 380 - Use of the International System of Units (the Modernized Metric System)

(Application for copies of ASTM standards should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959).

7.3 National Stock Numbers (NSN).

7.3.1 Kit type. The following NSNs are assigned to the types of kits covered by this CID:

Type	NSN
I	3540-00-565-6240
II	3540-00-565-6241
III	3540-00-565-6242
IV	3540-00-565-6243
V	3540-00-565-6244
VI	3540-00-591-2758

7.3.2 Kit boxes. The following NSNs are assigned to the kit boxes used with the kits:


	NSN
Types I - IV kits	3540-00-897-5516
Type V kit	3540-00-897-8117
Type VI kit	3540-00-897-8118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

7.4 Sources of supply. A manufacturer whose products are known to meet the requirements of this CID is listed below; however, competition is not limited to this company.

Independent Metal Strap Co., Inc.
34 Lumber Road
Rosalyn, NY 11576-2106

7.5 Part Identification Number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor:

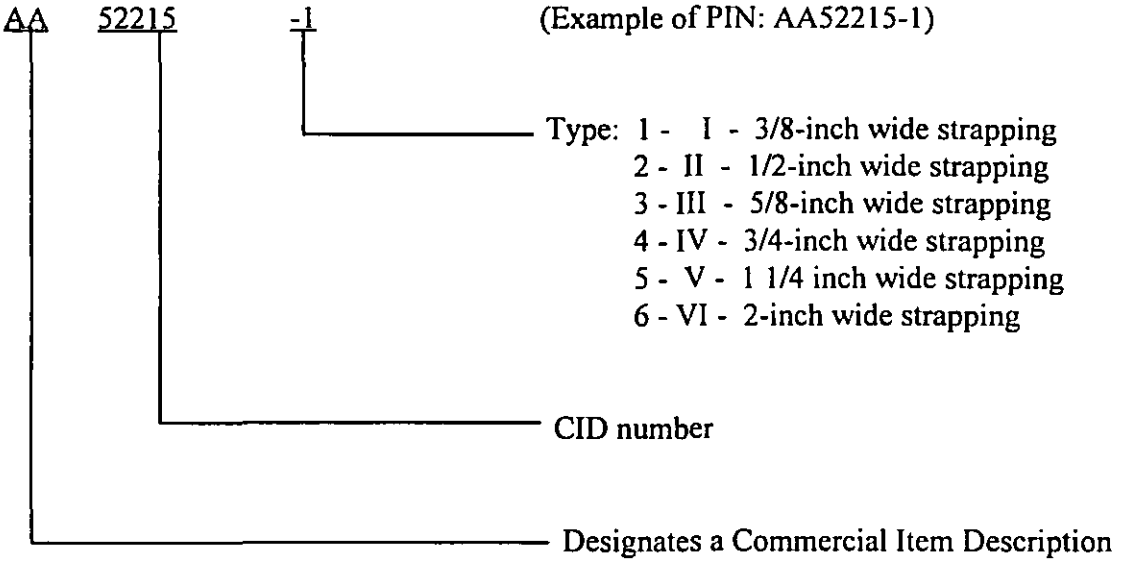

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD1, SM
Navy - AS, CG, MC, YD1
Air Force - 03, 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY:

Army - GL

Project 3540-0160

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52215	January 7, 1997

3. DOCUMENT TITLE
Strapping and Sealing Kits, Hand-Operated

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U.S. Army Natick RD&E Center.	508-233-5175	256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SSCNC-WEF Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-03-26 08:08:32
Check the source to verify that this is the current version before use.