INCH-POUND

A-A-52299B
22 July 2004
SUPERSEDING
A-A-52299A
29 August 1999

COMMERICAL ITEM DESCRIPTION
LEVELS, SURVEYING: LOCATOR'S, HAND-TYPE

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies. The original issue of this CID replaced GG-L-261D.

1. SCOPE.

1.1 Abstract. This commercial item description covers hand held, surveying levels used for line of sight determination of relative elevation.

2. CLASSIFICATION:

2.1 Type. The hand levels shall be of the following types as specified (see 6.2):

Type I – Non-telescoping.

Type II – Telescoping (draw tube).

3. SALIENT CHARACTERISTICS.

3.1 Construction. The hand level, regardless of type, shall have the following characteristics:

a. A tubular body with an objective lens at one end and at the other, a removable eyepiece suitably sealed to preclude the entry of dust into the instrument.

b. Horizontal and vertical cross hairs for use in determining the exact target intercept and vertical orientation of the level.

c. An integral focusing arrangement to accommodate the individual eye.

d. A permanently mounted instrument level to indicate when the line of sight is horizontal.

e. A mechanism that shall project the image or readout of the level indicator magnified 4x to one side of the field of view.

f. A lanyard to suspend the instrument from the user's neck.

Comments, suggestions, or questions on this document should be addressed to: U.S. ARMY TOPOGRAPHIC ENGINEERING CENTER, ATTN: CEERD-TS-T, 7701 TELEGRAPH ROAD, ALEXANDRIA, VA 22315-3864 or emailed to pd-te@tec.army.mil . Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil .

FSC 6675

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

3.2 Configuration. The levels shall be constructed in accordance with the following:

a. Type I. The tubular body shall be non-telescoping, with no magnification of the field of view. The overall length of the level shall not be greater than 6.5 inches.

b. Type II. The tubular body shall telescope, to afford a 2X magnification of the field of view. With the telescoping portion fully retracted, the overall length of the level shall not be greater than 6.5 inches.

3.3 Level indicator. The instrument level indicator shall be accurate to within a ± 0.25 percent gradient from horizontal and shall maintain this accuracy in normal use, handling, and storage for the life of the instrument.

3.4 Carrying case. A carrying case, to fit and protect the instrument, shall be provided with each level. The case shall have a securable closure and a loop(s) compatible with a belt 3.00 inches wide. The carrying case shall be fungus resistant.

4. REGULATORY REQUIREMENTS.

4.1 Recycled, recovered, or environmentally preferable materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Market acceptability. The levels offered shall be the latest version of the standard product of the supplier, that has been used in the field for at least one year by commercial organizations.

5.2 Product conformance. The levels offered shall meet the salient characteristics of this CID, conform to the manufacture’s drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.3 Examination. The levels shall be examined for compliance with requirements specified in Section 2. Each element of inspection shall encompass all examinations of performance and dimensional requirements. Failure to comply with any specified requirement, or the presence of one or more defects lessening required capabilities, shall constitute cause for rejection.

6. PACKAGING.

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order (see 7.2)

7. NOTES

7.1 Intended use. The levels are intended to be used to determine approximate differences in elevation, between points a short distance apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.

b. Type of level required (see 2.1).

c. Level of preservation and packing required (se 6.1).

7.3 Data requirements. The contracting officer should include, in the contract or order, requirements for instructional material and other documentation normally supplied with the level when sold on the commercial market.

7.4 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.This example describes a part numbering system for CID A-A-52299B

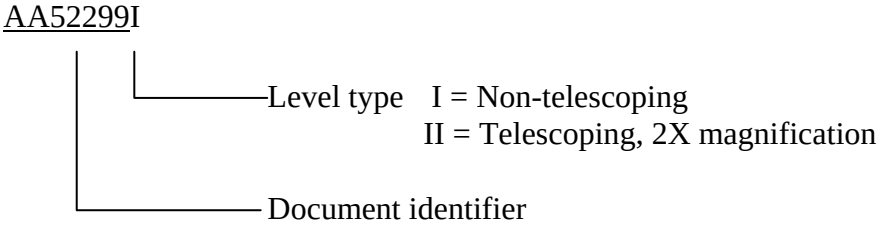

7.5 National Stock Numbers (NSN's). The following NSN is assigned to a product that conforms to this CID: 6675-00-880-1820. This may not be indicative of all possible NSNs associated with the CID.

7.6 Subject term (key word) listing.

Measure, plane
Optics
Telescoping
Transit

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

The preparing activity for this document is: The U.S. Army Topographic Engineering Center, 7701 Telegraph Road, Alexandria, VA 22315-3864.

Custodian:
Army - CE3
Air force - 99
DLA – IS
Navy – YD

Review activities:
Army - CR
Navy - MC

Civil Review Agency:
GSA - FSS

Preparing activity:
Army - CE3
(Project 6675-0168)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.