INCH-POUND

MIL-DTL-32054B
w/AMENDMENT 1
18 February 2022
SUPERSEDING
MIL-DTL-32054B
26 January 2012

DETAIL SPECIFICATION

MOUNTING MT-1995/A
FOR USE WITH COAXIAL TYPE SA-521A/A
RADIO FREQUENCY TRANSMISSION LINE SWITCH

This specification is approved for use by all Departments and
Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the mounting device used in conjunction with radio frequency (RF) switch Type SA-521A/A (see MIL-DTL-25879).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-25879	-	Switch, Radio Frequency Transmission Line, Coaxial Type SA-521A/A.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202	-	Electronic and Electrical Component Parts.
MIL-STD-202-101	-	Salt Atmosphere (Corrosion).
MIL-STD-202-103	-	Humidity (Steady State).
MIL-STD-202-107	-	Thermal Shock.
MIL-STD-202-213	-	Shock (Specified Pulse).
MIL-STD-202-214	-	Random Vibration.

(Copies of these documents are available online at https://assist.dla.mil.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

Comments, suggestions or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to Tubesamps@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

AEROSPACE INDUSTRIES ASSOCIATION (AIA)

AIA/NAS NASM20426 - Rivet, Solid, Countersunk 100 Precision Head, Aluminum and Titanium Columbium Alloy.

(Copies are available online at http://www.aia-aerospace.org/.)

ASTM INTERNATIONAL (ASTM)

ASTM-B108/B108M - Aluminum-Alloy Permanent Mold Castings.

(Copies may be purchased online at http://astm.org or from ASTM INTERNATIONAL.)

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)

ISO/IEC 17025 - General Requirements for the Competence of Testing and Calibration Laboratories.

(Copies are available online at http://www.iso.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article approval. Mountings furnished under this specification shall be products that meet requirements for first article approval (see 4.4 and 6.3). The mounting MT-1995/A and the switch SA-521A/A (see MIL-DTL-25879), shall be first article approved together and at the same time (see figure 1).

3.1.1 Materials. Materials shall be used that will enable the mounting to meet the requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product (see 4.2). The mounting MT-1995/A shall be aluminum alloy casting in accordance with ASTM-B108/B108M, alloy 356, temper T6, or equivalent, as determined by the acquiring activity.

3.1.1.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined as metal specimens that are in contact or otherwise electrically connected to each other in a conductive solution and that generate an electric current.

3.1.1.2 Fungus. Materials used in the construction of mountings shall be fungus inert. Fungus inert material is defined as a material which, in all modified states and grades, is not a nutrient to fungi.

3.1.1.3 Finish. The mounting MT-1995/A, except the bottom surface of the mounting, shall be anodized. For guidance on finishes see 6.5.

3.1.1.4 Pure tin. The use of pure tin as an underplate or final finish is prohibited both internally and externally. Tin content of the mounting device components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass (see 6.7).

3.1.2 Maintainability. Mounting provisions shall ensure that a minimal amount of maintenance time and effort is required for removal and replacement, using standard tools only.

3.2 Design and construction. The mounting MT-1995/A outline and dimensions shall be consistent with figure 1.

3.2.1 Drawings and procedures. The original design and construction drawings and production procedures as approved by first article testing shall remain available for inspection by the cognizant government inspector. No changes or waivers shall be allowed without approval of the acquiring activity (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

3.2.2 General. Any military specification, standard, or handbook referred to in this specification may be replaced by an equivalent commercial standard as determined by the acquiring activity (see 6.3).

3.2.3 Mounting provisions. The mounting MT-1995/A shall mate with the R.F. switch SA-521A/A (see MIL-DTL-25879). Positive electrical continuity between the switch unit and the individual fasteners shall be assured.

3.2.4 Retention devices. All screws and other hardware shall be adequately equipped with retaining devices to prevent loosening from vibration or shock over the life of the mounting.

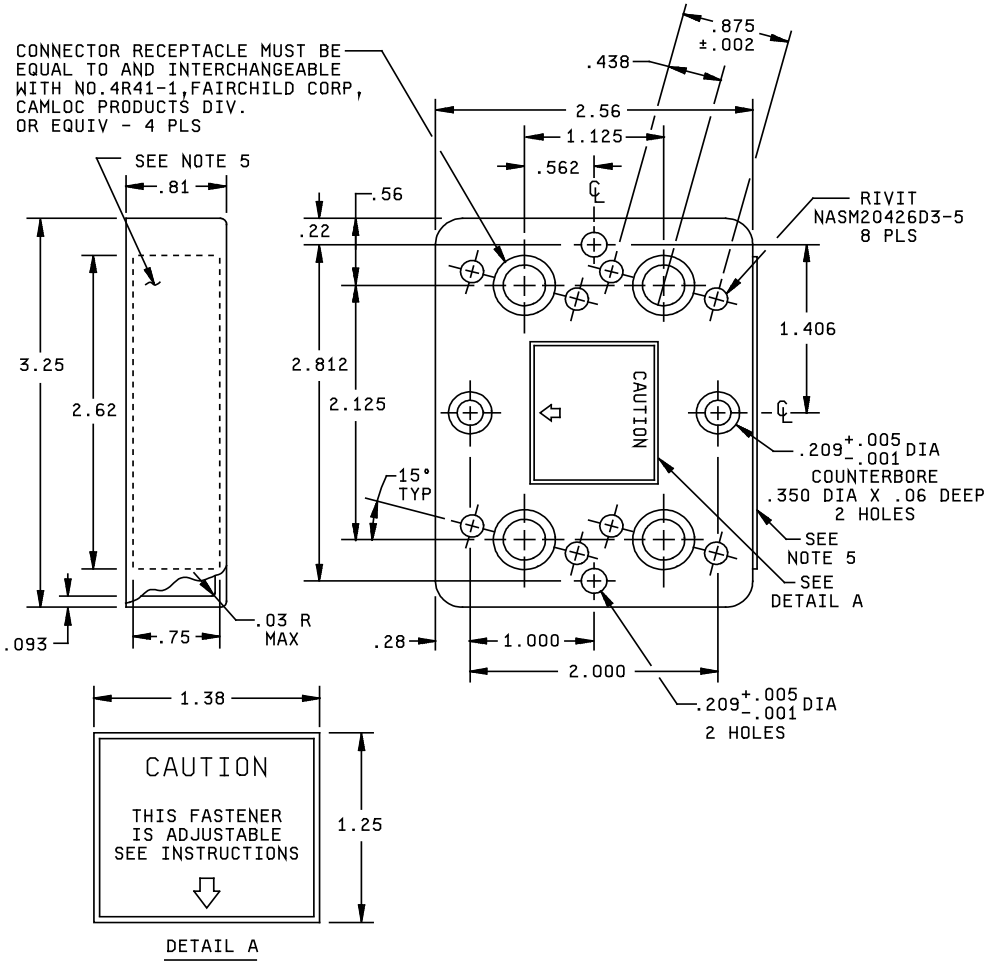


FIGURE 1. Outline and dimensions for mounting MT-1995/A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.001	.02	.350	8.89	1.25	31.75
.002	.05	.438	11.12	1.38	35.05
.003	.08	.56	14.22	1.406	35.71
.03	.76	.562	14.27	2.000	50.80
.06	1.52	.75	19.05	2.125	53.98
.093	2.36	.81	20.57	2.56	65.02
.209	5.31	.875	22.22	2.62	66.55
.22	5.59	1.000	25.40	2.812	71.42
.28	7.11	1.125	28.58	3.25	82.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only.
3. Unless otherwise specified, tolerances are .010 inch (0.25 mm) for three place decimals and ±.03 inch (0.76 mm) for two place decimals.
4. Except as shown, inside radii shall be .19 inch (4.83 mm) maximum.
5. The following instructions are to be printed in .06 inch (1.52 mm) high letters: "One quarter turn left releases the fastener. To fasten, push in, turn left and test to right for unrestricted quarter turn. If resistance is felt, turn more to the left, turn right to engage and tighten."

FIGURE 1. Outline and dimensions for mounting MT-1995/A. Continued

3.2.5 Weight. The weight of the mounting shall not exceed 8 ounces.

3.3 Environmental requirements. The mounting shall not degrade or deteriorate due to environmental test exposure that the mounting experiences during environmental testing with an associated switch. The mounting shall in no way contribute to switch failure or switch degradation during environmental tests.

3.3.1 Thermal shock. When tested as specified in 4.7.2, the mounting shall exhibit no evidence of deterioration or degradation.

3.3.2 Shock. When tested as specified in 4.7.3, the mounting shall exhibit no evidence of deterioration or degradation.

3.3.3 Random vibration. When tested as specified in 4.7.4, the mounting shall exhibit no evidence of deterioration or degradation.

3.3.4 Humidity. When tested as specified in 4.7.5, the mounting shall exhibit no evidence of deterioration or degradation.

3.3.5 Salt atmosphere. When tested as specified in 4.7.6, the mounting shall exhibit no evidence of deterioration or degradation.

3.3.6 Reliability. When tested as specified in 4.7.7, the mounting shall exhibit no evidence of deterioration or degradation.

3.4 Marking (see 3.1). Mountings shall be marked in a legible and permanent manner with the following information. Minimum marking shall include the following:

a. Part or Identifying Number (PIN): MT-1995/A.

b. Contract number: As assigned by acquiring agency.

c. Manufacturer CAGE code.

The marking shall remain legible after completing all environmental tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

3.5 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.6 Workmanship. Mountings shall be manufactured and processed in a careful and workmanlike manner, in accordance with good design and sound engineering practice, and to requirements of this specification. For guidance on workmanship see 6.6.

4. VERIFICATION

4.1 Classification of inspections. The inspections specified herein are classified as follows:

a. Materials inspection (see 4.2).

b. First article inspection (see 4.4).

c. Conformance inspection (see 4.5).

4.2 Materials inspection. Materials inspection shall consist of certification supported by verifying data (see 6.3) that the materials used in fabricating the mountings are in accordance with the applicable specifications or requirements listed in table I prior to such fabrication.

TABLE I. Materials inspection.

Material	Requirement paragraph
Dissimilar metals	3.1.1.1
Fungus	3.1.1.2
Finish	3.1.1.3

4.3 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the test conditions specified in the "GENERAL REQUIREMENTS" of MIL-STD-202.

4.4 First article inspection (see 3.1). First article inspection shall be performed at a laboratory acceptable to the Government (see 6.3) on sample units produced with equipment and procedures normally used in production. First article approval inspection of mountings shall be conducted together and at the same time as first article approval inspection of associated switch samples.

4.4.1 Sample size. Twelve mountings shall be subjected to first article inspection tests specified herein.

4.4.2.1 Inspection routine (see 3.3). The sample shall be subjected to the inspections specified in table II, in the order shown. All sample units shall be subjected to the inspections of group I. The sample shall then be divided into two groups of six units each. The sample units shall then be subjected only to the inspections indicated for their particular group.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

TABLE II. First article inspection.

Examination or test	Requirement paragraph	Test paragraph
Group I (all samples)		
Visual, mechanical and environmental	3.2, 3.3	4.7.1
Marking	3.4	4.7.1
Workmanship	3.6	4.7.1
Weight	3.2.5	4.7.1
Thermal shock	3.3.1	4.7.2
Humidity	3.3.4	4.7.5
Salt atmosphere	3.3.5	4.7.6
Group II (6 samples)		
Shock	3.3.2	4.7.3
Random vibration	3.3.3	4.7.4
Group III (6 samples)		
Reliability	3.3.6	4.7.7

4.4.3 Failures. No failures shall be allowed for first article inspection; a failure shall be anything that does not meet the requirements of the specification.

4.5 Conformance inspection.

4.5.1 Inspection of product for delivery. Inspection of product for delivery shall consist of group A.

4.5.1.1 Inspection lot. An inspection lot shall consist of all mountings produced under essentially the same conditions, and offered for inspection at one time. The lot size shall not exceed 200.

4.5.1.2 Group A inspection. Group A inspection shall consist of the examination and tests specified in table III, in the order shown.

4.5.1.2.1 Inspection plans. This specification utilizes an accept on zero defect (c = 0) sampling plan. Sampling shall be in accordance with table III. Sample categories indicated in table III shall be cross referenced to the appropriate sample sizes in table IV.

TABLE III. Group A inspection.

Examination or test	Requirement paragraph	Test paragraph	Sample category
Subgroup I			
Visual and mechanical a	3.2	4.7.1	A
Marking	3.4	4.7.1	B
Workmanship	3.6	4.7.1	B
Weight	3.2.5	4.7.1	A
Subgroup II			
Reliability	3.3.6	4.7.7	1/

1/ Monthly sample size shall be a minimum of three per lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

TABLE IV. Sampling plans.

Sample category	Sample size		
Lot size	A	B	C
2 to 8	All	All	All
9 to 15	All	All	All
16 to 25	All	16	All
26 to 50	All	20	26
51 to 90	All	20	32
91 to 150	All	20	32
151 to 200	All	20	32

4.5.1.3 Rejected lots. If an inspection lot is rejected, the supplier may rework it to correct the defects, or screen out the defective units, and resubmit for re-inspection. Resubmitted lots shall be inspected using sample size C in accordance with table IV in place of sample size B for group A inspection until at least three consecutive lots have passed. Such lots shall be clearly separate from new lots, and shall be clearly identified as re-inspected lots.

4.5.1.4 Disposition of sample units. Sample units which have been subjected to group A, subgroup II inspection shall not be delivered on the contract or purchase order.

4.5.2 Group B inspection. Group B inspection shall consist of the tests specified in table V, in the order shown. Group B inspection shall be made on sample units which have passed group A subgroup I inspection. Except where the results of these inspections show noncompliance with the applicable requirements, delivery of products which have passed group A shall not be delayed pending the results of these verification inspections.

TABLE V. Group B inspection. 1/

Test	Requirement paragraph	Test paragraph
Thermal shock	3.3.1	4.7.2
Random vibration	3.3.3	4.7.4
Shock	3.3.2	4.7.3

1/ Inspection shall be performed on a sample of 6 units. No failures shall be allowed. A sample unit having one or more defects shall be considered as a single failure.

4.5.2.1 Post tests. The manufacturer, at his option, need not perform post test examination after each environmental test as referenced in 3.3 until after all environmental tests are complete. Requirements for each post test must be met at this time.

4.5.2.2 Failures. If there are any failures, the sample shall be considered to have failed.

4.5.2.3 Disposition of sample units. Sample units which have been subjected to group B inspection shall not be delivered on the contract or purchase order.

4.6 Test equipment and inspection facilities. Test and measuring equipment and inspection facilities of sufficient accuracy, quality, and quantity to permit performance of the required inspection shall be established and maintained by the supplier. The establishment and maintenance of a calibrated system to control the accuracy of the measuring and test equipment shall be in accordance with ISO/IEC 17025.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

4.7 Methods of examination and test.

4.7.1 Visual and mechanical examination (see 3.1.1, 3.1.1.1, 3.1.1.3, 3.2, 3.2.3, 3.2.4, 3.2.5, 3.3, 3.4, 3.6). Mountings shall be examined to verify that the materials, size, mounting, retention of devices, weight, design, construction, finish, marking, and workmanship are in accordance with the applicable requirements. For guidance on finishes, refer to 6.5 through 6.5.2. Following environmental testing, the mounting shall exhibit no evidence of deterioration or degradation.

4.7.2 Thermal shock (see 3.3.1). The mounting shall be tested in accordance with method MIL-STD-202-107 test condition A, except the minimum temperature shall be -40°C. At the conclusion of the test, the mounting shall be removed from the test chamber; returned to standard temperatures; and within a period of one hour, examined visually.

4.7.3 Shock (see 3.3.2). The mounting shall be tested in accordance with method MIL-STD-202-213, test condition J. The test pulse duration shall be 11 ms. There shall be no visible evidence of loosening of parts.

4.7.4 Random vibration (see 3.3.3). The mounting shall be tested in accordance with method MIL-STD-202-214, test condition I, letter A. The test duration shall be specified as 1.5 hours.

4.7.5 Humidity (see 3.3.4). The mounting shall be tested in accordance with method MIL-STD-202-103, test condition A. After completion of the test, visual inspection shall show no signs of visible deterioration.

4.7.6 Salt atmosphere (see 3.3.5). The mounting shall be tested in accordance with method MIL-STD-202-101, test condition A.

4.7.7 Reliability (see 3.3.6). Reliability testing shall be in accordance with the manufacturer's reliability assurance program, with the following temperature range: -54°C to +85°C.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The mounting MT-1995/A covered by this specification is intended for use with coaxial type SA-521A/A radio frequency transmission line switch.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. Part number: The mounting should normally be ordered separately from the switch.

6.3 First article approval. Information pertaining to first article inspection and approval of products covered by this specification should be obtained from the acquiring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

6.4 Subject term (key word) listing.
Aluminum-alloy
Anodized
Castings
Dissimilar metals
Finish

6.5 Finish.

6.5.1 Chemical conversion coating. Based on past experience, treatment of aluminum in accordance with MIL-DTL-5541, class 3, has been used successfully to meet the requirements of this specification.

6.5.2 Anodized finish. Based on past experience, mounts anodized in accordance with MIL-PRF-8625, type II, have been used successfully to meet the requirements of this specification.

6.6 Workmanship.

6.6.1 Cleaning. After fabrication, the mounting should be cleaned of smudges; weld metal; metal chips and mold release agents; or any other foreign material which might detract from intended operation, function, or appearance of the mounting.

6.6.2 Threaded parts or devices. Screws, nuts and bolts should show no evidence of cross threading, mutilation, or detrimental or hazardous burrs, and should be firmly secured.

6.7 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers (see 3.1.1.4). For additional information on this matter, refer to ASTM-B545 (Standard Specification for Electrodeposited Coatings of Tin).

6.8 Amendment notations. The margins of this specification are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC
(Project 5985-2022-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.