INCH-POUND
MIL-PRF-32052/3(CR)
7 December 1999

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED, BB-XX80/U

This specification sheet is approved for use by the U. S. Army CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-32052.

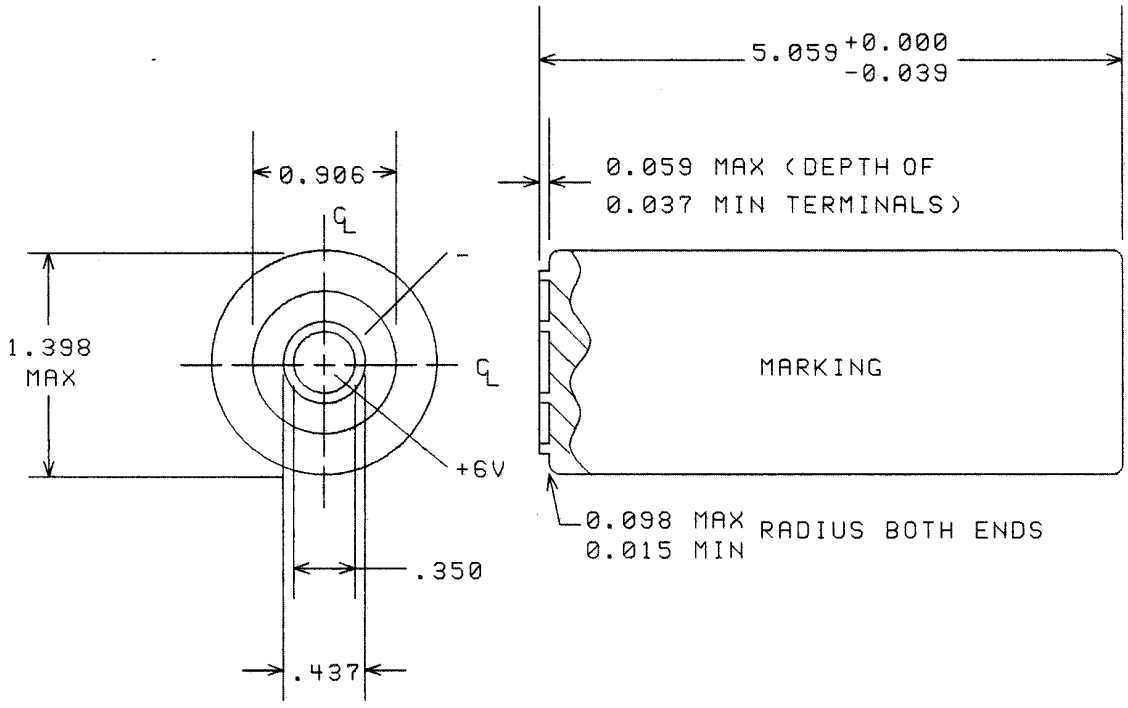

Figure 1. Battery dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. The tolerance shall be ±0.004 inch unless otherwise specified.

2. The battery case shall be fabricated in such a way as to allow cell venting upon provocation without rupture.

3. Electrical terminal contacts are 0.01 inches thick.
4. Stencil (or equivalent) schematic, identification and charging instructions as shown..5. Manufacturer must fill in applicable information in parenthesis. Location optional.

6. Pressure relief valve location is optional. It shall release gas before case damage is incurred. It shall not permit the entry of liquid into the battery case.

7. This battery shall contain a device that prevents reverse currents in excess of C/10 rate from discharge terminal. A separate charge terminals in the opposite side of the discharge terminal is recommended.

8. Distinctive markings are required, dependent upon chemistry.

9. State of charge indicator location is optional. State of charge interpretation shall be clearly marked on the battery.

REQUIREMENTS:

Dimensions and configuration: See figure 1 .

Rated capacity (C/2): 3.0 AH.

Voltage (Nominal): 6.0 volts.

Maximum Voltage: 8.2 volts.

Weight (Maximum): 9.2 OZ (260 grams)

Charge rate for testing and on battery (C/2 for 2-3 hrs) : 1.5 amps minimum or when permitted, per 4.7.1.2

All connectors, including socket terminal and charging connector, if required, shall retain full function after 500 insertions and 500 withdrawals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

Discharge Rates	Final Voltage(V)	Current (Amps/ Watts)
C/5	4.0	0.72 Amps
C_5	4.0	4.0 Amps
$0.5C_5$	4.0	2.0 Amps

Test	Discharge Rate	Capacity Requirement (AH)
Full Capacity Discharge	2 amperes	3.5 AH
Cycle Life, 224 cycles	2 amperes	3.1 AH
Overcharge, 24 hours	2 amperes	3.5 AH
High Rate Discharge	4 amperes	2.7 AH
High Temp Capacity, 50°C	2 amperes	3.5 AH
Low Temperature Discharge at -20°C (18°C)	2 amperes	2.5 AH
Retention of Charge 7 days at 50°C (122°C)	2 amperes	3.0 AH
Vibration	0.72 amperes	3.7 AH

Notes: 1. Unless otherwise specified, all values are minimum.
2. All charges and discharges shall be performed on fully assembled batteries through the terminals.
3. All the discharge currents are fixed at the specific rate regardless the rated capacity of the battery.

CONCLUDING MATERIAL:

Custodian:
Army- CR

Preparing Activity:
Army – CR

(Project 6140-A913-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.