INCH-POUND
MIL-PRF-32052/4(CR)
7 December 1999

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED BB-XX47/U and BB-X847/U

This specification sheet is approved for use by the U. S. Army CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-32052.

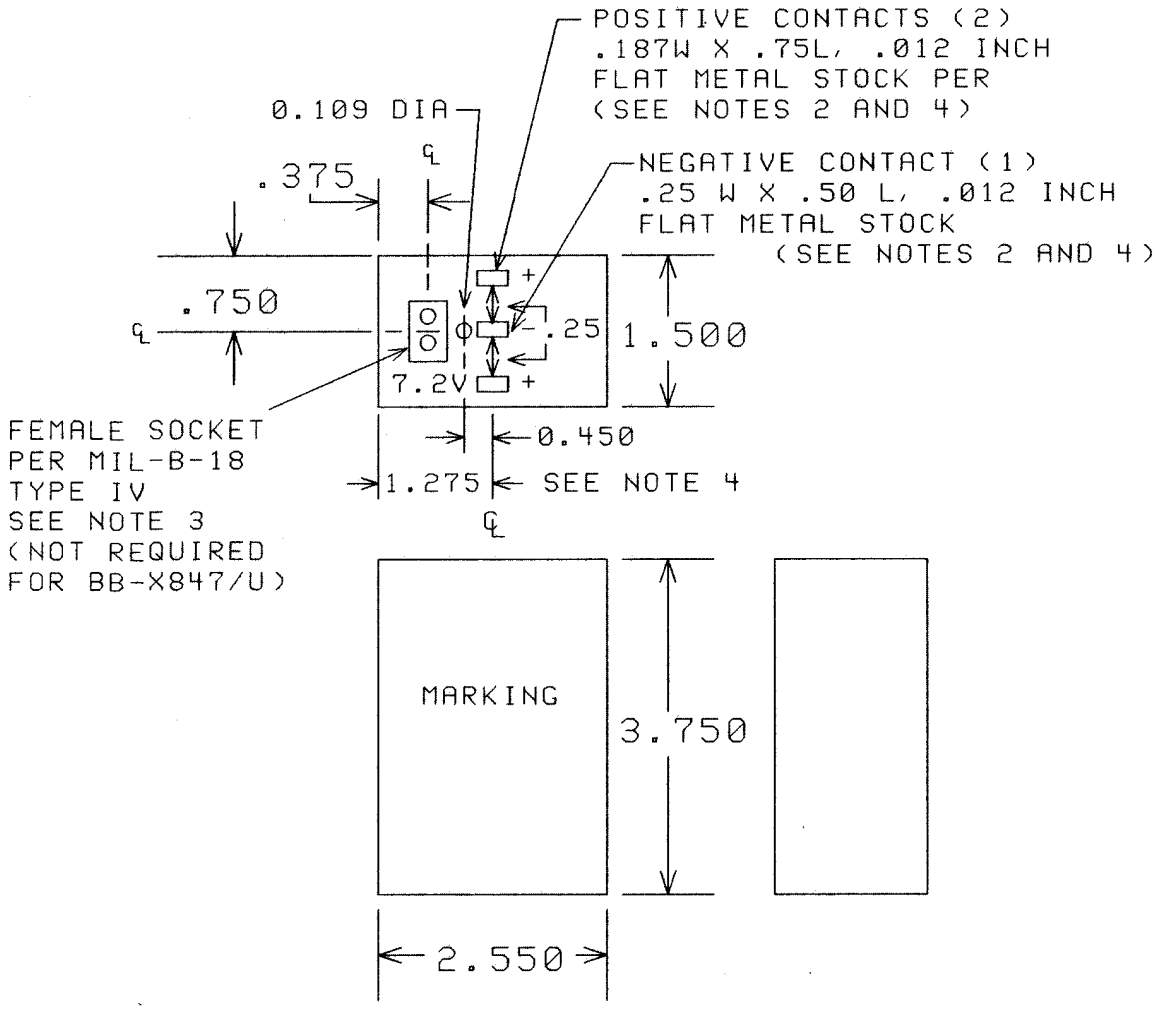

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. The tolerance shall be ±0.031 inch unless otherwise specified.

2. The dual connectors shall be wired in a parallel 6 volt circuit. The dual connector is not required for the BB-X847/U configuration.

3. Type IV socket:

    a. Pin circle center shall be on the battery center line.

    b. Minimum depth of the socket well shall be 5/8 inch.

    c. Shall float 1/32 inch in all directions from the pin circle center.

4. Flat contacts:

    a. The center negative contact shall be on both battery center lines.

    b. Shall be supported and mounted so that the top surface shall not protrude above the outside surface of the battery jacket.

    c. Shall not be more than 1/8 inch below the outside surface of the battery jacket initially, during, and after contact is made with mating contact springs.

    d. Shall not have a lateral displacement of more than 1/32 inch during mating with contact springs.

5. Stencil (or equivalent) schematic, identification and charging instructions as shown..

6. Face of connector and the socket connector shall be flush to .031 inch below top of battery.

7. Manufacturer must fill in applicable information in parenthesis. Location is optional.

8. Pressure relief valve shall be located under connector. It shall release gas before case damage is incurred. It shall not permit the entry of liquid into the battery case.

9. All connectors included Type IV socket and Flat contacts connectors shall retain full function after 500 insertions and 500 withdrawals.

10. Distinctive markings are required, dependent upon battery chemistry.

11. State of charge indicator shall be located on the top face of the battery. State of charge interpretation shall be clearly marked on the battery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and 2.

Rated capacity (C/5): 4.0 AH.

Voltage (Nominal): 7.2 Volts.

Maximum voltage: 8.2 Volts.

Weight (Maximum):
BB-XX47/U: 16.2 OZ (460 grams)
BB-X847/U: 18.0 OZ (511 grams)

Connector:
Dual Terminals: Two (2) hole female socket per MIL-B-18, Type IV; three flat contacts as per Figure 1.

Charge rate for testing
and on battery (C/2 for 2-3 hrs) : 2.0 amps minimum.
or when permitted, per 4.7.1.2

Discharge Rates	Final Voltage(V)	Current (Amps/ Watts)
-----	4.0	3.0 Watts
C/5	4.0	0.72 Amps
----	4.0	10 Watts
----	4.0	14.0 watts
$2C_5$	4.0	8.0 Amps

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

Test	Discharge Rate	BB-XX47/U Capacity Requirement (AH/ WH)	BB-X847/U Capacity Requirement (AH/ WH)
Full Capacity Discharge	10 watts	28 WH	41 WH
Cycle Life, 224 cycles	10 watts	25 WH	35 WH
Overcharge, 24 hours	10 watts	28 WH	41 WH
High Rate Discharge	8 amps	3.3 AH	5.2 AH
High Temp Capacity, 50 °C	14 Watts	19 WH	27 WH
Low Temperature Discharge at -20°C (-18°F) for BB-XX47 and -30°C for BB-X847	10 watts	15.6 WH	25 WH
Retention of Charge 7 days at 50°C (122°F)	10 watts	25.0 WH	36.0 WH
Intermittent Load		23 WH	33 WH
2.9 Minutes	10 watts		
7.1 Minutes	3 watts		
Vibration	0.72 amp	4.5 AH	5.7 AH

NOTES -
1. Unless otherwise specified, all values are minimum.
2. All charges and discharges shall be performed on fully assembled batteries through the terminals.
3. All the discharge current are fixed at the specific rate regardless the rated capacity of the battery.

CONCLUDING MATERIAL:

CUSTODIAN:
Army-CR

PREPARING ACTIVITY:
Army-CR

(PROJECT 6140-A913-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.