PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED, BB-XX16/U

This specification sheet is approved for use by the U. S. Army CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-32052.

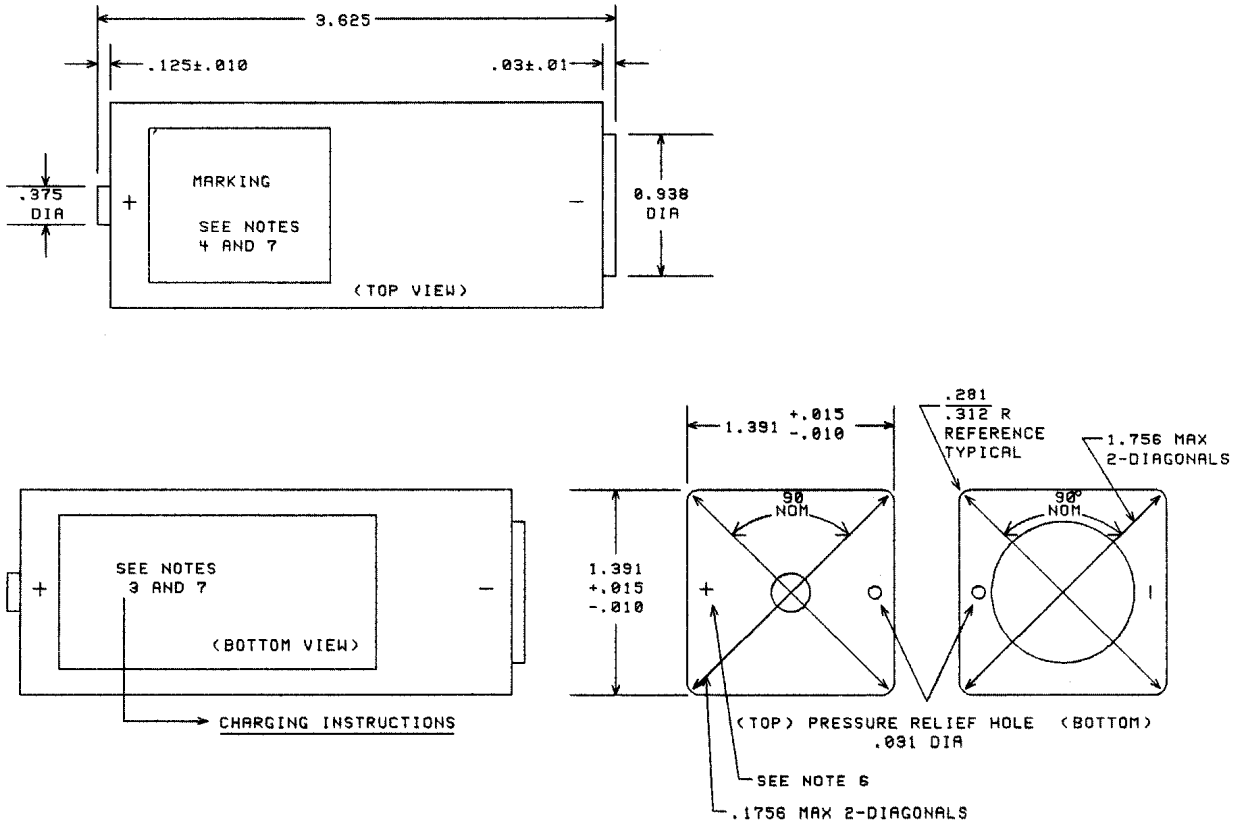

FIGURE 1. BATTERY DIMENSIONS AND LABELS.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Rated capacity (C/5): 0.44 AH.
Voltage (nominal): 24 volts.
Maximum voltage: 32.8 volts.
Weight (maximum): 0.27 kg (0.59 lbs).
Terminals: 2 each nickel, flat surface.
Charge rate for testing and on battery (C/2 for 2-3 hrs): 0.22 amps.

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
C/5	-	20.0	0.045
$0.5C_5$	-	20.0	0.20
$2C_5$	22.0	20.0	0.80
$4C_5$	-	20.0	1.60

Test	Discharge Current (amps)	Capacity Requirement (AH)
Full Capacity Discharge	0.20	0.35
Cycle Life, 224 cycles	0.20	0.30
Overcharge, 24 hours	0.20	0.35
High Rate Discharge	0.80	0.25
Low Temperature Discharge at -30°C (-22°F)	0.20	0.10
Retention of Charge 7 days at 50°C (122°F)	0.20	0.15
Pulse Discharge 1.6 amps, 5 seconds on, 25 seconds off, continuously to 20 volts	1.60	0.20
Vibration	0.045	0.40

Mounting screws for connector: Not applicable.

Terminal markings: The positive terminal marking may be painted red. The negative terminal may be painted black.

Terminal: The two terminals shall be low resistance flat contacts of nickel.

Electrical leakage: Not applicable.

Immersion: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

DRAWING AND SPECIFICATION NOTES

1. Except as noted, all values are minimum. All discharge currents are fixed regardless the discharge capacity.

2. All charges and discharges shall be performed on fully assembled batteries through the terminals.

3. Charging instructions shall be provided on a label which will be attached to side of the battery opposite ID label.

4. Identification label shall include complete label information required in specification. It shall be located as shown on drawing and surface shall be designated as top of battery. If necessary, adjacent side may contain continuation of label content.

5. Dimensions are in inches and unless otherwise specified decimal tolerances are $\pm$0.031 in.

6. Symbol "+" on this surface; "-" on opposite end.

7. Labels may be an integral part of the container provided marking is permanent and clear or labels shall be separate, made of KOH resistant, non-metallic, material with permanent and clear marking.

8. Additional marking may be required, dependent upon chemistry.

9. The diagonals for top and bottom views are 1.756 inches maximum. Diagonals shall not exceed 1.756 inch maximum along the length of battery before or after testing or discharge.

10. The state of charge indicator may be placed on any face of the battery. State of charge interpretation shall be clearly marked on the battery.

CONCLUDING MATERIAL:

Custodian:
Army - CR

Preparing Activity:
Army - CR

(Project 6140-A913-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.