INCH-POUND
MIL-PRF-32052/7(CR)
7 December 1999

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED, BB-XX57/U

This specification sheet is approved for use by the U. S. Army CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-32052.

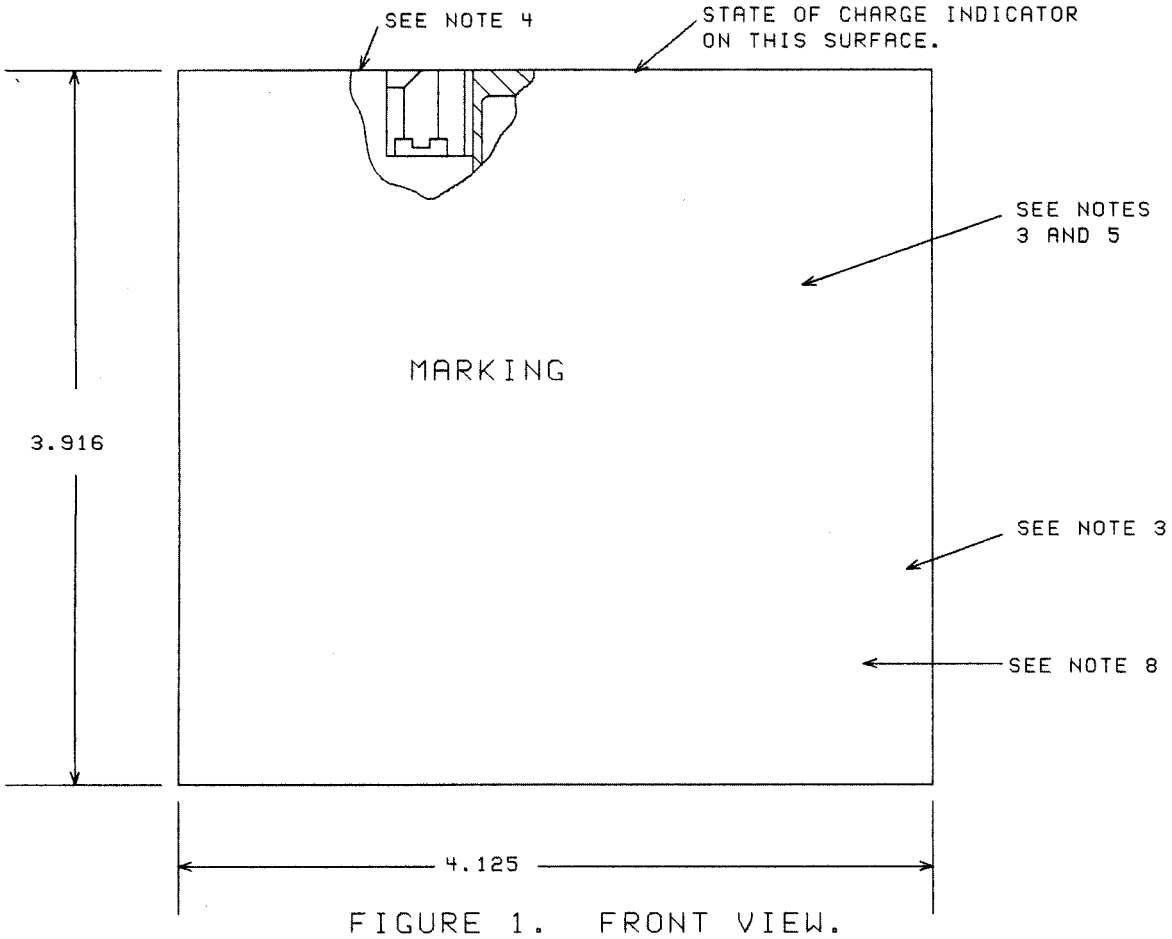

FIGURE 1. FRONT VIEW.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

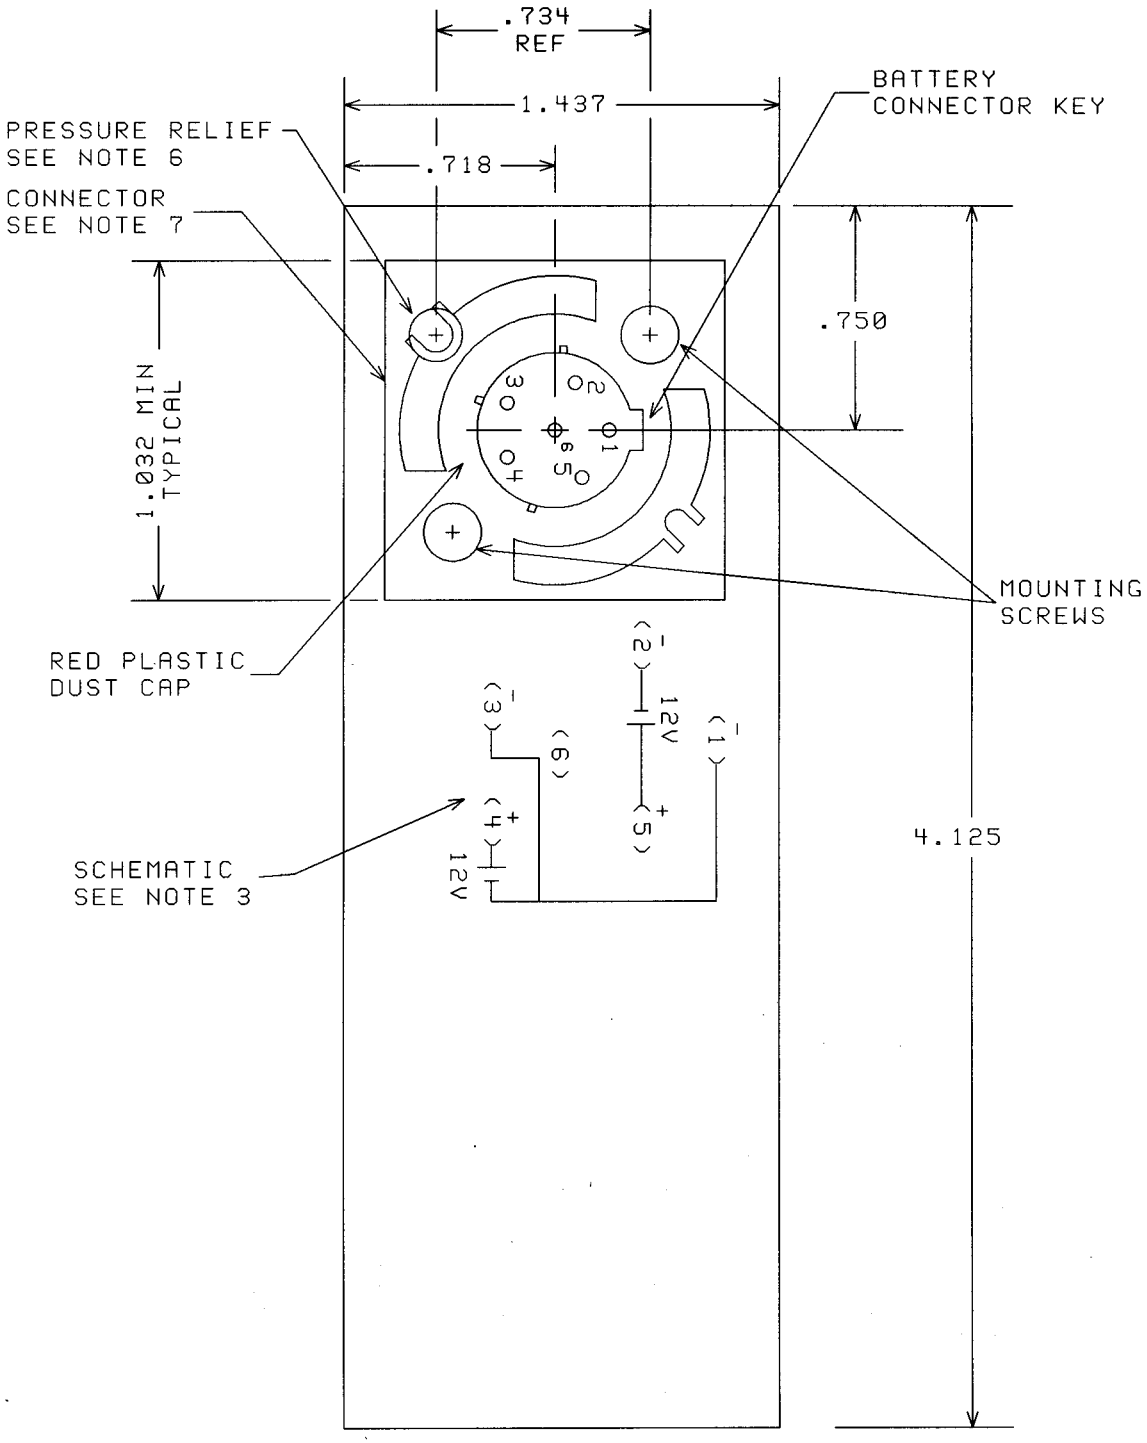

FIGURE 2. TOP VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

DRAWING NOTES

1. All dimensions are in inches.

2. Tolerance on decimals: ± 0.031 inch.

3. Stencil (or equivalent) schematic, identification and charging instructions as shown.

4. Face of connector shall be flush to 0.031 inch below top of battery.

5. Manufacturer shall fill in applicable information in parenthesis.

6. Pressure relief valve shall be located under connector. It shall release gas before case damage is incurred. It shall not permit the entry of liquid into the battery case.

7. The main connector key shall be oriented as shown in Figure 2. The two connector mounting screws shall be corrosion resistant material. Connectors, which are dimensionally equivalent to the SC-C-179495 and will not cause a reduction in battery performance or life are acceptable.

8. Additional bands may be required, dependent upon battery chemistry.

9. State of charge interpretation shall be clearly marked on the battery.

REQUIREMENTS:

Rated capacity (C/5): 2.0 AH.

Voltage (Nominal): 12/24 volts.

Maximum Voltage:
32.8 volts for 24 volt mode
16.4 volts for 12 volt mode

Weight (Maximum): 0.60 Kg (1.3 lbs).

Connector: Floating type per SC-C-179495 or equivalent.

All connectors, including socket terminal and charging connector, if required, shall retain full function after 500 insertions and withdrawals.

Connector mounting screws shall remain securely fastened after 500 insertions and withdrawals.

Charge rate for testing
and on battery: C/2 minimum for 2-3 hrs or with approved charger
(or when permitted per para. 4.7.1.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
0.14C	-	20.0	0.2
$0.7C_5$	-	20.0	1.0
$2.1C_5$	22.0	20.0	3.0
$3.5C_5$	-	10.0	10.0

Test	FIXED Discharge Current (amps)	Capacity Requirement(AH)
Full Capacity Discharge	1.0	1.40
Cycle Life, 224 cycles:	1.0	1.26
Overcharge, 24 hours:	1.0	1.40
High Rate Discharge:	3.0	1.00
Low Temperature Discharge at -30°C (-22°F):	1.0	0.50
Retention of Charge 7 days at 50°C (122°F):	1.0	1.20
Pulse Discharge, 10 amps, 5 seconds on, 25 seconds off, continuously to 10 volts	10.0	2.00
Vibration	0.2	1.50

NOTES - 1. Unless otherwise specified, all values are minimum.
2. All charges and discharges shall be performed on fully assembled batteries through the terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL:

Custodian:
Army - CR

Preparing Activity:
Army - CR

(Project 6140-A913-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:29Z
Check the source to verify that this is the current version before use.