PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED, BB-XX88/U and BB-388/U

This specification sheet is approved for use by the U. S. Army CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-32052.

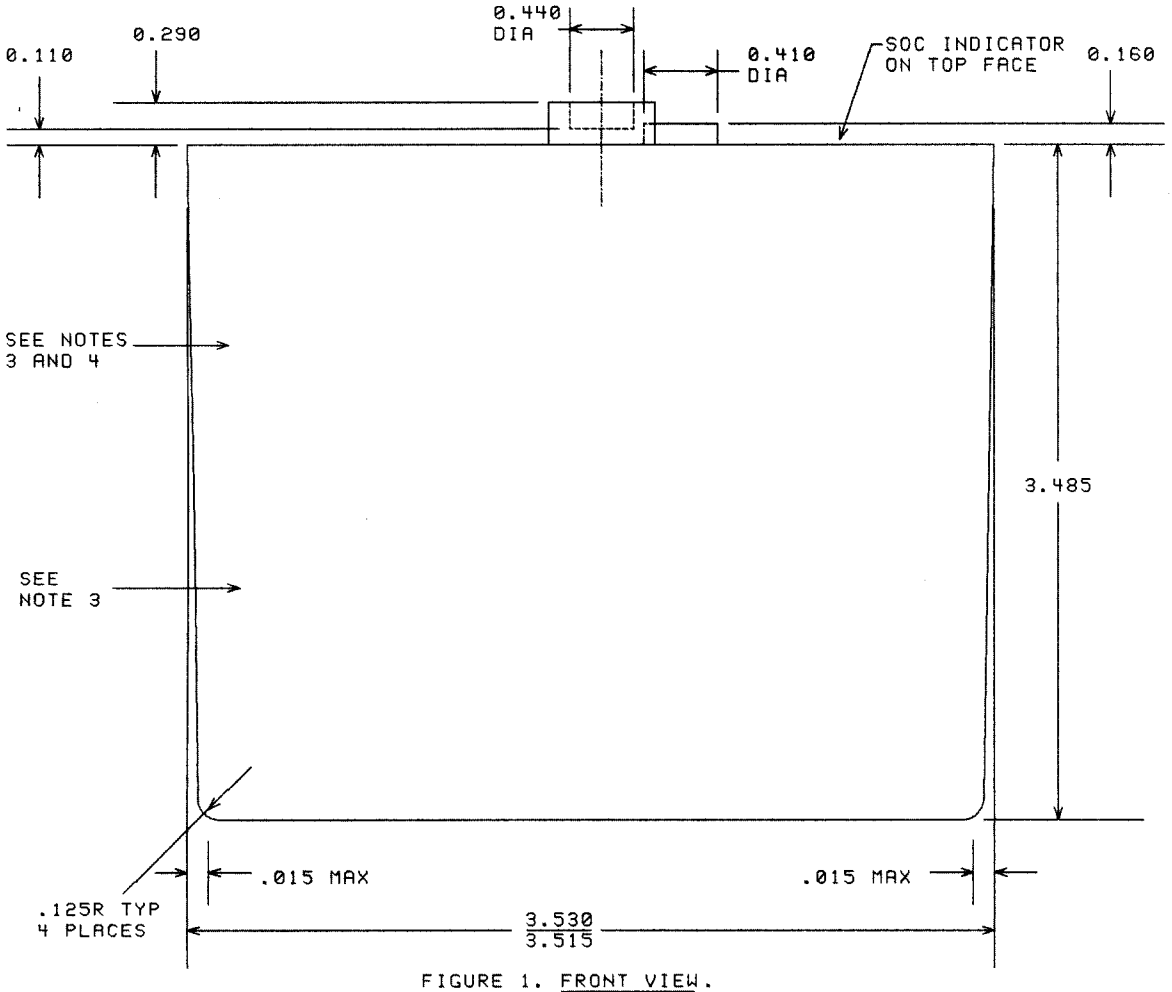


FIGURE 1. FRONT VIEW.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

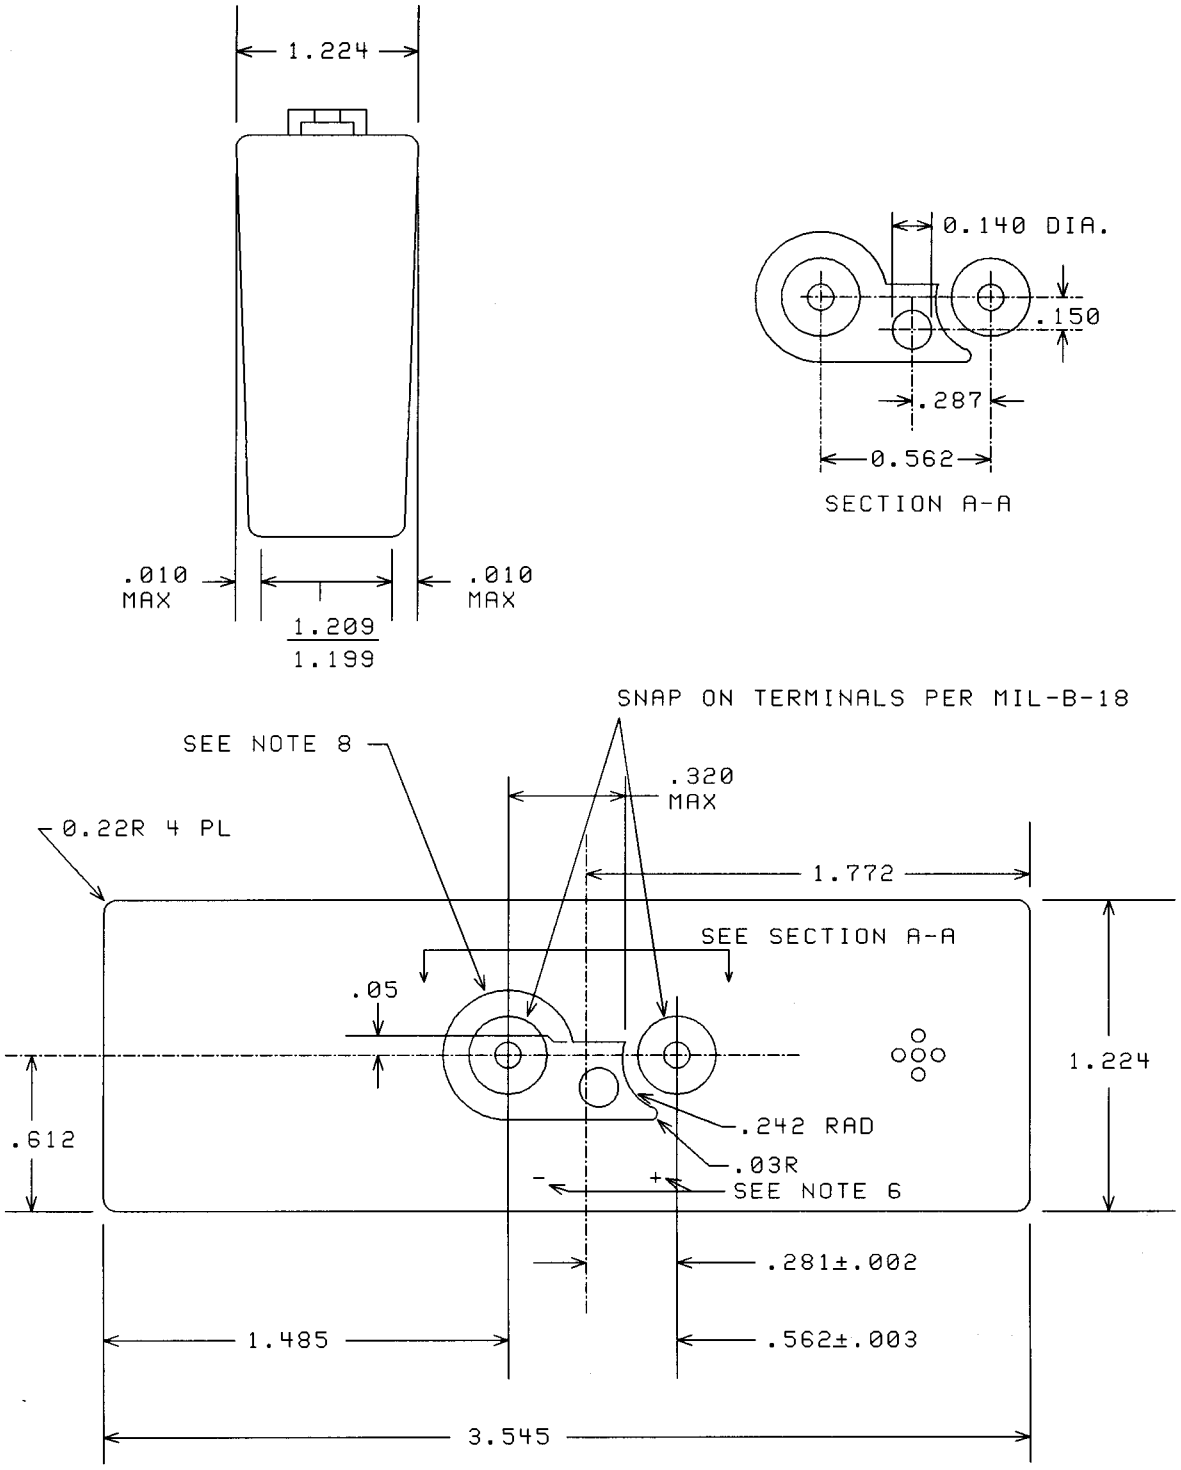


FIGURE 2. TOP AND SIDE VIEW OF BB-(XX)88/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

DRAWING NOTES:

1. All dimensions are in inches.

2. Tolerances on decimals: ±0.015 inch, unless otherwise specified.

3. Stencil (or equivalent) identification and charging instructions as shown. Color marking white for Nickel metal hydride, yellow for lithium ion battery.

4. Manufacturer must fill in applicable information in parenthesis.

5. Pressure relief mechanism typical location. It shall release gas before case damage is incurred.

6. Terminal marking shall be embossed or impressed. Positive terminal marking shall be colored red.

7. Plastic shield around negative terminal to prevent connection of two (2) batteries together.

8. A vent cover which will allow the escape of gas (using the same type and color material as the case) shall be affixed in place when using a screw type vent valve. Vent valve shall not be removable by user.

9. Distinctive markings shall be required, dependent upon battery chemistry.

10. State of charge interpretation shall be clearly marked on the battery.

REQUIREMENTS:

Rated capacity (C/5): 1.5 AH.

Voltage (Nominal): 13.2 Volts.

Maximum Voltage: 16.4 Volts.

Weight (Maximum):
BB-XX88/U: 0.34 Kg (0.75 lb.)
BB-388/U: 0.45 Kg (1.0 lb).

Connector: Snap type per MIL-B-18.

All connectors, including socket terminal and charging connector, if required, shall retain full function after 500 insertions and withdrawals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

Charge rate for testing
and on battery (C/2 for 2-3 hrs): 0.750 amps minimum .
(or when permitted, per 4.7.1.2)

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
C/5	-	11.0	0.2
C_5	-	11.0	1.0
2 C_5	12.1	11.0	3.0

Test	Current (amperes)	Capacity Requirement (AH)	
		BB-XX88/U	BB-388/U
Full Capacity Discharge	1.0	1.80	1.50
Cycle Life, 224 cycles	1.0	1.60	1.20
Overcharge, 24 hours	1.0	1.80	1.50
High Rate Discharge	3.0	1.40	1.20
Low Temperature Discharge at -20°C (-4° F)	1.0	1.40	1.00
Retention of Charge 7 days at 50°C (122°F)	1.0	1.35	0.57
Pulse Discharge			
5 minutes on	1.0	1..80	1.50
5 minutes off	0		
Vibration	C/5	2.0	1.50

NOTES - 1. Unless otherwise specified, all values are minimum.
2. All charges and discharges shall be performed on fully assembled batteries through the terminals.
3. Electrical leakage : Not applicable.
4. All the discharge rate are fixed current regardless the capacity of the battery.

REQUIREMENTS:

Mounting screws for connector: Not applicable.

Connector: Battery connector shall be snap type terminal per MIL-B-18 which shall be capable of withstanding a minimum of 500 coupling and uncoupling with charging cable with no breakage, distortion or loss of electrical performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.

Connector shield: A plastic shield shall be put around the negative terminal to prevent two BB-XX88/U batteries from being joined together at the snap type terminal.

Electrical leakage: Not applicable.

High rate pulse: Not applicable

CONCLUDING MATERIAL:

Custodian:
Army - CR

Preparing Activity:
Army - CR

(Project 6140-A913-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:30Z
Check the source to verify that this is the current version before use.