INCH-POUND

MIL-PRF-32058C(USAF)
12 JUN 2026

SUPERSEDING
MIL-PRF-32058B(USAF)
w/AMENDMENT 1
28 AUG 2017

# PERFORMANCE SPECIFICATION

# CHOCK, WHEEL-TRACK - AVIATION, ADJUSTABLE ROPE TYPE

Comments, suggestions, or questions on this document should be addressed to AFLCMC/EZSS, Bldg 28, 2145 Monahan Way, Wright-Patterson AFB OH 45433-7017 or emailed to engineering.standards@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A

FSC 1730

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for aviation wheel-track chocks of the adjustable rope type.

1.2 Classification. The chocks are of the following types, sizes, and classes (see 6.2).

1.2.1 Types. The chock types are as follows:

Type I - Made of a material whose physical properties meets or exceeds those listed in Table I.

**Table I. Physical properties.**

| Property | ASTM Method | Value |
|---|---|---|
| Specific Gravity | D-792 | 1.04 |
| Shore Hardness | D-2240 | 94A/45D |
| Taber Abrasion | D3489 | 200 mg loss |
| | H-18 Wheel 1,000-g Load, 1,000 | |
| Tensile Strength at Break | D-412 | 2,400 $lb/in^2$ |
| Flexural Modulus | D-790 | 16,000 $lb/in^2$ |
| Tear Strength, Die C | D-624 | 450 $lb_f/in$ |
| Thermal Coefficient of Linear Thermal Expansion | D-696 | 78E-06 in/in/°F |

Type II - Not Used.

1.2.2 Size. Chock sizes are as follows:

Size 1, Size 2, Size 3, Size 4, and Size 5 as shown in Table II.

1.2.3 Class. The chock classes are as follows:

Class A - For use in dry, wet and ice-free weather conditions.


Class B - Not Used.

Class C - For Use in All Weather Conditions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

1.3 Part or identifying number (PIN). PINs to be used for wheel chock assemblies acquired to this specification are created as follows:

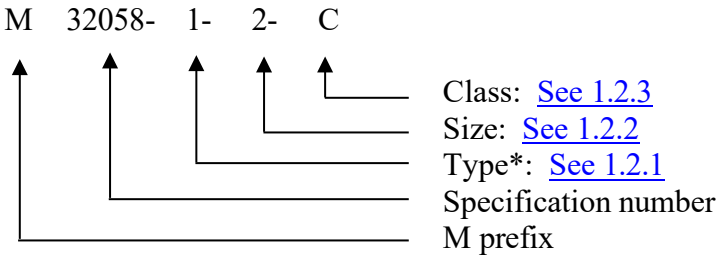


Note: * "Type" designation in the PIN are numerical.

## 2. APPLICABLE PUBLICATIONS

2.1 General. The publications listed in this section are specified in Sections 3 and 4 of this specification. This section does not include publications cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, users of this document are cautioned that they must meet all specified requirements of publications cited in Sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government publications.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

| | |
|---|---|
| A-A-52088 | Rope, Cotton, or Cotton/Polyester Blend |

DEPARTMENT OF DEFENSE SPECIFICATIONS

| | |
|---|---|
| MIL-STD-810 | Environmental Engineering Considerations and Laboratory Tests |
| MIL-PRF-5606 | Hydraulic Fluid, Petroleum Base; Aircraft, Missile and Ordnance |
| MIL-DTL-5624 | Turbine Fuel, Aviation, Grades JP-4 and JP-5 |
| MIL-PRF-6083 | Hydraulic Fluid, Petroleum Base, For Preservation and Operation |
| MIL-DTL-83133 | Turbine Fuel, Aviation, Kerosene Type, JP-8 (NATO F-34), NATO F-35, and JP-8+100 (NATO F-37) |
| MIL-PRF-83282 | Hydraulic Fluid, Fire Resistant, Synthetic Hydrocarbon Base, Metric, NATO Code Number H-537 |
| MIL-PRF-87257 | Hydraulic Fluid, Fire Resistant; Low Temperature, Synthetic Hydrocarbon Base, Aircraft and |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE HANDBOOKS

| | |
|---|---|
| MIL-HDBK-808 | Finish, Protective and Codes for Finishing Schemes for Ground and Ground Support and Equipment |

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. The following other Government publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

AIR FORCE DRAWINGS

| | |
|---|---|
| 42D6594 | Chock Assembly-Wheel, Adjustable Rope Type |
| 202432090 | Chock Assembly- Size 1 Honeycomb |
| 202432091 | Chock Assembly- Size 2 Honeycomb |
| 202432300 | Size 4 Honeycomb, Wheel Chock |
| 202432092 | Chock Assembly- Size 5 Honeycomb |

(Copies of these drawings are available online at https://a-team.us.af.mil/login, for users with approved access rights granted through the All-purpose Tool for Engineering, Analytics, and Management (A-TEAM). Users not located on a *.mil network may contact the A-TEAM Help Desk via email at wralc.tila.centra@us.af.mil for instructions on obtaining and completing the necessary forms.)

2.3 Non-Government publications. The following publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

| | |
|---|---|
| ASTM D1655 | Standard Specification for Aviation Turbine Fuels |
| ASTM D5340 | Standard Test Method for Airport Pavement Condition Index Surveys |

(Copies of these documents are available online at https://www.astm.org.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

| | |
|---|---|
| SAE AMS-STD-595 | Colors Used in Government Procurement |
| SAE AMS1424 | Deicing/Anti-Icing Fluid, Aircraft, SAE Type I SAE AMS-STD-595 Colors Used in Government Procurement |

(Copies of these documents are available online at https://www.sae.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

## 3. REQUIREMENTS

3.1 First article. When specified (see 6.2), four sample(s) (two pairs) shall be subjected to first article inspection in accordance with 4.2.

3.2 Description. A pair of wheel chock assemblies are required to be secured around an aircraft's wheel and keep it stationary in the environmental conditions specified herein.

3.3 Size and weight. Chocks (synonymous with chock assemblies) shall be as light as possible while meeting all requirements of this specification. Maximum weight of a chock shall not exceed 45lbs. In order for the chocks and lanyards to properly interface with military aircraft landing gear the size measurements shall be as specified in Table II.

**Table II. Chock sizes.**

| Size | Chock Length (in.) * | Minimum Chock Height (in.) * | Minimum Chock Width (in.)* | Lanyard Length (in.)* | Wheel and Tire Assembly Outside Diameter (in.) |
|---|---|---|---|---|---|
| 1 | 14 | 4 | 6 | 60 | Up to 33 |
| 2 | 20 | 6 | 8 | 92 | Greater than 33 |
| 3 | 24 | 4 | 6 | 60 | Up to 33 |
| 4 | 24 | 8 | 8 | 92 | Greater than 33 |
| 5 | 56 | 6 | 8 | 144 | For dual or tandem main gear |
| Note: * Tolerances for dimensions are +0.5/-0.5 inches. | | | | | |

3.4 Components. The chock assembly shall consist of a single chock block and a lanyard.

3.5 Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's materials specification for wheel chocks. All materials shall be selected based on the defined purpose for the specified service life at the environmental extremes specified herein. The use of recovered material made in compliance with regulatory requirements is acceptable providing all requirements of this specification are met.

3.5.1 Materials for Type I chock. The material for chocks shall be any material whose properties meet or exceed those of Table I.

3.5.2 Prohibited materials. Materials which may cause sparks, break apart, become contaminated with or have its structural integrity compromised by aircraft fluids are prohibited and shall not be used.

3.5.3 Fungus proof materials. Materials that are nutrients for fungi shall not be used.

3.5.4 Protective treatment. Coatings subject to failure at the extremes specified herein shall not be used.

3.6 Design and construction. A pair of chock assemblies coupled together in accordance with the aircraft specific technical order shall hold the aircraft at the environmental extremes specified herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

3.6.1 Foreign Object Damage (FOD). Any component that must be removed for inspection, service, or operation shall be retained by wire rope lanyard or chain preventing it from becoming separated from the chock.

3.6.2 Finish. The chock and all components shall be constructed and finished in a workmanlike manner. Particular attention shall be given to elimination of sharp edges, splinters, and burrs, surface preparation, and finish. Chock shall be finished in accordance with MIL-HDBK-808.

3.6.3 Color. The chock block shall be color 13591, yellow, as specified in SAE AMS-STD-595, or commercial equivalent. If it is impractical to make the chock yellow, the chock shall be reflectorized. Chock color shall remain steadfast in the environmental conditions specified herein.

3.6.4 Lanyard. The lanyard shall be made from rope specified in A-A-52088.

3.6.5 Slippage. The bottom surface of chock block shall not slip on bare or wet ramp surface. Ramp surface shall be "good" as specified in ASTM D5340.

3.6.6 Buoyancy. The chock shall not float in water.

3.6.7 Compression. The chock shall withstand a minimum applied weight of 170 psi, with a minimum overall weight of 3,500 lbs. for at least 15 minutes.

3.6.8 Part or identifying number. The part or identifying number (see 1.3) shall be permanently and legibly marked on the lanyard end of the chock in 0.5-inch characters minimum. The use of adhesive labels and data plates is prohibited.

3.7 Durability. Chocks shall not require more than simple inspections to insure chock block is free of cracks, wear, and deformation and lanyard is secure, the proper length, and free of wear. Chocks shall withstand the rigors of routine impacts on concrete in normal daily conditions. Normal conditions are defined as between 0 and 120 °F, at any humidity. One person, in less than 30 minutes, shall be able to perform all daily inspections and service tasks, including, but not limited to, inspection for cracks, wear, deformation, and insuring rope is properly secured and of proper length.

3.8 Performance.

3.8.1 Environmental conditions.

a. Full time exposure to temperature ranging from -60 to 180 °F.

b. Full time exposure to relative humidity of 100%.

c. Full time exposure to UV light.

d. Precipitation as encountered in any locale in any season.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2)

b. Conformance inspection (see 4.3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

c. Operational test (see 4.7)

Requirements shall be verified in accordance with Table III.

**TABLE III. Requirement verification matrix.**

| Section 3 Requirement | Verification Method | Section 4 Verification |
|---|---|---|
| 3.1 First article. | Not Applicable (N/A) | |
| 3.2 Description. | N/A | |
| 3.3 Size and weight. | Examination | 4.6.2 Dimensional check.<br>4.6.3 Weight check. |
| 3.4 Components. | N/A | |
| 3.5 Materials. | N/A | |
| 3.5.1 Materials for Type I chock. | Examination | 4.6.1 Examination of product. |
| 3.5.2 Prohibited materials. | Examination | 4.6.1 Examination of product. |
| 3.5.3 Fungus proof materials. | Examination | 4.6.1 Examination of product. |
| 3.5.4 Protective treatment. | Examination | 4.6.1 Examination of product. |
| 3.6 Design and construction. | Examination | 4.6.1 Examination of product. |
| 3.6.1 Foreign object damage (FOD). | Examination | 4.6.1 Examination of product. |
| 3.6.2 Finish. | Examination | 4.6.1 Examination of product. |
| 3.6.3 Color. | Examination | 4.6.1 Examination of product. |
| 3.6.4 Lanyard. | Examination | 4.6.1 Examination of product. |
| 3.6.5 Slippage. | Examination | 4.6.1 Examination of product. |
| 3.6.6 Buoyancy. | Test | 4.6.4 Buoyancy test. |
| 3.6.7 Compression. | Test | 4.6.5 Compression test. |
| 3.6.8 Part or identifying number. | Examination | 4.6.1 Examination of product. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

**TABLE III. Requirement verification matrix – Continued.**

| Section 3 Requirement | Verification Method | Section 4 Verification |
|---|---|---|
| 3.7 Durability. | Examination | 4.6.5 Compression test.<br>4.6.6 Impact test. |
| 3.8 Performance. | N/A | |
| 3.8.1 Environmental conditions. | | 4.6.8.1 High temperature test.<br>4.6.8.2 Low temperature test. |

4.2 First article inspection. The first article chocks shall be subjected to the examination and tests described in 4.6.1 through 4.6.8.2. The contractor shall provide or arrange for all test equipment and facilities. Unless otherwise approved by the procuring activity, all first article chocks shall be in the same configuration at all times and configuration changes shall not be made during the first article inspection. The contractor shall include a statement of conformance certifying that the material properties of the chock material meet or exceed values listed in Table I.

4.3 Conformance inspection. Each production chock shall be subjected to the examination described in 4.6.1.

4.4 Test rejection criteria.

a. Failure or evidence of impending failure, permanent deformation, or wear beyond limits.

b. Conditions presenting a safety hazard to personnel during operation, service, or maintenance.

c. Failure to attain the specified performance requirements.

4.5 Rejection and retest. If a chock fails first article inspection, the chock will be considered rejected until the cause is determined and corrective action is taken, only then shall retest be accomplished.

4.6 Testing methods.

4.6.1 Examination of product. Each wheel chock shall be examined to verify compliance with the requirements herein prior to accomplishing any other demonstrations or tests listed in 4.6. A contractor-generated, Government-approved checklist (part of the test procedure) shall be used to identify each requirement not verified by an analysis, certification, demonstration, or test, and shall be used to document the examination results. Particular attention shall be given to materials, workmanship, dimensions, surface finishes, protective coatings and sealants and their application, welding, fastening, and markings. Proper operation of each wheel chock function shall be verified. Certifications and analyses shall be provided in accordance with Table III. Each production chock shall be inspected to a Government-approved reduced version of the checklist.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

4.6.2 Dimensional check. Dimensions for the wheel chock and lanyard shall be as specified in Table II.

4.6.3 Weight check. A single chock with lanyard shall be weighed and shall be as specified in 3.3.

4.6.4 Buoyancy test. The contractor shall demonstrate the chock is not buoyant in water. Any movement of the chock during test, indicating improper selection of materials or inadequate design, shall be cause for rejection. Test must also demonstrate chock does not absorb water. An increase in chock weight of more than 1% due to absorption of water shall be reason for rejection.

4.6.5 Compression test. The Contractor shall develop a test procedure to demonstrate that the chock will withstand a minimum applied weight of 170 psi, with a minimum overall weight of 3,500 lbs. for at least 15 minutes. The weight shall be uniformly distributed across the top-face of a portion of the chock; the maximum width of the distributed load shall be 17 inches. Any cracking or permanent deformation shall be cause for rejection. “Permanent deformation” shall be defined as an observable deformation of 0.063-inch or greater, compared to the as manufactured dimensions, 60 minutes ±5 minutes after any portion of the load has been removed.

4.6.6 Impact test. The Contractor shall develop a test procedure to demonstrate that a chock encountering an impact of at least 525 ft-lb against a surface equal to or greater than the hardness of concrete. The chock shall withstand 20 cycles. Any cracking, chipping, or permanent deformation shall be cause for rejection. “Permanent deformation” shall be defined as an observable deformation of 0.063-inch or greater, compared to the as-manufactured dimensions.

4.6.7 Contamination test. The Contractor shall develop a test procedure to demonstrate chock is resistant to and does not absorb MIL-PRF-6083, MIL-PRF-5606, MIL-PRF-83282, MIL-PRF-87257, MIL-DTL-5624, MIL-DTL-83133, ASTM D1655, SAE AMS1424 and Skydrol in accordance with MIL-STD-810, Method 504. Any absorption, discoloration, or deformation that results from a constant 24-hour exposure to these fluids shall be cause for rejection.

4.6.8 Environmental test.

4.6.8.1 High temperature test. Chock shall be heated to 180 °F for two hours, allowed to cool to 120 °F, and subjected to tests described in 4.6.5 and 4.6.6. Any evidence of discoloration, cracking, or permanent change in dimensions due to heating shall be cause for rejection.

4.6.8.2 Low temperature test. Chock shall be cooled to -60 °F, allowed to stabilize, and subjected to tests described in 4.6.5 and 4.6.6. Any evidence of cracking, increased brittleness, or permanent change in dimensions due to cooling shall be cause for rejection.

4.7 Operational test. All operational testing shall be satisfactorily completed and approved prior to final first article acceptance. The chocks shall be delivered to three Government designated sites for 90 days of operational use. The test period shall start after the chocks have been inspected and prepared for service and the contractor has reviewed the operation instruction and maintenance manuals with Government personnel. The chocks shall be used as often as possible in all environmental conditions. Government personnel at the beginning or end of the test period may conduct any test cited in this specification. Accumulated


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

operational hours may be used as a part of the Reliability analysis (see 3.7). Any failure preventing chocks from completing its operational testing period shall constitute a reliability failure.

4.8 Final inspection. Following all testing, the chocks and ropes shall be inspected for evidence of loose parts, cracks, deformation, finish failures, wear, part or identifying number legibility, and evidence of corrosion.

4.9 Workmanship. Construction and finish of the chock assembly shall give particular attention to neatness and thoroughness of surface preparation, finish, painting, and freedom of parts from burrs, splinters, and sharp edges.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

## 6. NOTES

(This section contains information of a general or explanatory nature which may be helpful but is not mandatory.)

6.1 Intended use. These wheel chocks are intended for use on a variety of aircraft under all environmental conditions on improved and unimproved runway and parking surfaces. The adjustable rope is used to connect or lace the chocks together in front and back of each tire to hold the chocks in place preventing aircraft movement.

6.2 Acquisition requirements. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Type, Size, and Class (see 1.2).

c. When first article is required (see 3.1).

d. Applicable levels of preservation, packaging, and packing (see 5.1).

e. Part or identifying number (see 1.3).

6.3 Subject term (key word) listing.

ACFT ground equipment
ACFT loose equipment
ACFT parking
ACFT safety
Ground safety
Wheel chocks



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.

6.4 Working example. Air Force drawing 42D6594 may be referenced for dimensional guidance.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

MILITARY INTEREST:

Custodians:
Air Force - 184

Preparing Activity:
Air Force - 184

Reviewer:
Navy - AS
DLA - CC

(Project 1730-2026-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:31Z
Check the source to verify that this is the current version before use.