INCH POUND
MIL-PRF-32062(AR)
15 March 2000

PERFORMANCE SPECIFICATION

Case, Carrying for M198/M119 Fire Control Optics

This specification is approved for use by the U.S. Army Armament Research, Development and Engineering Center, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification is for a type of carrying case, designated as Case, Carrying for M198/M119 Fire Control Optics (See 6.1).

1.2 Classification. Items covered by this specification should be of the following:

Type I – Carrying Case, Fire Control for M198

Type II – Carrying Case, Fire Control for M119

2. APPLICABLE DOCUMENTS.

2.1 General. The documents listed in this section are specified in Sections 3 and 4 of this specification. This does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all the requirements as cited in Section 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army TACOM-ARDEC, ATTN: AMSTA-AR-QAW-E, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC:1240
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

A-A-59136	Packaging Material, Plank

STANDARDS

FEDERAL

FED-STD-595	Colors Used in Government Procurement

DEPARTMENT OF DEFENSE

MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1916	DoD Preferred Methods for Acceptance of Product

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094 or http://assist.daps.mil/online/login/login.cfm.)

.

2.2.2 Other Government documents. The following other Government documents, drawings, and publications, form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation.

DRAWINGS

US ARMY ARMAMENTS RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11731008	- Plate
12994172	- Plate

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

12994171 - Insert, Cover
12994170 - Insert, Body
12994169 - Insert, Cover
12994168 - Insert, Body
12994167 - Plate

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the U.S. Army TACOM-ARDEC, AMSTA-AR-QAD, Picatinny Arsenal, NJ 07806-5000)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), in the contract, a sample shall be subjected to first article inspection in accordance with 4.1.

3.2 Design, materials, and manufacturing processes. Unless otherwise specified, the design, materials, and manufacturing process selection is the prerogative of the contractor as long as all articles submitted to the Government fully meet the functional and operating requirements specified.

3.3 Operating requirements. Each carrying case shall provide the following functional, operational, and performance capabilities.

3.3.1 Color. The carrying case shall be a uniformly non-reflective forest green color, chip #34079 of FED-STD-595.

3.3.2 Ease of use. All types of cases shall have the following features to accommodate user needs:

a. A means of releasing internal pressure (by a person wearing MOPP IV gloves) to allow ease of opening following changes in altitude.

b. One handle on the top (latch side) of the case to enable ease of stowage and removal from the rack on the howitzer, as well as ease in transport by a single person wearing cold weather protective gloves.

c. Closures shall ensure ease in opening and closing by a

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

single person wearing cold weather protective gloves, while providing sufficient force to meet sealing requirements.

d. The cover and lid shall be connected with a hinge to allow easy removal and placement of items in case. Top and bottom of case must remain attached when opened.

3.3.3 Marking. Each carrying case shall have the markings respective to the part number specified in the solicitation as indicated in Table I. The markings shall be externally applied by any method commonly used by the contractor in contrasting colors relative to the background color. The case and markings shall not become discolored, degraded, or illegible throughout all phases of the verification testing. The “ID MARKINGS” letter height shall be a minimum of 1.0 inches and located across the flat of the cover. Identification of the case cover shall be designated by arrows and “UP” to identify the orientation of the case.

Table I. Marking requirements

DESCRIPTION	TYPE I	TYPE II
ID MARKINGS	CASE, CARRYING P/N – MIL-PRF-32062, TYPE I	CASE, CARRYING P/N – MIL-PRF-32062, TYPE II

3.4 Interface requirements. Each carrying case shall meet the following requirements.

3.4.1 Weight. The carrying case shall weigh no more than 20 pounds.

3.4.2 Physical dimensions.

3.4.2.1 Type I. The carrying case shall have minimum outside dimensions of 20.0 inches in width by 8.5 inches in height by 20.0 inches in length and maximum outside dimensions of 20.38 inches width by 8.7 inches height by 21.0 inches in length.

3.4.2.2 Type II. The carrying case shall have minimum outside dimensions of 20.0 inches in width by 8.5 inches in height by 20.0 inches in length and maximum outside dimensions of 25.0 inches width by 11.0 inches height by 25.0 inches in length.

3.4.3 Cushion inserts. The inside dimensions of the carrying case shall accommodate the cushion inserts for each type case in the locations shown on the respective figure. The outside dimensions of the cushions shall be consistent with the inside dimensions of the case to ensure a tight fit in the case shell. The cushioning material shall conform to A-A-59136,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

Packaging Material, Sheet, and the applicable drawing requirements. The cushions must be secured to the interior of the case by means commonly utilized by the contractor which will resist removal by pulling.

a. Type I: Insert, Cover 12994171
Insert, Body 12994170
Location Figure 1

b. Type II: Insert, Cover 12994169
Insert, Body 12994168
Location Figure 2

3.4.4 Identification plates. The case cushions and exterior shall accommodate the ID Plates listed in Table II in the locations as shown in Figure 1 for Type I and Figure 2 for Type II. The plates shall be adhered to the case shell by any means normally utilized by the contractor, which will remain intact throughout case operations at all temperature extremes.

Table II: Identification plates

	TYPE I	TYPE II
SPECIAL WARNING MARKINGS	Plate-11731008-7	Plate-11731008-5
INSTRUCTION PLATES	Plate-12994172	Plate-12994167

3.5 Ownership and support requirements. Each carrying case shall possess the following life cycle ownership characteristics.

3.5.1 Safety. Each carrying case shall present no physical handling hazards, such as sharp protrusions, to the persons using them.

3.6 Operating environment requirements. Each carrying case shall operate under and after exposure to the following environmental conditions without damage or loss of performance.

3.6.1 Temperature. At low temperatures down to –40°F. At high temperatures up to +150°F.

3.6.2 Drop. The carrying case shall not suffer damage or loss of performance after 3 drops from a height of four (4) feet onto a smooth concrete surface with a load as specified in 4.7.3.

3.6.3 Waterproofness. The carrying case shall not leak when submerged in water for one hour with the water level 0.5 to

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

3.0 inches above the upper surface of the carrying case.

3.6.4 Fungus resistance. The carrying case shall show no evidence of damage, deterioration or profuse growth when subjected to the tests outlined in 4.6.5.

4. VERIFICATION

Table III: Requirement/verification cross reference matrix

Methods of Verification

N/A -Not Applicable
1 - Analysis
2 - Demonstration
3 - Examination
4 - Test

Classes of Verification

A - First article
B - Conformance acceptance

Section 3 Requirements	Verification Methods					Verification		Section 4 Verification	Verification Levels
	NA	1	2	3	4	A	B		
3.1	X							4.2	
3.2	X								
3.3	X								
3.3.1				X		X	X	4.4.1	I
3.3.2				X		X	X	4.4.2	I
3.3.3				X		X	X	4.4.3	I
3.4	X								
3.4.1				X		X	X	4.5.1	I
3.4.2		X				X	X	4.5.2	II
3.4.3		X				X	X	4.5.3	II
3.4.4				X		X	X	4.5.4	I
3.5		X							
3.5.1				X		X	X	4.6.1	I
3.6	X								
3.6.1					X	X		4.7.1 and 4.7.2	
3.6.2					X	X		4.7.3	
3.6.3					X	X	X	4.7.4	II
3.6.4					X	X		4.7.5	

4.1 Classification of inspections. Inspection requirements are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.1.1 Verification conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified.

4.1.2 Classification of characteristics. For examinations and tests cited herein or when required by the contract, critical, major, and minor characteristics are defined in Section 3 of MIL-STD-1916.

4.2 First article inspection. When specified in the contract, a sample of the carrying case shall be subjected to first article verification in accordance with Table III.

4.2.1 First article quantity. First article verification shall be performed on three carrying cases.

4.2.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens shall be subjected to any or all of the examinations and tests specified in this specification and be inspected for compliance with any or all requirements of the specification and the applicable drawings.

4.2.3 First article rejection. If any assembly, components or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of an assembly, component or test specimens to comply with any of the requirements.

4.3 Conformance verification. Sampling for conformance verification shall be in accordance with MIL-STD-1916. The sample shall meet the conformance inspection tests as specified in Table III. Unless otherwise specified in the contract, the item shall be returned to the lot after successful completion of testing. If the conditions stated are not met, the lot shall be rejected.

4.4 Operating verification.

4.4.1 Color. The exterior surfaces of the carrying case shall be visually examined compared to color chip 34079 of FED-STD-595 to verify that the color is uniform forest green.

4.4.2 Ease of use. The operator shall be wearing cold

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

weather protective gloves (on both hands). Lay the case flat, open and close the case a minimum of five times. The case shall open and close freely without binding. The latch shall be moved from the closed to open to closed position without binding. Pick up the case by the handle. The handle shall be securely attached to the case in that there shall be no visible space between the handle and the case at the mating junctures. The case material shall show no evidence of delamination, distortion, cracking or bubbling following the test.

4.4.3 Marking. The case shall be visually inspected to verify all marking conditions. The markings shall remain unblemished throughout the operational requirements testing of 4.5.

4.5 Interface verification.

4.5.1 Weight verification. Case shall be weighed on a commercial scale. Weight of each case is to be no more than 20 lbs.

4.5.2 Dimension verification. The external dimensions of the carrying case shall be measured and shall not exceed the dimensions specified in 3.4.2.

4.5.3 Cushion insert verification. The cavities of each cushion insert shall be measured to ensure compliance with the conditions of 3.4.3. The case shall be grasped by the cushion and lifted to ensure security. The test will be performed by personnel meeting the 95 percentile male or 5 percentile female soldier.

4.5.4 Identification plate verification. The location and inscriptions of the identification plates shall be visually examined to ensure compliance with the conditions of 3.4.4.

4.6 Ownership and support verification.

4.6.1 Safety verification. Inspect the carrying case to be free of hazardous burrs, cracks, deformation, distortion, disconnects, rings, bulges, or sharp edges that would prevent proper seating alignment, engagement, or assembly of pallet components, posing physical danger to the operator or equipment.

4.7 Operating environment verification. Each case to be tested will be exposed to all tests from this section. All cases shall be tested for proper functioning and inspected for damages prior to starting tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

4.7.1 Low temperature. Subject a case to air temperature of –40°F for a period of one hour after internal temperature stabilization of the test item. At the end of the one hour period, while the case is at the –40°F temperature, open and close the case a minimum of five times. The case shall open and close without binding. The latch shall be moved from the closed to open to closed position without binding. Pick up the case by the handle. The handle shall be securely attached to the case. The handle shall not be separated from the case body at the mating surfaces. The case material shall show no evidence of delamination, distortion, or cracking. Caution shall be exercised during this test to avoid thermal shock.

4.7.2 High temperature. Subject a case to air temperature of +150°F for a period of one hour after internal temperature stabilization of the test item. At the end of the one hour period, while the case is at the +150°F temperature, open and close the case a minimum of five times. The case shall open and close without binding. The latch shall be moved from the closed to open to closed position without binding. Pick up the case by the handle. The handle shall be securely attached to the case. The handle shall not be separated from the case body at the mating surfaces. The case material shall show no evidence of delamination, distortion, or cracking. Caution shall be exercised during this test to avoid thermal shock.

4.7.3 Drop. Insert dummy weights totaling 25 lbs. +/- 5lbs inside the case. At ambient temperature the case shall be dropped from a height of 4 ft. to a smooth, concrete surface in each of the following orientations: the top; a side; and the flat of the bottom. At the end of the series of drops, open and close the case a minimum of five times. The case shall open and close without binding. The latch shall be moved from the closed to open to closed position without binding. Pick up the case by the handle. The handle shall be securely attached to the case. The handle shall not be separated from the case body at the mating surfaces. The case material shall show no evidence of delamination, distortion, or cracking.

4.7.4 Leakage. The case (lying on the flat of the bottom face) shall be submerged with the water level 0.5 to 3.0 inches above the upper surface of the carrying case (water within 5° of case temperature) for one hour. The case shall contain the 25 lbs. of dummy weight. Additional weight shall be applied to the outside of the case for the purposes of submergence. The additional weights must not rest on the top of the case, but rather tied to the handle and rest along side the case. After the test, the case must show no evidence of water penetration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

4.7.5 Fungus resistance. Subject one case to fungus resistance test per the requirement as defined in Method 508.4 of MIL-STD-810.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packing requirements. Packing requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. These carrying cases protect high value, fire control devices. Type I and Type II cases contain radioactive material that is under strict license and control of the Nuclear Regulatory Commission (NRC). The protection provided by the cases must be sufficient to prevent extremely hazardous environmental accidents during military use, transport and storage.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Issue of the DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2).

c. The case part number and marking tables to be used.

d. When a First Article Test is required (see 3.1, 4.3.1, and 6.3).

e. When conformance verification is required (see 4.3.2 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

f. Packaging requirements (see 5.1).

g. GFE Requirement (see 6.6)

6.3 First article. When requiring a first article inspection, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, or the number of test items. These documents should also include specific instructions regarding arrangements for examinations, approval of first article test results, and disposition of first article samples. Pre-solicitation documents should provide Government waiver rights for samples for first article inspection to bidders offering a previously acquired or tested product. Bidders offering such products who wish to rely on such production testing must furnish evidence with the bid that prior Government approval is appropriate for the pending contract.

6.4 Conformance inspection. Affordable conformance inspection with confidence varies depending upon a number of procurement risk factors. Some of these factors include: contractor past performance, government schedules and budget, product material design maturity, manufacturing capital equipment and processes applied, the controlled uniformity of those processes, labor skill and training, and the uniformity of measuring processes and techniques. During the solicitation, contracting documents should indicate those tests desired from Table I and II and their designated frequency based on a risk assessment for the procurement.

6.5 Government furnished equipment. See 4.3.2. Cold weather protective gloves should be required as GFE for evaluation of requirements for this item.

6.6 Subject term (key word) listing:

Instrument case
Cushion insert
Identification plate

6.7 Instruction to acquisition personnel: Certified performance specifications do not require a solicitation waiver for use in a procurement action.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

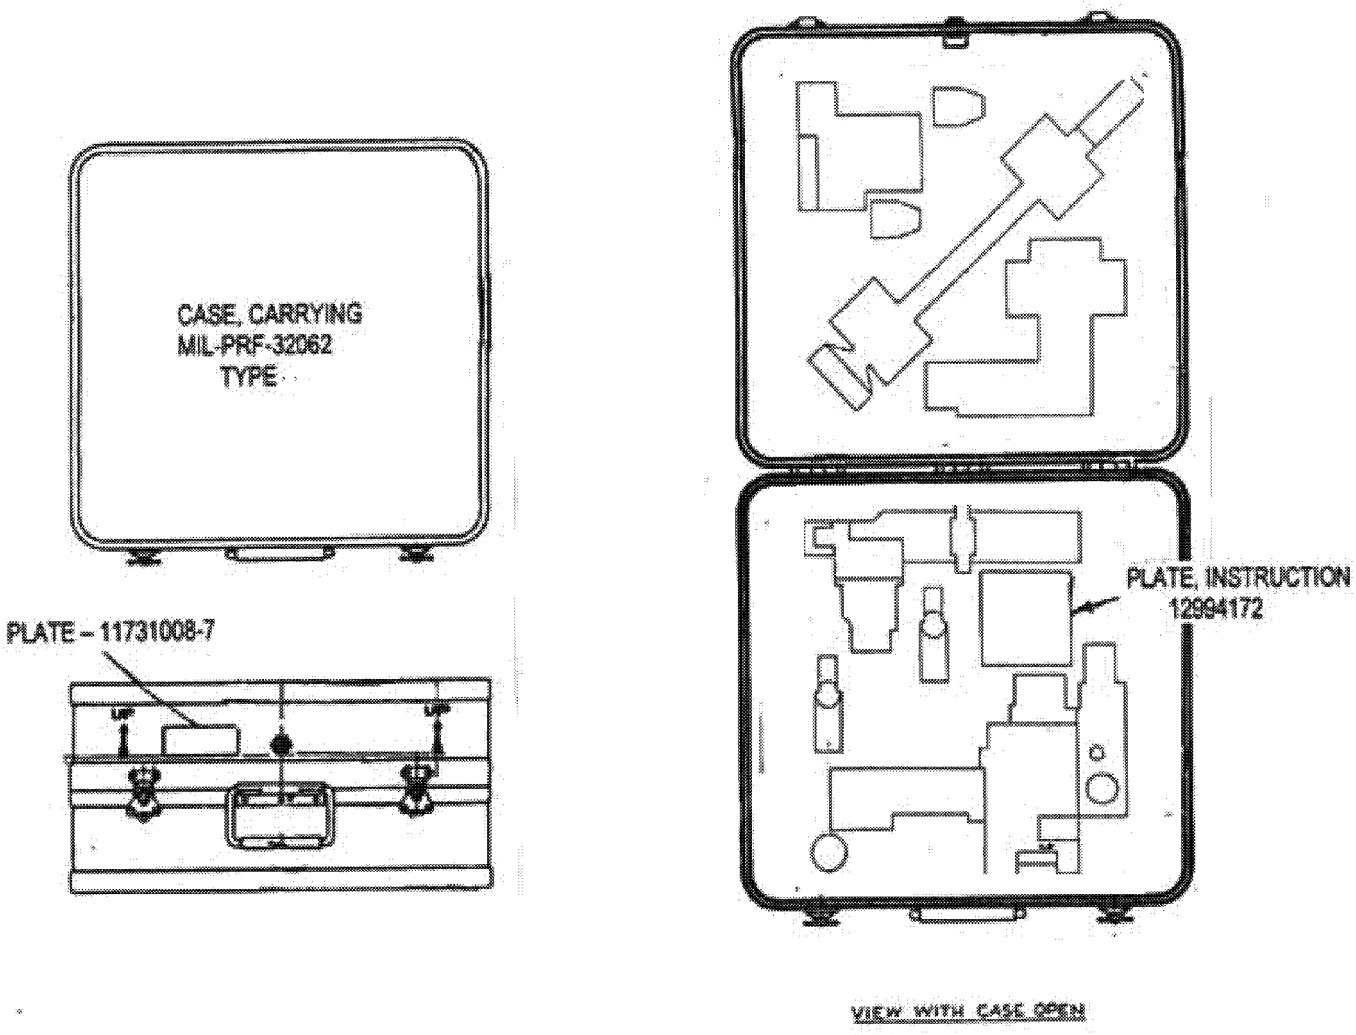


FIGURE 1 – LOCATION DRAWING FOR TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

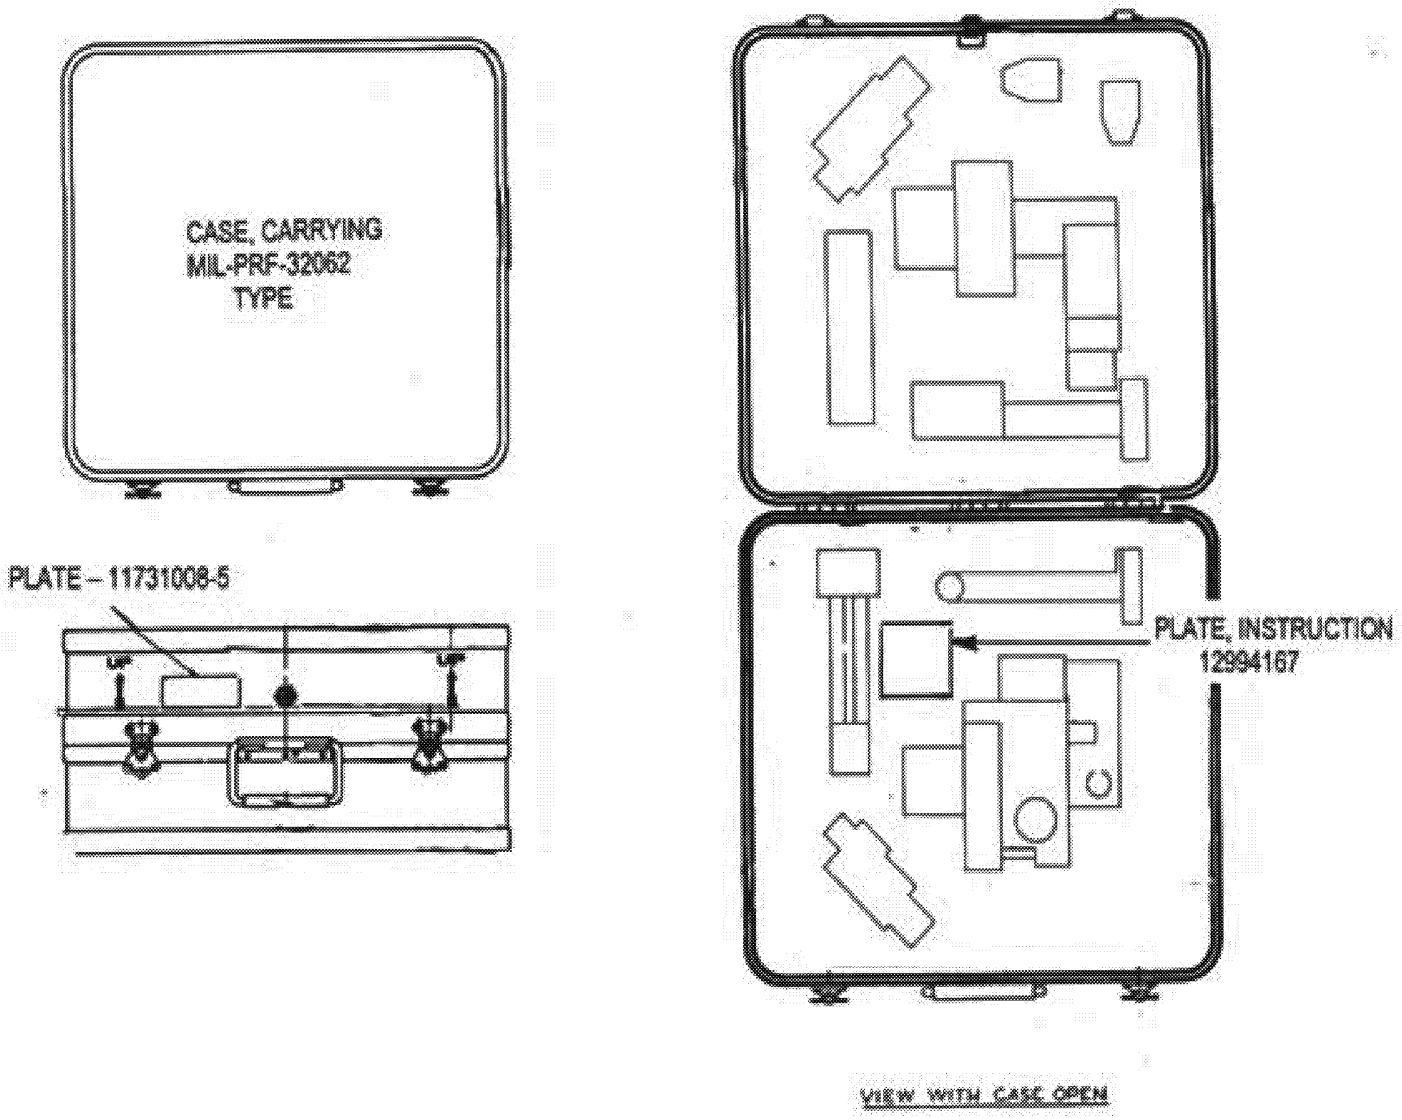


FIGURE 2 – LOCATION DRAWING FOR TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army-AR

Preparing activity:
Army-AR

(Project: 1240-0050)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-32062	2. DOCUMENT DATE *(YYYYMMDD)* 000315

3. DOCUMENT TITLE

CASE, CARRYING FOR M198/M119 FIRE CONTROL OPTICS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include ZIP Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)*
U.S. ARMY TACOM-ARDEC	(1) Commercial (973)724-6628 (2) DSN 880-6628
c. ADDRESS *(Include ZIP Code)* ATTN: AMSTA-AR-QAW-E, B-12 PICATINNY ARSENAL, NJ 07806-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:32Z
Check the source to verify that this is the current version before use.