The documentation and process conversion measures necessary to comply with this revision shall be completed by 1 February 2006 and the requirements of paragraph 4.3.1 shall be completed by 1 November 2006.

INCH-POUND
MIL-PRF-19500/337J
1 November 2005
SUPERSEDING
MIL-PRF-19500/337H
5 November 2003

* PERFORMANCE SPECIFICATION SHEET

* SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING, TYPES 1N4153-1, 1N4153UR-1, 1N4153UB, 1N4153UBCA, 1N4153UBCC, 1N4153UBD, 1N4534, AND 1N4534UB, JAN, JANTX, JANTXV, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

* 1.1 Scope. This specification covers the performance requirements for controlled forward voltage switching diodes. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500. Two levels of product assurance are provided for each unencapsulated device type.

* 1.2 Physical dimensions. See figures 1 (axial leads), 2 (DO-213AA), 3 (UB), 4 (die).

* 1.3 Maximum ratings. Unless otherwise specified T_A = +25°C.

Type	V_{BR}	V_{RWM}	$I_{O(PCB)}$ T_A = 75°C (1) (2)	I_{FSM} t_p = 8.3ms	T_{STG} & T_J	$R_{\Theta JL}$ L = .375 inch (9.53 mm) (1)	$R_{\Theta JEC}$ (UR) (1)	$R_{\Theta JSP}$ (UB) (1) (3)	$R_{\Theta JA}$ (2)
	V dc	V (pk)	mA	A (pk)	°C	°C/W	°C/W	°C/W	°C/W
1N4153-1	100	75	200	2	-65 to +175	250			325
1N4153UR-1							100		
1N4153UB, 1N4153UBCA, 1N4153UBCC, 1N4153UBD					-55 to +200			120	325
1N4534					-55 to +175	250			325
1N4534UR							100		
1N4534UB					-55 to +200			120	325

(1) For temperature-current derating curves, see figure 5.
(2) See figures 6, 7, and 8 for thermal impedance curves. T_A = +75°C for both axial and Metal Electrical Face (MELF) (UR) on printed circuit board (PCB), PCB = FR4 - .0625 inch (1.59 mm) 1-layer 1-Oz Cu, horizontal, in still air; pads for (UR) = .061 inch (1.55 mm) x.105 inch (2.67 mm); pads for axial = .092 inch (2.34 mm) diameter, strip = .030 inch (0.76 mm) x 1 inch (25.4 mm) long, lead length L ≤ .187 inch (≤ 4.75 mm); $R_{\Theta JA}$ with a defined PCB thermal resistance condition included, is measured at I_O = 200 mA dc.
(3) $R_{\Theta JSP}$ refers to thermal resistance from junction to the solder pads of the UB package.

* Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to semiconductor@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics at T_A = +25°C, unless otherwise specified.

Limits	V_{F1} I_F = 100 μA dc	V_{F2} I_F = 250 μA dc	V_{F3} I_F = 1 mA dc	V_{F4} I_F = 2 mA dc	V_{F5} I_F = 10 mA dc	V_{F6} I_F = 20 mA dc
Min	0.490 V dc	0.530 V dc	0.590 V dc	0.620 V dc	0.700 V dc	0.740 V dc
Max	0.550 V dc	0.590 V dc	0.670 V dc	0.700 V dc	0.810 V dc	0.880 V dc

Limit	I_{R1} V_R = 50 V dc	I_{R2} V_R = 50 V dc T_A = 150°C	C V_R = 0 V dc f = 1 MHz	t_{rr} I_F = I_R = 10 mA dc R_L = 100 ohms, I_{RR} = 1.0 mA dc
Max	50 nA dc	50 μA dc	2.0 pF	4 ns

(1) Primary electrical characteristics for surface mount devices are equivalent to the corresponding non-surface mount devices unless otherwise specified.

2. APPLICABLE DOCUMENTS

* 2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

* 2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

* DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.


* DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

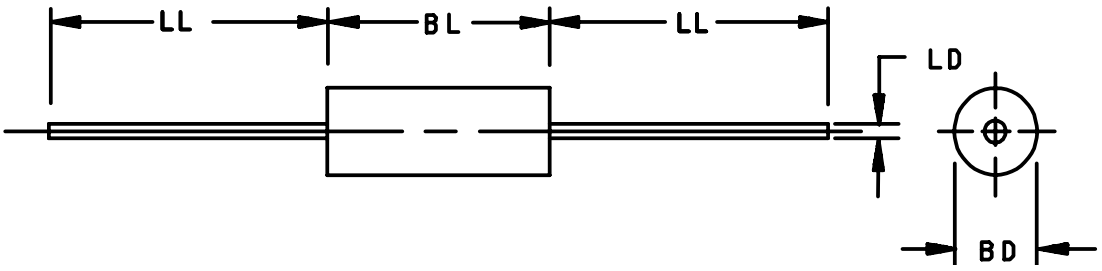


Types	Ltr	Dimensions			
		Inches		Millimeters	
		Min	Max	Min	Max
1N4153-1	BD	.056	.075	1.42	1.91
	BL	.140	.180	3.56	4.57
(DO-35)	LD	.018	.022	0.46	0.56
	LL	1.000	1.500	25.40	38.10
1N4534	BD	.050	.075	1.27	1.91
	BL	.080	.120	2.03	3.05
(DO-34)	LD	.018	.022	0.46	0.56
	LL	1.000	1.500	25.40	38.10

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

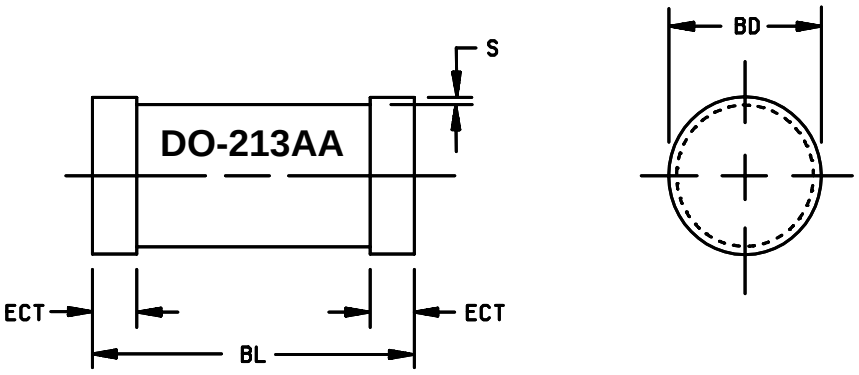


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	.063	.067	1.60	1.70
BL	.130	.146	3.30	3.70
ECT	.016	.022	0.41	0.55
S	.001 min		0.03 min	

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Dimensions are pre-solder dip.
4. Referencing to dimension S, minimum clearance of glass body to mounting surface on all orientations.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 2. Physical dimensions, 1N4153UR-1 (DO-213AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

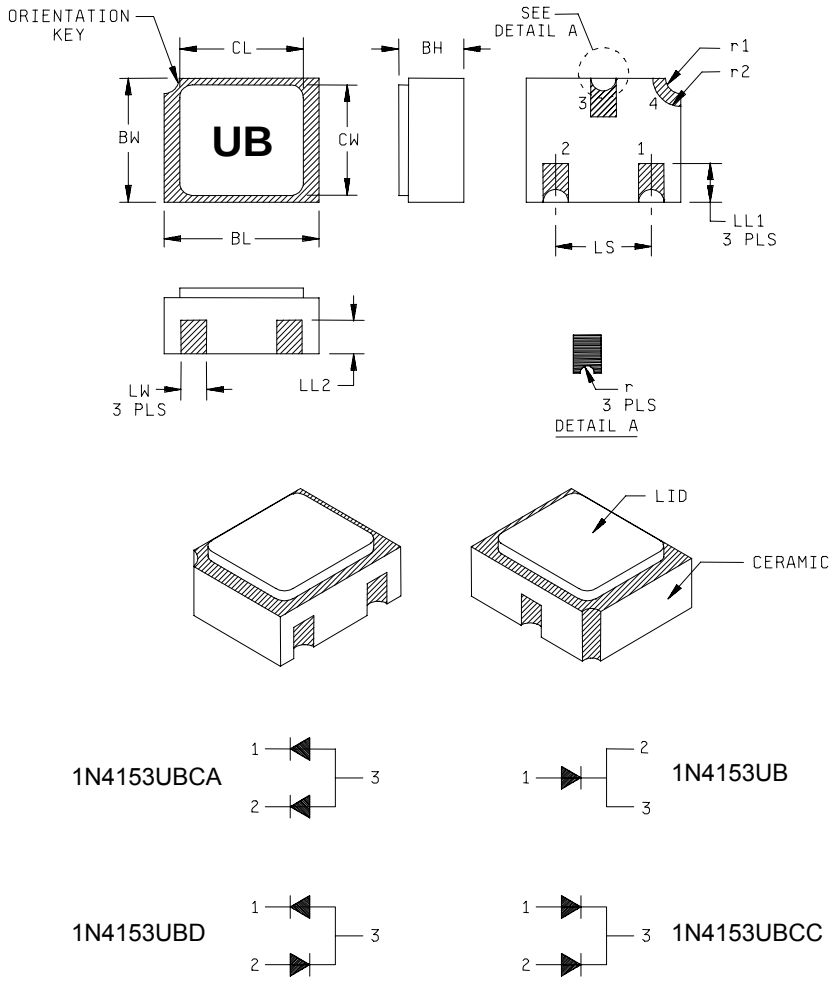


Symbol	Dimensions				Symbol	Dimensions			
	Inches		Millimeters			Inches		Millimeters	
	Min	Max	Min	Max		Min	Max	Min	Max
BH	.046	.056	0.97	1.42	LL2	.017	.035	0.43	0.89
BL	.115	.128	2.82	3.25	LS	.071	.079	1.81	2.01
BW	.085	.108	2.41	2.74	LW	.016	.024	0.41	0.61
CL		.128		3.25	r		.008		0.20
CW		.108		2.74	r1		.012		0.31
LL1	.022	.038	0.56	0.96	r2		.022		0.56

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Ceramic package only.
3. Hatched areas on package denote metallized areas. Pad 4 = shielding, connected to the lid.
4. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

* FIGURE 3. Physical dimensions, surface mount (UB version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

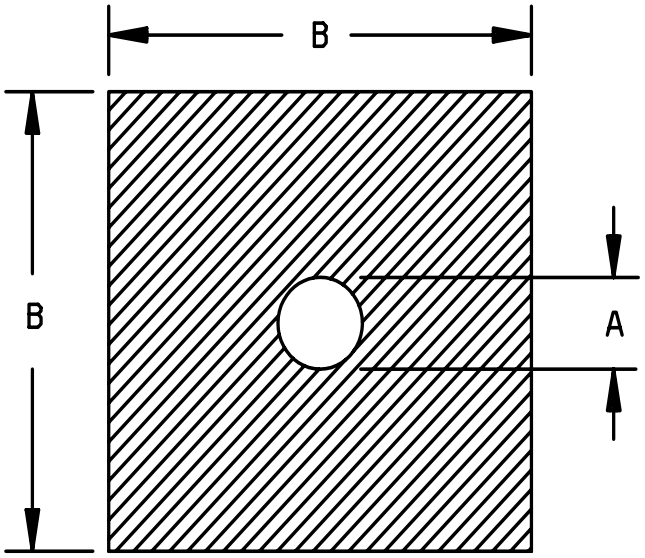

	Dimensions			
Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	.0059	.0061	.150	.155
B	.0130	.0170	.330	.430

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Element evaluation accomplished utilizing TO-5 package.
4. The physical characteristics of the die are:

Metallization:
Top (anode): Al.
Back (cathode): Au.
Al thickness: 25,000 Å minimum.
Gold thickness: 4,000 Å minimum.
Chip thickness: .010 inches (0.25 mm) ±.002 inches (0.05 mm).

FIGURE 4. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list (QML) before contract award (see 4.2 and 6.3).

* 3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

$R_{\Theta JBB}$	Thermal resistance junction to burn-in board.
SP	Solder pad on UB devices.
UB	Hermetic unleaded 3 terminal leadless chip carrier (LCC) package type.
UR	Unleaded round package type designation.
V_{fr}	Forward recovery voltage. Specified maximum forward voltage used to determine forward recovery time.

* 3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figures 1 (axial leads), 2 (DO-213AA), 3 (UB), 4 (die).

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

* 3.4.2 Diode construction. All devices (except UB version) shall be metallurgically bonded, double plug construction in accordance with the requirements of MIL-PRF-19500. All glass diodes shall be designed with sufficient thermal compensation in the axial direction to optimize tensile and compressive stresses. Dimensional analysis is required of all materials used to achieve axial thermal compensation. Dimensional tolerances and corresponding coefficient of thermal expansion (CTE) shall be documented on the DSCC Design and Construction Form 36D and shall be approved by the qualifying activity to maintain qualification. Dimensional tolerances shall be sufficiently tight enough to prevent excessive stresses due to the inherent CTE mismatch. The UB devices shall be eutectically mounted and wire bonded in a ceramic package. The 'UR' version shall be structurally identical to the axial leaded versions except for end-cap lead attachment.

* 3.5 Marking. Marking shall be in accordance with MIL-PRF-19500. Manufacturer's identification and date code shall be marked on the devices. Initial container package marking shall be in accordance with MIL-PRF-19500. The polarity shall be indicated with a contrasting color band to denote the cathode end. The prefixes JAN, JANTX, and JANTXV may be abbreviated as J, JX, and JV, respectively. The part number may be reduced to J4153, JX4153, or JV4153. No color coding will be permitted for part numbering.

* 3.5.1 UR devices. For 'UR' version devices only, all marking, except polarity, may be omitted from the body, but shall be retained on the initial container. Polarity marking of 'UR' devices shall consist as a minimum, a band or three contrasting dots around the periphery of the cathode.

* 3.5.2 UB devices. 'UB' devices do not require polarity marking.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

* 4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not require the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

* 4.2.1.1 Group E thermal impedance. Each supplier shall submit a thermal impedance ($Z_{\Theta JX}$) histogram of the entire qualification lot. The histogram data shall be taken prior to the removal of devices that are atypical for thermal impedance. Thermal impedance curves (from $Z_{\Theta JX}$ test pulse time to $R_{\Theta JX}$ minimum steady-state time) of the best device in the qual lot and the worst device in the qual lot (that meets the supplier proposed screening limit), or from the thermal grouping, shall be submitted. The optimal test conditions and proposed initial thermal impedance screening limit shall be provided in the qualification report. Data indicating how the optimal test conditions were derived for $Z_{\Theta JX}$ shall also be submitted. The proposed specification maximum thermal impedance curve shall be submitted. The qualifying activity may approve a different $Z_{\Theta JX}$ limit not to exceed the specification's thermal curve for conformance inspection end-point measurements as applicable**.** Equivalent data, procedures, or statistical process control plans may be used for part, or all, of the above requirements. The approved thermal impedance conditions and limit for $Z_{\Theta JX}$ shall be used by the supplier in screening and table I, subgroup 2. The approved thermal resistance conditions for $R_{\Theta JX}$ shall be used by the supplier for conformance inspection. For product families with similar thermal characteristics based on the same physical and thermal die, package, and construction combination (thermal grouping), the supplier may use the same thermal impedance curves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (JANTX and JANTXV levels). Screening shall be in accordance with table IV of MIL-PRF-19500 and as specified herein. Specified electrical measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screening (see table IV of MIL-PRF-19500)	JANTXV and JANTX level
1a 1b	Not required Required (JANTXV only)
3a	Required
(1) 3c	Thermal impedance (see 4.3.2)
7a 7b	Not applicable (required for UB) Optional
9	Not required
10	Method 1038 of MIL-STD-750, condition A
(2) 11	I_{R1} and V_{F1}
12	See 4.3.1
(3) (4) 13	Subgroup 2 of table I herein; ΔI_{R1} = 100 percent of initial value or 15 nA dc, whichever is greater; ΔV_{F1} = 25 mV dc.
14a (5) 14b	Not applicable Required

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
(2) Test within 24 hours after removal from test.
(3) When thermal impedance is performed prior to screen 13, it is not required to be repeated in screen 13.
(4) PDA ≤ 5 percent.
(5) For clear glass diodes, the hermetic seal (gross leak) test may be performed any time after temperature cycling.

* 4.3.1 Power burn-in conditions. Power burn-in conditions are as follows (see 4.5.2): Method 1038 of MIL-STD-750, condition B. V_R = rated V_{RWM}; f = 50-60 Hz; $I_{O(min)} = I_{O(PCB)}$. T_A = 75°C maximum. Adjust T_A, I_O or I_F to achieve T_J = 125°C minimum or to the maximum current density limited by small die geometry. The maximum current density of small die shall be submitted to the qualifying activity for approval. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, TJ, mounting conditions, etc.) may be used for JANTX and JANTXV quality levels. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

* 4.3.2 Thermal impedance measurements. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 of MIL-STD-750, as applicable, using the guidelines in that method for determining I_H and I_M. t_{MD} shall be 70 μs maximum, t_H shall be 10 ms maximum. The thermal impedance limit shall comply with the thermal impedance graphs on figures 6, 7 and 8 (less than or equal to the curve value at the same t_H time) and shall be less than the process determined statistical maximum limit as outlined in method 3101 or 4081 of MIL-STD-750, as applicable. See group E, subgroup 4 of table II herein.

* 4.3.3 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with appendix G of MIL-PRF-19500. Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

* 4.3.4 JAN testing. JAN level product will have temperature cycling and thermal impedance testing performed in accordance with MIL-PRF-19500, JANTX level screening level requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table V of MIL-PRF-19500, table I herein, and as specified herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and 4.4.2.1 herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2.

* 4.4.2.1 Group B inspection, table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500. Leaded samples from the same lot may be used in lieu of 'UR' suffix sample for life test.

Subgroup	Method	Conditions
B2	1056	0°C to +100°C, 10 cycles.
B2	1051	-55°C to +175°C, 45 cycles, including screening.
B2	2005	I_F = 100 mA, axial tensile stress = 8 lbs, T_A = +150°C; (not applicable to UR or UB package).
B3	1026	$V_{(pk)}$ = rated V_{RWM}; f = 50-60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C. See 4.5.2.
B4	2101	Decap analysis; scribe and break only.
B6	1032	T_A = +175°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

* 4.4.3.1 Group C inspection, table VII of MIL-PRF-19500.

Subgroup	Method	Conditions
C2	1056	0°C to + 100°C, 10 cycles.
* C2	1051	-55°C to + 175°C, 45 cycles including screening.
C2	2036	Tension - test condition A; weight = 10 pounds, t = 15 s; lead fatigue = condition E (not applicable to 'UR' and 'UB' suffix types).
* C5	4081	L = .375 inch (9.53 mm), $R_{\Theta JL}$ = 250°C/W maximum; $R_{\Theta JEC}$ = 100°C/W; $R_{\Theta JSP}$ =120°C/W; (see 4.3.2), 22 devices, c = 0.
* C6	1026	1,000 hours minimum, $V_{(pk)}$ = rated V_{RWM}; f = 50 - 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C. See 4.5.2.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table IX of MIL-PRF-19500, and table II herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

* 4.5.1 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Free air power burn-in and life tests. The use of a current limiting or ballast resistor is permitted provided that each device under test still sees the full P_t (minimum) and that the minimum applied voltage, where applicable, is maintained throughout the burn-in period. Method 3100 of MIL-STD-750 shall be used to measure T_J.

* 4.5.3 Forward recovery voltage and time. Forward recovery shall be measured as the time interval between zero time and the point where the pulse has decreased to 110 percent of the steady-state value of V_F when I_F = 50 mA dc. The maximum rise time of the response detector shall be 1 ns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.3.2	$Z_{\Theta JX}$			°C/W
Forward voltage	4011	I_F = 100 μA dc (pulsed, see 4.5.3)	V_{F1}	0.49	0.55	V dc
Forward voltage	4011	I_F = 250 μA dc (pulsed, see 4.5.3)	V_{F2}	0.53	0.59	V dc
Forward voltage	4011	I_F = 1 mA dc (pulsed, see 4.5.3)	V_{F3}	0.59	0.67	V dc
Forward voltage	4011	I_F = 2 mA dc (pulsed, see 4.5.3)	V_{F4}	0.62	0.70	V dc
Forward voltage	4011	I_F = 10 mA dc (pulsed, see 4.5.3)	V_{F5}	0.70	0.81	V dc
Reverse current	4016	DC method; V_R = 50 V dc	I_{R1}		50	nA dc
Breakdown voltage	4021	I_R = 5 μA dc	V_{BR1}	100		V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	DC method, V_R = 50 V dc	I_{R2}		50	μA dc
Low temperature operation:		T_A = -55°C				
Breakdown voltage	4021	I_R = 5 μA dc	$V_{(BR)2}$	75		V dc
Subgroup 4						
Junction capacitance	4001	V_R = 0 V dc, f = 1 MHz, V_{sig} = 50 mV (pk to pk), max	C		2.0	pF
Reverse recovery time	4031	Condition A, I_F = I_{RM} = 10 mA dc	t_{rr}		4	ns
Scope display evaluation	4023	See MIL-STD-750, method 4023, figures 4023-3, -7, -9, -10 only				
Subgroup 5						
Not applicable						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 6						
Surge current	4066	Condition A (sine wave) $i_{f(surge)}$ = 2 A(pk), I_O = 0, V_{RM} = 0, 10 surges, 8.3 ms width each, one surge per minute, T_A = +25°C or Condition B (square wave) $I_{F(surge)}$ = 4 A (pk) 10 surges, 1μs width each, duty factor = 0.0055 percent, T_A = 25°C				
Electrical measurements		See table I, subgroup 2.				
Subgroup 7						
Not applicable						


1/ For sampling plan, see MIL-PRF-19500.
2/ UBCA, UBCC, and UBD devices are to have each diode tested individually.
3/ Electrical characteristics for 'UB' and ' UR' suffix versions are identical to the corresponding non-suffix versions unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

* TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

Inspection	MIL-STD-750		Qualification inspection
	Method	Conditions	
Subgroup 1			n = 45, c = 0
Thermal shock (glass strain)	1056	100 cycles 0°C to 100°C	
Temperature cycling	1051	500 cycles, -65°C to +175°C	
Hermetic seal	1071	Gross leak only. Fine and gross leak required for UB.	
Electrical measurement		See table I, subgroup 2	
Subgroup 2			n = 45, c = 0
Intermittent operating life	1037	10,000 cycles.	
Electrical measurements		See table I, subgroup 2.	
Subgroup 4			
Thermal impedance curves		See 4.2.1.1	Sample size N/A
Subgroup 5			
Not applicable			
Subgroup 6			
ESD	1020		n = 3, c = 0
Subgroup 8			
Resistance to glass cracking	1057	Test condition B. Test until failure occurs or to a maximum of 25 cycles, whichever comes first.	n = 45
Subgroup 9			n = 22, c = 0
Monitored mission temperature cycling	1055	Not required for UB suffix devices.	
Electrical measurements		See table I, subgroup 2.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

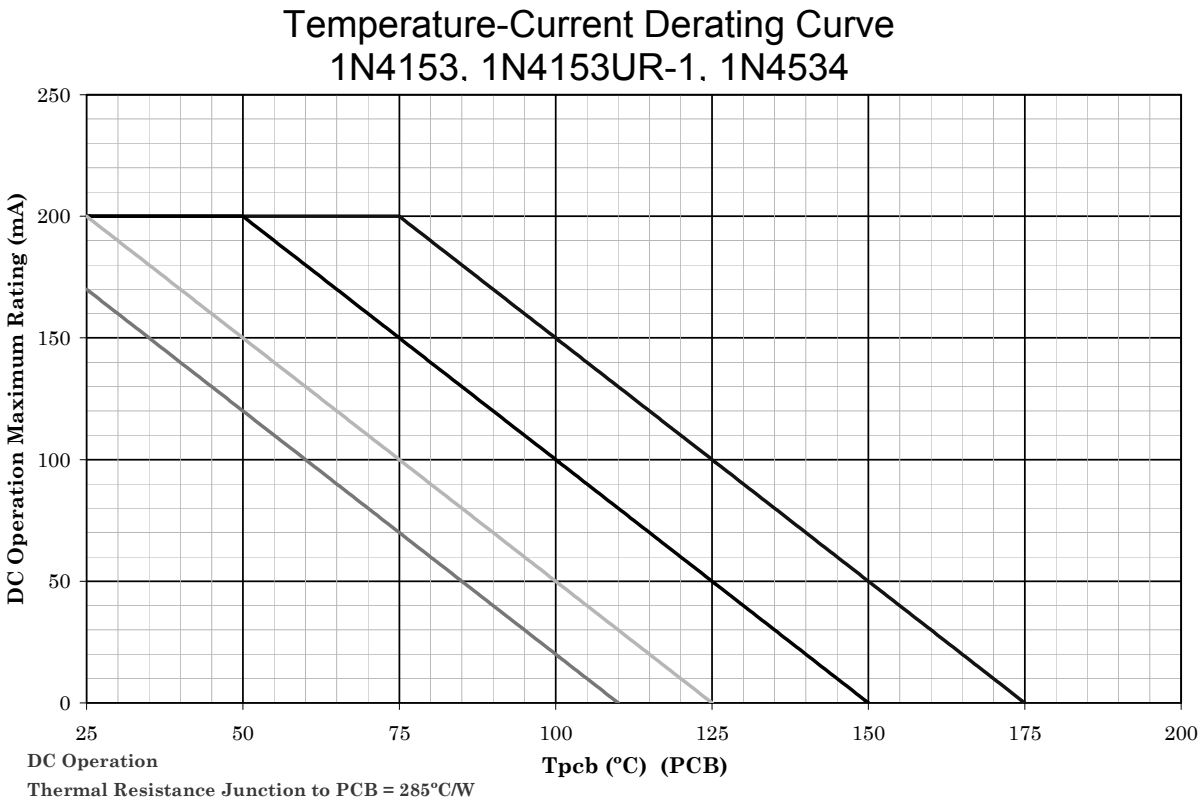


NOTES:

1. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ 175°C) and current rating specified. (See 1.3.)
3. Derate design curve chosen at T_J ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ 125°C, and 110°C to show current rating where most users want to limit T_J in their application.

* FIGURE 5. Temperature-current derating graph (all devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

1N4153-1, 1N4534 DO-35, DO-34 Axial T_L = 25°C
Maximum Thermal Impedance Plots

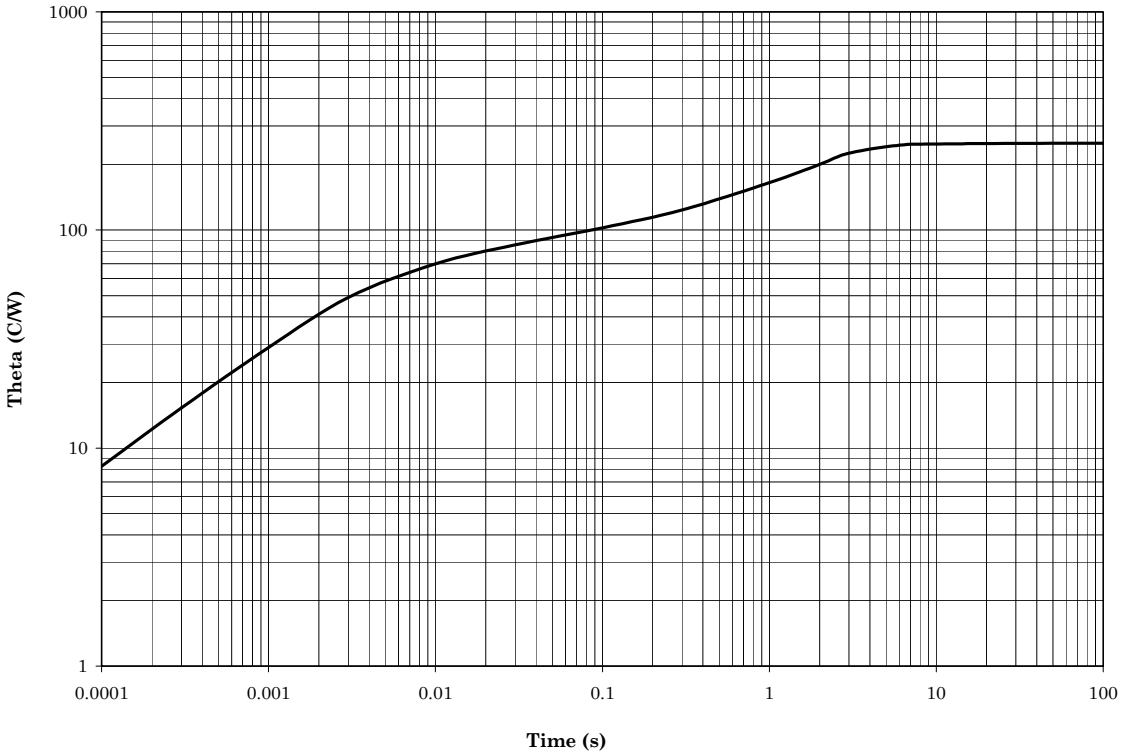


$R_{\Theta JL}$ = 250°C/W

Note: $Z_{\Theta JX}$ = 70°C/W maximum at t_H = 10ms.

* FIGURE 6. Thermal impedance (axial leads).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

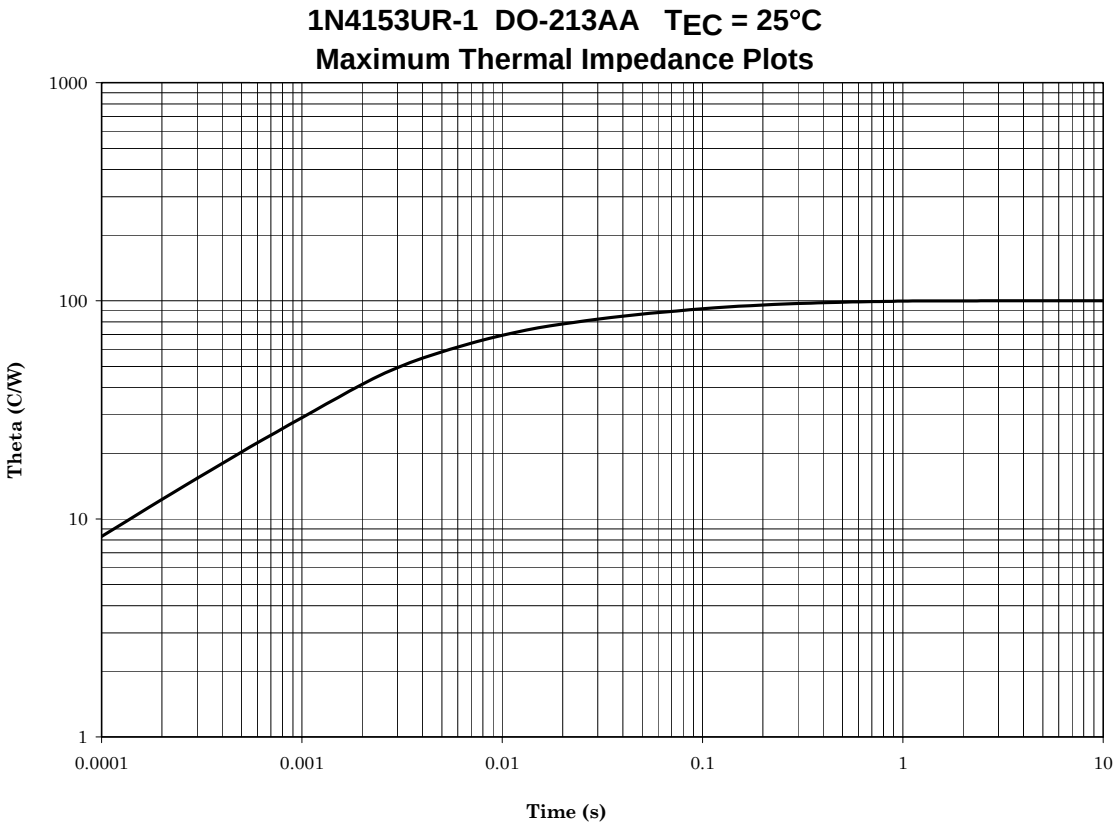


$R_{\Theta JEC}$ = 100°C/W

Note: $Z_{\Theta JX}$ = 70°C/W maximum at t_H = 10ms.

FIGURE 7. Thermal impedance (MELF surface mount).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

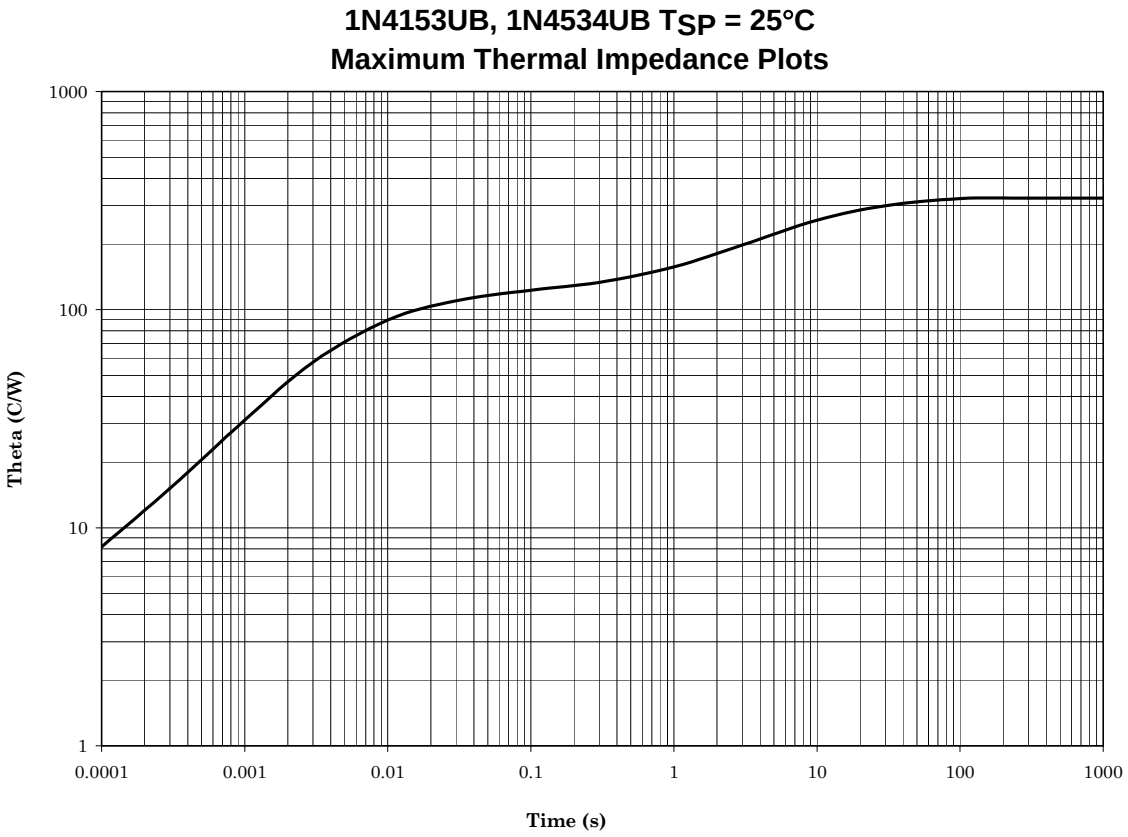

$R_{\Theta JSP}$ = 120°C/W

Note: $Z_{\Theta JX}$ = 90°C/W maximum at t_H = 10ms.

FIGURE 8. Thermal impedance (UB versions).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

e. Destructive physical analysis when requested.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil.

* 6.4 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCA1N4153) will be identified on the QML.

JANC ordering information	
PIN	Manufacturer
	43611
1N4153 1N4534	JANHCA1N4153, JANKCA1N4153 JANHCA1N4534, JANKCA1N4534

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.

* 6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS
Air Force - 19

Preparing activity:
DLA - CC

(Project 5961-2965)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:28Z
Check the source to verify that this is the current version before use.