


MILITARY SPECIFICATION SHEET

DECORATION, SILVER LIFE-SAVING MEDAL AND BAR, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-D-3943.

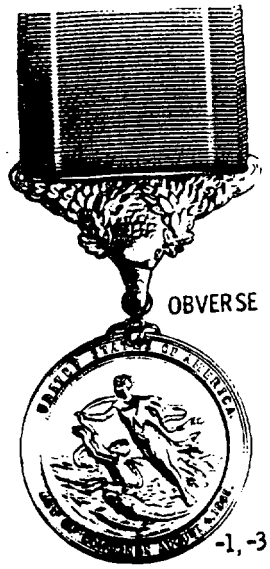

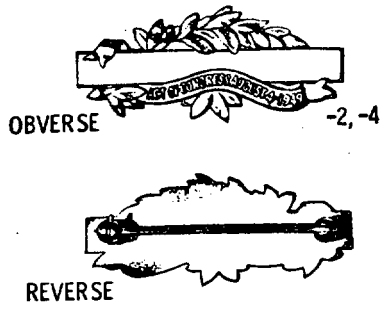

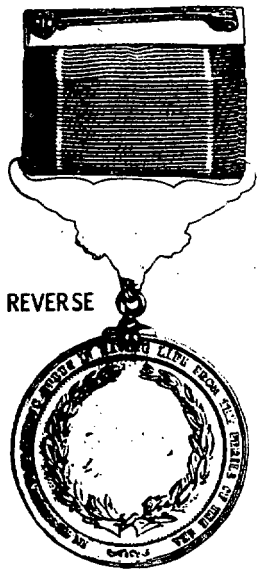

DASH NO.
- -1: SILVER LIFE-SAVING MEDAL, REGULAR
- -2: SILVER LIFE-SAVING BAR, REGULAR
- -3: SILVER LIFE-SAVING MEDAL, MINIATURE
- -4: SILVER LIFE-SAVING BAR, MINIATURE

MATERIAL:
- -1,-3:
  - PENDANT AND SUSPENSION BAR: 99 PERCENT PURE SILVER
  - PENDANT SWIVEL, SWIVEL EYE, ATTACHMENT RING AND PENDANT RIBBON ATTACHMENT BAR: STERLING SILVER
  - PIN, HINGE AND CATCH (ON ATTACHMENT BAR): NICKEL SILVER
- -2,-4:
  - BAR: 99 PERCENT PURE SILVER PIN, HINGE AND CATCH: NICKEL SILVER

DIMENSIONS (INCHES):
- PENDANT
  - -1,-3:
    - DIAMETER:
      - -1: 1-15/32 (REF)
      - -3: 3/4 (REF)
    - THICKNESS (AT RIM):
      - -1: .120 (REF)
      - -3: .080 (REF)
  - -2,-4:
    - HEIGHT (OVERALL):
      - -2: 9/16 (REF)
      - -4: 9/32 (REF)
    - WIDTH (OVERALL):
      - -2: 1-21/32 (REF)
      - -4: 53/64 (REF)
    - THICKNESS (AT THICKEST POINT):
      - -2,-4: .095 (REF)
- SUSPENSION BAR:
  - HEIGHT (OVERALL):
    - -1: 15/16 (REF)
    - -3: 1/2 (REF)
  - WIDTH (OVERALL):
    - -1: 1-9/16 (REF)
    - -3: 25/32 (REF)
  - THICKNESS:
    - -1,-3: .095 (REF)

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:51Z
Check the source to verify that this is the current version before use.

WEIGHT (MINIMUM):
-1 (PENDANT AND SUSPENSION BAR ONLY, ASSEMBLED): 560 GRAINS
-2 (INCLUDING ATTACHING DEVICE): 144 GRAINS
-3 (PENDANT AND SUSPENSION BAR ONLY, ASSEMBLED): 270 GRAINS
-4 (INCLUDING ATTACHING DEVICE: 80 GRAINS

FINISH: LIGHTLY OXIDIZED, RELIEVED, MATTE FINISH.

NOTES:

1. THICKNESS GIVEN FOR INFORMATION ONLY. WEIGHT GOVERNS.
2. THE SUSPENSION BAR RING SHALL BE FORMED FROM .050 ± .002 INCH DIAMETER WIRE FOR DASH NO. 1 AND .032 ± .002 INCH DIAMETER WIRE FOR DASH NO. 3. THE RINGS SHALL BE SOLDERED TO THE VERTICAL CENTERLINE OF THE SUSPENSION BAR 5/32 ± 1/64 INCH ABOVE THE TIP OF THE EAGLE'S BEAK FOR DASH NO. 1 AND 5/64 ± 1/64 FOR DASH NO. 3.
3. THE SWIVEL EYE RING SHALL BE FORMED FROM .044 ± .002 INCH DIAMETER WIRE FOR DASH NO. 1 AND .030 ± .002 INCH DIAMETER WIRE FOR DASH NO. 3. THE RINGS SHALL BE SWAGED IN THE SWIVEL DEVICE.
4. THE SWIVEL DEVICE SHALL BE SOLDERED TO THE TOP OF THE PENDANT.
5. THE RIBBON ATTACHMENT BAR SHALL CONFORM TO TYPE III RIBBON BAR.
6. THE ATTACHING DEVICE FOR DASH NOS. 2 AND 4 SHALL BE LOCATED ON AND SOLDERED TO THE HORIZONTAL CENTERLINE EQUIDISTANT FROM EACH SIDE. THE ATTACHING DEVICE SHALL BE 1-5/8 ± 1/64 INCH ON CENTERS FOR DASH NO. 2 AND 13/16 ± 1/64 INCH ON CENTERS FOR DASH NO. 4.
7. TYPE I DECORATION SET SHALL CONSIST OF A REGULAR SIZE MEDAL AND BAR, A SERVICE RIBBON AND A LAPEL BUTTON ALL PACKAGED IN A PRESENTATION CASE CONFORMING TO MIL-C-14633, STYLE 6, TYPE VIII WITH, A CLASS 1 AND 1A PAD.
8. THE RIBBON FOR THE PENDANT DRAPE AND SERVICE RIBBON SHALL CONFORM TO MIL-R-11589/135.
9. THE LAPEL BUTTON SHALL CONFORM TO MIL-L-11484/8.

Custodian:
Army - IH
Navy - NU

Review activity:
Other - CT

User activity:
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455 - 0251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:51Z
Check the source to verify that this is the current version before use.