NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/21D
1 May 1997
SUPERSEDING
MIL-D-3943/21C
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, SILVER LIFE-SAVING MEDAL AND BAR, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

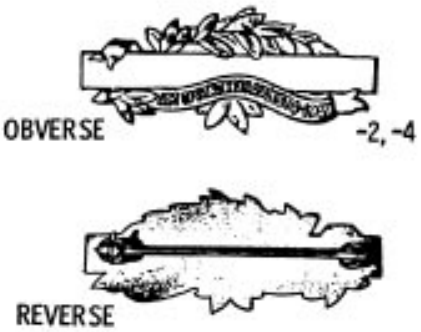

DASH NO.
-1: Silver Life-Saving Medal, Regular Size
-2: Silver Life-Saving Bar, Regular Size
-3: Silver Life-Saving Medal, Miniature Size
-4: Silver Life-Saving Bar, Miniature Size

FINISH: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:51Z
Check the source to verify that this is the current version before use.

MATERIAL:
-1, -3:
PENDANT AND SUSPENSION BAR: 99 Percent Pure Silver
PENDANT SWIVEL, SWIVEL EYE, ATTACHMENT RING AND PENDANT RIBBON ATTACHMENT BAR: Sterling Silver
PIN, HINGE AND CATCH (ON ATTACHMENT BAR): Nickel Silver

-2, -4:
PENDANT AND SUSPENSION BAR: 99 Percent Pure Silver
PIN, HINGE AND CATCH (ON ATTACHMENT BAR): Nickel Silver

DIMENSIONS:
DASH NO. -1, -3:
PENDANT:
DIAMETER:
-1: 1-15/32 inches (3.73 cm) (REF)
-3: 3/4 inch (1.91 cm) (REF)
THICKNESS (At Rim):
-1: 0.120 inch ± 0.010 inch (0.305 cm ± 0.025 cm)
-3: 0.080 inch ± 0.010 inch (0.203 cm ± 0.025 cm)

SUSPENSION BAR:
HEIGHT (Overall):
-1: 15/16 inch (2.38 cm) (REF)
-3: 1/2 inch (1.27 cm) (REF)
WIDTH (Overall):
-1: 1-9/16 inches (3.97 cm) (REF)
-3: 25/32 inch (1.98 cm) (REF)
THICKNESS (At Thickest Point):
-1, -3: 0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)

DASH NO. -2, -4:
HEIGHT (Overall):
-2: 9/16 inch (1.43 cm) (REF)
-4: 9/32 inch (0.71 cm) (REF)
WIDTH (Overall):
-2: 1-21/32 inches (4.21 cm) (REF)
-4: 53/64 inch (2.10 cm) (REF)
THICKNESS (At Thickest Point):
-2, -4: 0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)

WEIGHT (Minimum):

-1 (PENDANT AND SUSPENSION BAR ONLY, ASSEMBLED):	560 Grains
-2 (INCLUDING ATTACHING DEVICE):	144 Grains
-3 (PENDANT AND SUSPENSION BAR ONLY, ASSEMBLED):	270 Grains
-4 (INCLUDING ATTACHING DEVICE):	80 Grains

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Thickness is given for information only. Weight governs.

3. The suspension bar ring shall be fabricated from 0.050 inch ± 0.002 inch (0.127 cm ± 0.005 cm) nominal diameter wire for Dash No. -1 and 0.032 inch ± 0.002 inch (0.081 cm ± 0.005 cm) nominal diameter wire for Dash No. -3. The rings shall be soldered to the vertical center line of the suspension bar 5/32 inch ± 1/64 inch (0.40 cm ± 0.04 cm) above the tip of the eagle's beak for Dash No. -1 and 5/64 inch ± 1/64 inch (0.20 cm ± 0.04 cm) for Dash No. -3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:51Z
Check the source to verify that this is the current version before use.

4. The swivel eye ring shall be fabricated from 0.044 inch ± 0.002 inch (0.112 cm ± 0.005 cm) nominal diameter wire for Dash No. -1 and 0.030 inch ± 0.002 inch (0.076 cm ± 0.005 cm) nominal diameter wire for Dash No. -3. The rings shall be swaged in the swivel device.

5. The swivel device shall be hard soldered to the top of the pendant.

6. The ribbon attachment bar shall conform to Type III Ribbon Bar as shown on TIOH Drawing 4-4-86.

7. The pin and catch attaching device for Dash Nos. -2 and -4 shall be located on and soldered to the horizontal center line equidistant from each side. The attaching device shall be 1-5/8 inch ± 1/64 inch (4/13 cm ± 0.04 cm) for Dash No. -2 and 13/16 inch ± 1/64 inch (2.06 cm ± 0.04 cm) for Dash No. -4.

8. Decoration set shall consist of a regular size medal and bar, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/135.

10. The lapel button shall conform to MIL-DTL-11484/8.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Coast Guard - CG
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:51Z
Check the source to verify that this is the current version before use.