NOT MEASUREMENT SENSITIVE


MIL-D-3943/24C
20 March 1991
SUPERSEDING
MIL-D-3943/24B
31 March 1987

MILITARY SPECIFICATION SHEET


Decoration, Purple Heart

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

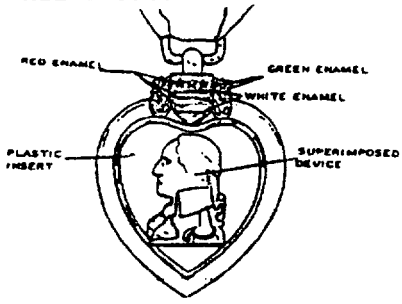

OBVERSE



REVERSE

MATERIAL: Gilding metal
BASE: Gilding metal
DEVISE (Shield): Gilding metal
DEVISE (Profile): Red brass
HEART INSERT: Purple plastic

DASH NO:
-1: Regular size
-2: Minature size

DIMENSIONS (inches)

BASE:
HEIGHT:
-1: (Including lug): 1-7/8 (REF)
-2: (Including lug and Pendant Ribbon ring): 29/32 (REF)
WIDTH (Overall):
-1: 1-3/8 (REF)
-2: 3/4 (REF)
THICKNESS:
-1: (On profile platform): .160 (REF).
-2: (On shield): .110 (REF)

DEVICE (Profile):
HEIGHT (Overall):
-1: 13/16 (REF)
-2: 11/32 (REF)
WIDTH (Overall):
-1: 9/16 (REF)
-2: 1/4 (REF)
THICKNESS (at thickest point)
-1: .070 ± .005
-2: .055 ± .005

PLASTIC INSERT:
HEIGHT:
-1: 1-3/32 (REF)
-2: 9/16 (REF)
THICKNESS (Min at center):
-1: .055 ± .005
-2: .055 ± .005
WIDTH (Overall):
-1: 1 (REF)
-2: 1/2 (REF)
THICKNESS (Assembled):
-1: .240 ± .010
-2: .225 ± .010
DEVICE (Shield)(See Note 11):
HEIGHT (Overall)
-1: 3/8 (REF)
WIDTH (Overall):
-1: 5/32 (REF)
THICKNESS (At thickness point):
-1: .031 ± .005

FINISH:
BASE: Hard enameled, gold plated, matte finish.
DEVICE (Profile): Gold plated, matte finish
DEVICE (Shield): Hard enameled, gold plated, matte finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. Profile device on decorations shall be attached to base by means of two drive pins having a minimum length of 1/8 inch (0.32 cm). Drive pins shall be located on vertical centerline of device, equidistant from the ends and shal be soldered, swaged or extruded as an integral part of the profile. Drive pins shall not protrude or be noticable on reverse of medal.
2. The shield device shall be attached to the base using soft solder.
3. Pendant ribbon ring for Dash No. 1 shall be formed from 0.57 inch ± .002 inch (0.144 cm ± 005 cm) diameter brass wire and shall have a rectangular design and an outside dimension of 15/32 inch ± 1/32 inch (1.19 cm ± 0.08 cm) in width and 11/32 inch ± 1/32 inch (0.87 ± 0.08 cm) in height.
4. Lug for Dash No. 1 shall not be completely drilled through but shall be drilled in a minimum of 1/16 inch (0.16 cm) from each side. The hole shall be 1/16 inch, + 1/32 inch, -0 inch, (0.16 cm + 0.08 cm -0) in diameter.
5. Plastic insert shall be glued in place using cellulose ester cement.
6. Enamel may be used in place of plastic insert for Dash No. 2.
7. Enameled areas shall be as indicated. The enamel color shall conform to TIOH Chip No. Listed below are the standard sample.
8. Type 1 decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforing to MIL-C-14633, Style 6, Type VIII with, A Class 111 of 1A pad.
9. The ribbon for the pendant drape and service ribbon shall conform to MIL-111589/126.
10. The lapel button shall conform to MIL-L-11484/18.
11. The shield device for Dash No. 2 is an integral part of the base.
12. The following shall be used from metric conversion.

INCH	CENTIMETER
1-7/8	4.76
1-3/8	3.49
1-3/32	2.78
1	2.54
13/16	2.06
3/4	1.91
9/16	1.43
1/2	1.27
11/32	0.87
1/4	.64
5/32	.40
.240	0.609
.225	0.571
.070	0.177
.055	0.139
.031	0.078
.005	0.012

Custodian:
Army - IH
Air Force - 11
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
Air Force - 82,99
Navy - MC
Other - CT

(Projected No. 8455-0584)

User activity:
Air Force - 45
Navy - CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.