NOT MEASUREMENT SENSITIVE


MIL-D-3943/24D
12 June 1992
SUPERSEDING
MIL-D-3943/24C
30 March 1991

# MILITARY SPECIFICATION SHEET

## DECORATION, PURPLE HEART

This specification is approved for use by all Departments and Agencies of the Department of Defense

**The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.**

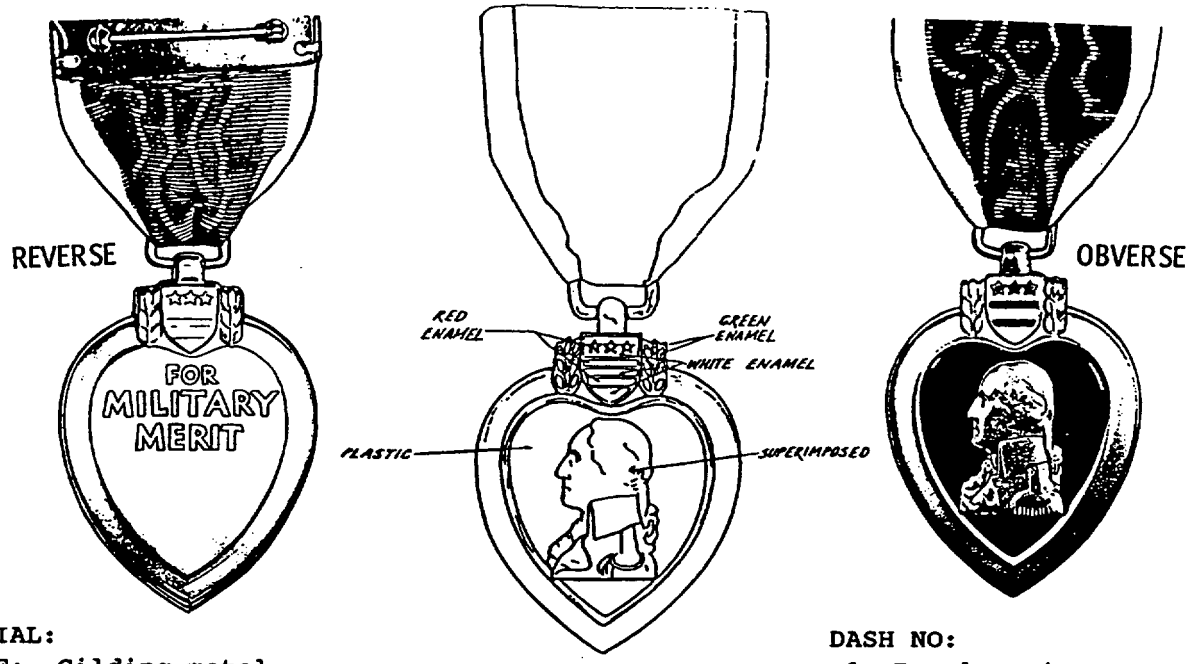


**MATERIAL:**
- **BASE:** Gilding metal
- **DEVISE (Shield):** Gilding metal
- **DEVISE (Profile):** Red brass
- **HEART INSERT:** Purple plastic

**DASH NO:**
- **-1:** Regular size
- **-2:** Miniature size

**FINISH:**
- **BASE:** Hard Enameled, Gold Plated, Matte Finish
- **DEVICE (Profile):** Gold Plated, Matte Finish
- **DEVICE (Shield):** Hard Enameled, Gold Plated, Matte Finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:

HEIGHT:

-1: (Including lug): 1-7/8 inches (4.76 cm) (REF)

-2: (Including lug and Pendant Ribbon ring): 29/32 inch (2.30 cm) (REF)

WIDTH (Overall):

-1: 1-3/8 inches (3.49 cm) (REF)

-2: 3/4 inch (1.91 cm) (REF)

THICKNESS:

-1: (On profile platform): 0.160 inch ± 0.005 inch (0.406 cm ± 0.012 cm)

-2: (On shield): 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)

DEVICE (Profile):

HEIGHT (Overall):

-1: 13/16 inch (2.06 cm) (REF)

-2: 11/32 inch (0.87 cm) (REF)

WIDTH (Overall):

-1: 9/16 inch (1.43 cm) (REF)

-2: 1/4 inch (0.64 cm) (REF)

THICKNESS (At Thickest Point)

-1: 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm)

-2: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

PLASTIC INSERT:

HEIGHT:

-1: 1-3/32 inches (2.78 cm)(REF)

-2: 9/16 inch (1.43 cm)(REF)

THICKNESS (Minimum at center):

-1: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

-2: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

WIDTH (Overall):

-1: 1 inch (2.54 cm) (REF)

-2: 1/2 inch (1.27 cm) (REF)

THICKNESS (Assembled):

-1: 0.240 inch ± 0.010 inch (0.610 cm ± 0.025 cm)

-2: 0.225 inch ± 0.010 inch (0.571 cm ± 0.025 cm)

DEVICE (Shield)(See Note 11):

HEIGHT (Overall)

-1: 3/8 inch (0.95 cm) (REF)

WIDTH (Overall):

-1: 5/32 inch (0.40 cm) (REF)

THICKNESS (At thickness point):

-1: 0.031 inch ± 0.005 inch (0.787 cm ± 0.012 cm)

NOTES:

1. Profile device on decorations shall be attached to base by means of two drive pins having a minimum length of 1/8 inch (0.32 cm). Drive pins shall be located on vertical centerline of device, equidistant from the ends and shall be soldered, swaged or extruded as an integral part of the profile. Drive pins shall not protrude or be noticeable on reverse of medal.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

2. The shield device shall be attached to the base using soft solder.

3. The enamel colors shall be as indicated. The color shall conform to TIOH Color Chip Numbers listed below or the standard sample.

| COLOR | CHIP NO. |
|---|---|
| Red | 1 |
| Green | 12 |
| Purple | 22 |
| White | 28 |

4. Pendant ribbon ring for Dash No. 1 shall be formed from 0.57 inch ± .002 inch (0.144 cm ± 005 cm) diameter brass wire and shall have a rectangular design and an outside dimension of 15/32 inch ± 1/32 inch (1.19 cm ± 0.08 cm) in width and 11/32 inch ± 1/32 inch (0.87 ± 0.08 cm) in height.

5. Lug for Dash No. 1 shall not be completely drilled through but shall be drilled in a minimum of 1/16 inch (0.16 cm) from each side. The hole shall be 1/16 inch + 1/32 inch -0 inch, (0.16 cm + 0.08 cm -0) in diameter.

6. Plastic insert shall be glued in place using cellulose ester cement.

7. Enamel may be used in place of plastic insert for Dash No. 2.

8. Type 1 decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Style 6, Type VIII with, A Class 111 of 1A pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/126.

10. The lapel button shall conform to MIL-L-11484/18.

11. The shield device for Dash No. 2 is an integral part of the base.

12. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodian:
Army - IH
Navy - NU
Air Force - 11

Preparing Activity:
Army - IH

Review Activity:
Air Force - 82,99
Navy - MC
Other - CT

(Project No. 8455-0669)

User activity:
Air Force - 45
Navy - CG



Source: https://assist.dla.mil Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.