NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/24F
1 May 1997
SUPERSEDING
MIL-D-3943/24E
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, PURPLE HEART

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

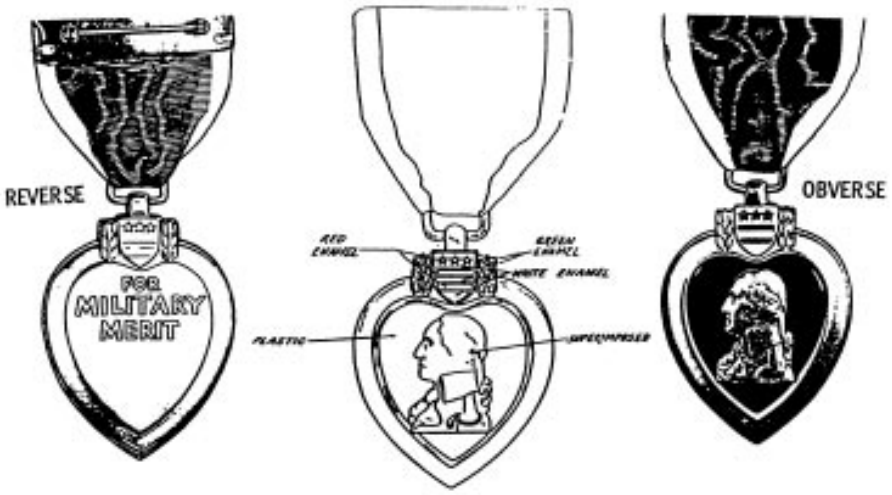

MATERIAL:
- BASE: Gilding Metal
- DEVISE (Shield): Gilding Metal
- DEVISE (Profile): Red Brass
- HEART INSERT: Purple Plastic

DASH NO:
-1: Regular Size
-2: Miniature Size

FINISH:
- BASE: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
- DEVICE (Profile): Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
- DEVICE (Shield): Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
- HEART INSERT: Mirror-like Polished.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE:

HEIGHT:

-1 (Including Lug): 1-7/8 inches (4.76 cm) (REF)

-2 (Including Lug and Pendant Ribbon Ring): 29/32 inch (2.30 cm) (REF)

WIDTH (Overall):

-1: 1-3/8 inches (3.49 cm) (REF)

-2: 3/4 inch (1.91 cm) (REF)

THICKNESS:

-1: (On Profile Platform): 0.160 inch ± 0.005 inch (0.406 cm ± 0.012 cm)

-2: (On Shield): 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)

DEVICE (Profile):

HEIGHT (Overall):

-1: 13/16 inch (2.06 cm) (REF)

-2: 11/32 inch (0.87 cm) (REF)

WIDTH (Overall):

-1: 9/16 inch (1.43 cm) (REF)

-2: 1/4 inch (0.64 cm) (REF)

THICKNESS (At Thickest Point)

-1: 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm)

-2: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

PLASTIC INSERT:

HEIGHT:

-1: 1-3/32 inches (2.78 cm)(REF)

-2: 9/16 inch (1.43 cm)(REF)

THICKNESS (Minimum at Center):

-1: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm) tapering at edge to 0.020 inch (0.050 cm) maximum

-2: 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

WIDTH (Overall):

-1: 1 inch (2.54 cm) (REF)

-2: 1/2 inch (1.27 cm) (REF)

DEVICE (Shield)(See Note 11):

HEIGHT (Overall)

-1: 3/8 inch (0.95 cm) (REF)

WIDTH (Overall):

-1: 5/32 inch (0.40 cm) (REF)

THICKNESS (At Thickest Point):

-1: 0.031 inch ± 0.005 inch (0.787 cm ± 0.012 cm)

ASSEMBLED THICKNESS:

-1: 0.230 inch ± 0.010 inch (0.584 cm ± 0.025 cm)

-2: 0.225 inch ± 0.010 inch (0.571 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Profile device on decorations shall be attached to the base by means of two drive pins having a minimum length of 1/8 inch (0.32 cm). Drive pins shall be located on the vertical center line of the device, equidistant from each end and shall be soldered, swaged or extruded as an integral part of the profile. Drive pins shall not protrude or be noticeable on reverse of medal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

3. The shield device shall be attached to the base using soft solder.

4. Enamel colors shall be as indicated. The colors shall conform to TIOH Color Chip Numbers listed below or the standard sample.

COLOR	CHIP NO.
Red	4
Green	11
Purple	22
White	28

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. Pendant ribbon ring for Dash No. -1 shall be formed from 0.57 inch ± .002 inch (0.144 cm ± 005 cm) diameter brass wire and shall have a rectangular design and an outside dimension of 15/32 inch ± 1/32 inch (1.19 cm ± 0.08 cm) in width and 11/32 inch ± 1/32 inch (0.87 ± 0.08 cm) in height.

7. Lug for Dash No. -1 shall not be completely drilled through but shall be drilled in a minimum of 1/16 inch (0.16 cm) from each side. The hole shall be 1/16 inch + 1/32 inch -0 inch, (0.16 cm + 0.08 cm -0) in diameter.

8. When glued in place, the color of the plastic insert shall match Purple, Cable No. HP 67115 from the Department of Defense Standard Shades of Heraldic Yarns for Embroidery and Ribbons (1993 Edition).

9. Plastic insert shall be glued in place using cellulose ester cement.

10. Enamel may be used in place of plastic insert for Dash No. -2.

11. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

12. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/126.

13. The lapel button shall conform to MIL-DTL-11484/18.

14. The shield device for Dash No. -2 is an integral part of the base.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.