NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/24M
17 November 2023
SUPERSEDING
MIL-DTL-3943/24L
28 May 2021

DETAIL SPECIFICATION SHEET

DECORATION, PURPLE HEART

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

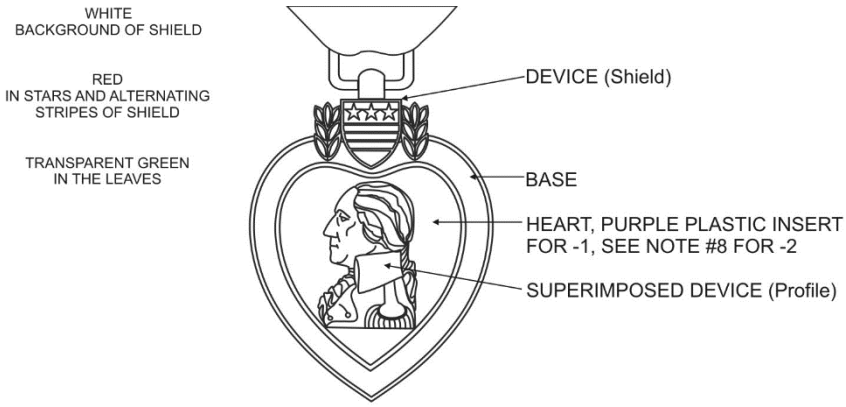

OBVERSE



REVERSE

DASH NO:
-1: Regular Size
-2: Miniature Size

MATERIAL:
BASE: Gilding Metal 95/5 (UNS Alloy No. C-210)
DEVICE (Shield): Gilding Metal 95/5 (UNS Alloy No. C-210)
DEVICE (Profile): Red Brass 85/15 (UNS Alloy No. C-230)
HEART INSERT
-1: Purple Plastic
-2: Purple Plastic or Enamel

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:52Z
Check the source to verify that this is the current version before use.

FINISH:
BASE: Epoxy resin, 24K Gold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.
DEVICE (Shield): Epoxy resin, 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
DEVICE (Profile): 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
HEART INSERT: Mirror-like Polished.

DIMENSIONS:
BASE:
HEIGHT:
-1: (Including lug): 1-7/8 inches (REF)
-2: (Including lug and pendant ribbon ring): 29/32 inch (REF)
WIDTH (Overall):
-1: 1-3/8 inches (REF)
-2: 3/4 inch (REF)
THICKNESS:
-1: (On profile platform): 0.160 inch ± 0.005 inch
-2: (On shield): 0.110 inch ± 0.005 inch
DEVICE (Shield):
HEIGHT (Overall)
-1: 3/8 inch (REF)
WIDTH (Overall):
-1: 5/16 inch (REF)
THICKNESS (At thickest point):
-1: 0.031 inch ± 0.005 inch

DEVICE (Profile):
HEIGHT (Overall):
-1: 13/16 inch (REF)
-2: 11/32 inch (REF)
WIDTH (Overall):
-1: 9/16 inch (REF)
-2: 1/4 inch (REF)
THICKNESS (At thickest point)
-1: 0.070 inch ± 0.005 inch
-2: 0.055 inch ± 0.005 inch
PLASTIC INSERT:
HEIGHT:
-1: 1-3/32 inches (REF)
-2: 9/16 inch (REF)
THICKNESS (Minimum at center):
-1: 0.055 inch ± 0.005 inch tapering at edge to 0.020 inch maximum
-2: 0.055 inch ± 0.005 inch
WIDTH (Overall):
-1: 1 inch (REF)
-2: 1/2 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:52Z
Check the source to verify that this is the current version before use.

ASSEMBLED THICKNESS:
-1: 0.275 inch ± 0.010 inch
-2: 0.225 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Profile device shall be attached to the base by means of two drive pins having a minimum length of 1/8 inch. Drive pins shall be located on the vertical center line of the device, equidistant from each end and shall be soldered, swaged or extruded as an integral part of the profile. Drive pins shall not protrude or be noticeable on reverse of medal.

3. The shield device shall be attached to the base using soft solder.

4. The shield device for -2 is an integral part of the base.

5. When glued in place, the color of the plastic insert shall match Purple, Cable No. HP 67115 from the Department of Defense Standard Shades of Heraldic Yarns for Embroidery and Ribbons (1993 Edition).

6. Plastic insert shall be glued in place using cellulose ester cement.

7. Enamel may be used in place of plastic insert for -2. When hard enamel is used, the material requirement shall be gilding metal. Enamel color shall be purple and enamel color shall conform to TIOH Hard Enamel Color Chip Number 22.

8. Pendant ribbon ring for -1 shall be formed from 0.57 inch ± .002 inch diameter brass wire and shall have a rectangular design and an outside dimension of 15/32 inch ± 1/32 inch in width and 11/32 inch ± 1/32 inch in height.

9. Lug for -1 shall not be completely drilled through but shall be drilled in a minimum of 1/16 inch from each side. The hole shall be 1/16 inch + 1/32 inch -0 inch, in diameter.

11. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/126.

12. The specification slash sheet for the lapel button is MIL-DTL-11484/18.

13. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:52Z
Check the source to verify that this is the current version before use.

EPOXY: The shield device epoxy resin shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Green	#11
White	#28

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, SA, CG1
DLA - CT

(Project No. 8455-2024-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:52Z
Check the source to verify that this is the current version before use.