NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/26E
1 May 1997
SUPERSEDING
MIL-D-3943/26D
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, JOINT SERVICE COMMENDATION MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

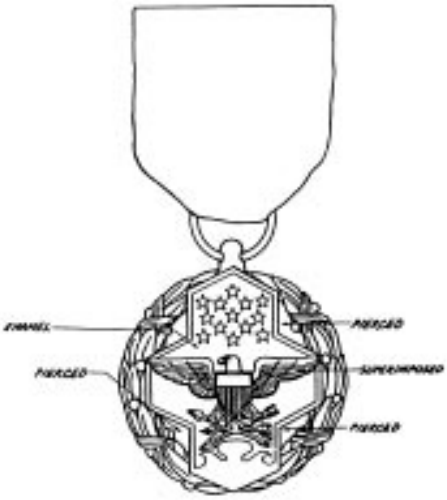

MATERIAL: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:

OBVERSE:

BASE: Hard Enameled, Gold Plated, Rose Gold Plated, Area Below Device Mirror-like Polished.

DEVICE: Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

REVERSE: Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:

-1: 1-5/8 inches (4.13 cm) (REF)
-2: 13/16 inch (2.06 cm) (REF)

HEIGHT (Including Lug):

-1: 1-3/4 inches (4.45 cm) (REF)
-2: 7/8 inch (2.22 cm) (REF)

THICKNESS (At edge of enameled area):

-1: 0.120 inch ± 0.005 inch (0.304 cm ± 0.012 cm)
-2: 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

THICKNESS (DEVICE):

-1: 0.105 inch (0.267 cm) (REF)
-2: 0.085 inch (0.216 cm) (REF)

TOTAL OVERALL THICKNESS:

-1: 0.225 inch ± 0.010 inch (0.572 cm ± 0.025 cm)
-2: 0.165 inch ± 0.010 inch (0.419 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The device shall be soft soldered or riveted to the base by a solid brass rivet. The rivet may be extruded as an integral part of the device.

4. If a rivet is to be used to attach the device to the base, the length of the rivet shall be controlled to insure no deformation occurs on the reverse of the pendant.

5. The enamel color shall be green and conform to TIOH Color Chip No. 12 or the standard sample.

6. When using a rivet to attach the device to the base, epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

7. After finishing, the entire pendant shall be lacquered.

8. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XVI with a Type XVI, Class 1 or 3 pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/77.

10. The lapel button shall conform to MIL-DTL-11484/19.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

Air Force - 45
Navy - NU

Review activities: (Project No. 8455-0887)
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.