NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/26F
11 May 1999
SUPERSEDING
MIL-DTL-3943/26E
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, JOINT SERVICE COMMENDATION MEDAL

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

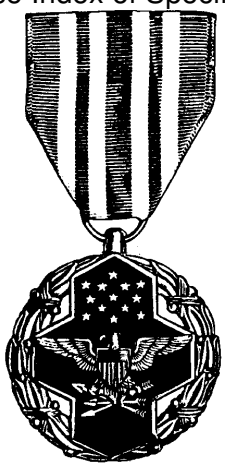

OBVERSE

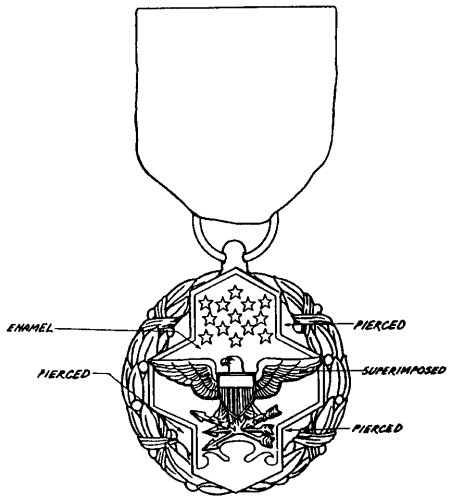

REVERSE

MATERIAL: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:

OBVERSE:
BASE: Hard Enameled, Gold Plated, Rose Gold Plated, Area Below Device Mirror-like Polished.
DEVICE: Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.
REVERSE: Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)
HEIGHT (including lug):
-1: 1-3/4 inches (REF)
-2: 7/8 inch (REF)
THICKNESS (at edge of enameled area):
-1: 0.120 inch ± 0.005 inch
-2: 0.080 inch ± 0.005 inch
THICKNESS (device):
-1: 0.105 inch (0.267 cm) (REF)
-2: 0.085 inch (0.216 cm) (REF)
TOTAL OVERALL THICKNESS:
-1: 0.225 inch ± 0.010 inch
-2: 0.165 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The device shall be soft soldered or riveted to the base by a solid brass rivet. The rivet may be extruded as an integral part of the device.

4. If a rivet is to be used to attach the device to the base, the length of the rivet shall be controlled to ensure no deformation occurs on the reverse of the pendant.

5. The enamel color shall be green and conform to TIOH Hard Enamel Color Chip No. 12.

6. When using a rivet to attach the device to the base, epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

7. After finishing, the entire pendant shall be lacquered.

8. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XVI with a Type XVI, Class 1 or 3 pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/77.

10. The lapel button shall conform to MIL-DTL-11484/19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.