INCH-POUND


MIL-DTL-3943/26H
5 October 2015
SUPERSEDING
MIL-DTL-3943/26H
10 September 2007

DETAIL SPECIFICATION SHEET


DECORATION, JOINT SERVICE COMMENDATION MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

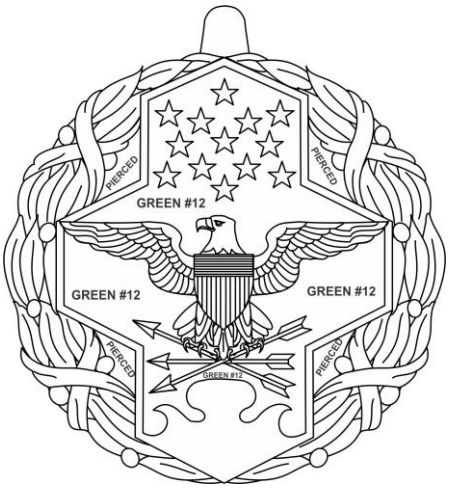

OBVERSE

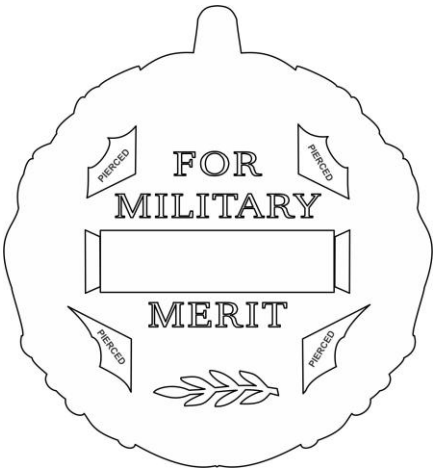

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
OBVERSE:
BASE: Epoxy resin, 24K Gold Plated, Matte Finish and shall match the Institute of Heraldry (TIOH) Metal Finish Chip Number 7. Area below Device and star above 24K Gold Plated Mirror-like Polished and shall Match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

DEVICE: 24K Gold Plated Matte Finish and shall match (TIOH) Metal Finish Chip Number 7.
REVERSE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
DIAMETER:
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)
HEIGHT (Including lug):
-1: 1-3/4 inches (REF)
-2: 7/8 inch (REF)
THICKNESS (At edge of enameled area):
-1: 0.120 inch ± 0.005 inch
-2: 0.080 inch ± 0.005 inch
THICKNESS (Device):
-1: 0.105 inch (0.267 cm) (REF)
-2: 0.085 inch (0.216 cm) (REF)
TOTAL OVERALL THICKNESS:
-1: 0.225 inch ± 0.010 inch
-2: 0.165 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type XVI with a Type XVI, Class 1 or 3 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The device shall be soft soldered or riveted to the base by a solid brass rivet. The rivet may be extruded as an integral part of the device.

4. If a rivet is to be used to attach the device to the base, the length of the rivet shall be controlled to ensure no deformation occurs on the reverse of the pendant.

5. The epoxy resin color shall be green and conform to TIOH Hard Enamel Color Chip Number 12.

6. When using a rivet to attach the device to the base, epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

7. After finishing, the entire pendant shall be lacquered.

8. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/77.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

9. The specification slash sheet for the lapel button is MIL-DTL-11484/19.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 99
Navy - MC
Coast Guard - CG1
DLA - CT

(Project No. 8455-2015-538)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.