INCH-POUND


MIL-DTL-3943/26J
7 July 2016
SUPERSEDING
MIL-DTL-3943/26H
5 October 2015

DETAIL SPECIFICATION SHEET

DECORATION, JOINT SERVICE COMMENDATION MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

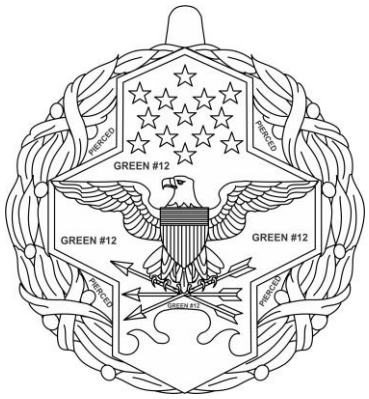

OBVERSE



REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
OBVERSE:
BASE: Hard Enameled, Gold Plated, Rose Gold Plated, Area Below Device Mirror-like Polished
DEVICE: Gold Plated, Rose Gold Plated and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 19
REVERSE: Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER:
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)
HEIGHT (Including lug):
-1: 1-3/4 inches (REF)
-2: 7/8 inch (REF)
THICKNESS (At edge of enameled area):
-1: 0.120 inch ± 0.005 inch
-2: 0.080 inch ± 0.005 inch
THICKNESS (Device):
-1: 0.105 inch (0.267 cm) (REF)
-2: 0.085 inch (0.216 cm) (REF)
TOTAL OVERALL THICKNESS:
-1: 0.225 inch ± 0.010 inch
-2: 0.165 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type XVI with a Type XVI, Class 1 or 3 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The device shall be soft soldered or riveted to the base by a solid brass rivet. The rivet may be extruded as an integral part of the device.

4. If a rivet is to be used to attach the device to the base, the length of the rivet shall be controlled to ensure no deformation occurs on the reverse of the pendant.

5. When using a rivet to attach the device to the base, epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.
6. After finishing, the entire pendant shall be lacquered.

7. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/77.

8. The specification slash sheet for the lapel button is MIL-DTL-11484/19.

9. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#12

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2016-577)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:53Z
Check the source to verify that this is the current version before use.