NOT MEASUREMENT SENSITIVE


MIL-D-3943/28D
7 August 1991
SUPERSEDING
MIL-D-3943/28C
28 February 1990

MILITARY SPECIFICATION SHEET

DECORATION, NAVY COMMENDATION MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

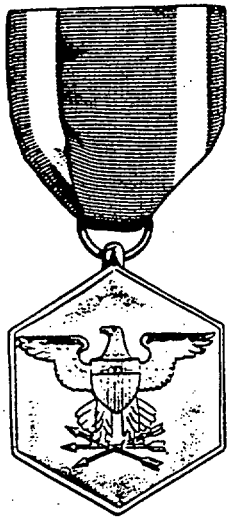

OBVERSE



REVERSE

MATERIAL: Red Brass

DASH NO.
-1: Regular size
-2: Miniature size

DIMENSIONS:

HEIGHT (INCLUDING LUG):
-1: 1-3/4 inches (4.45 cm) (REF)
-2: 7/8 inch (2.22 cm) (REF)

WIDTH (OVERALL):
-1: 1-3/8 inch (3.49 cm) (REF)
-2: 11/16 inch (1.75 cm) (REF)

THICKNESS (AT THICKEST POINT):
-1: .145 inch ± .010 inch (0.368 cm ± 0.025 cm)
-2: .125 inch ± .005 inch (0.317 cm ± 0.012 cm)

FINISH: Oxidized, relieved, matte finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:55Z
Check the source to verify that this is the current version before use.

NOTES:

1. Type I decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type XVI with a Type XVI, Class 1 pad.

2. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/100.

3. Lapel button shall conform to MIL-L-11484/21.

4. The use of any type of plastic packaging material is prohibited.

Custodians:
Army - IH
Navy - NU

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-N611)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:55Z
Check the source to verify that this is the current version before use.