NOT MEASUREMENT SENSITIVE


MIL-B-41809/41A
14 May 1990
SUPERSEDING
MIL-B-41809/41
22 June 1989

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, CAP, POLICE, DEFENSE PROTECTIVE SERVICE, DOD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

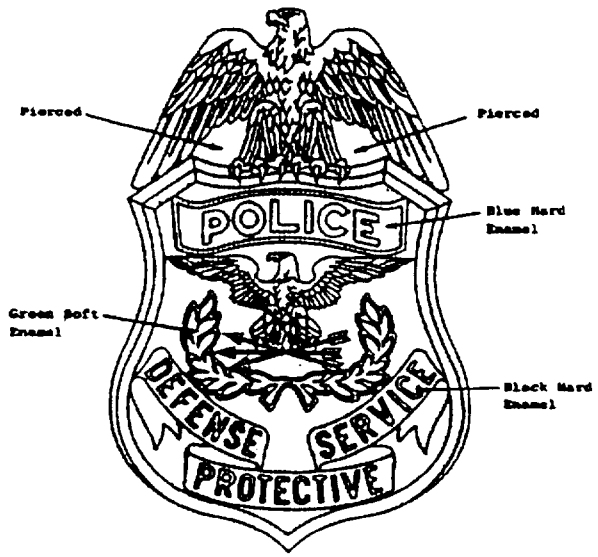

MATERIAL: Gilding metal

DIMENSIONS:
HEIGHT (Overall): 3 inches (7.62 cm) (REF)
THICKNESS (On "Police" lettering): .085 inch ± .010 inch (0.215 cm) ± (0.025 cm)

FINISH: Hard enameled, soft baked enameled, gold plated, matte finish, highlights brightly polished

NOTES:
1. Piercing shall be as indicated.
2. A full force shall be used to bring up the details of the design.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:41Z
Check the source to verify that this is the current version before use.

3. Attaching device shall be a screw post with nut and two registering prongs.
   a. The screw post shall be located on the vertical centerline of the badge 1-3/4 inch (4.45 cm) from bottom of badge.
   b. The registration prongs shall be located on a horizontal line 1/8 inch (0.32 cm) in from the widest portion of the top of the shield on each side.
   c. The screw post shall be 9/16 inch ± 1/32 inch (1.43 cm) ± (0.08 cm) long and have a No. 5-40UNC-2A thread.
   d. The thumb nut shall be .625 inch ± .010 inch (1.584 cm) ± (0.025 cm) in diameter and shall have a No. 5-40UNC-2B thread.
   e. The registering prong shall be 1/4 inch ± 1/64 inch (0.64 cm) ± (0.04 cm) long and .045 inch ± .002 (0.114 cm) ± (0.005 cm) in diameter.
4. Enamel areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
Blue	33
Green	12

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.

Custodian:
Army - IH

Review activity:
DLA - CT

User activity:
Other - DOD

Preparing activity:
Army - IH

(Project No. 8455-0515)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:41Z
Check the source to verify that this is the current version before use.