
NON MEASUREMENT SENSITIVE
MIL-B-41809/42
22 June 1989

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, POLICE,
DEFENSE PROTECTIVE SERVICE, DOD

This specification is approved for use by all Departments and Agencies of the Department of Defense. The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

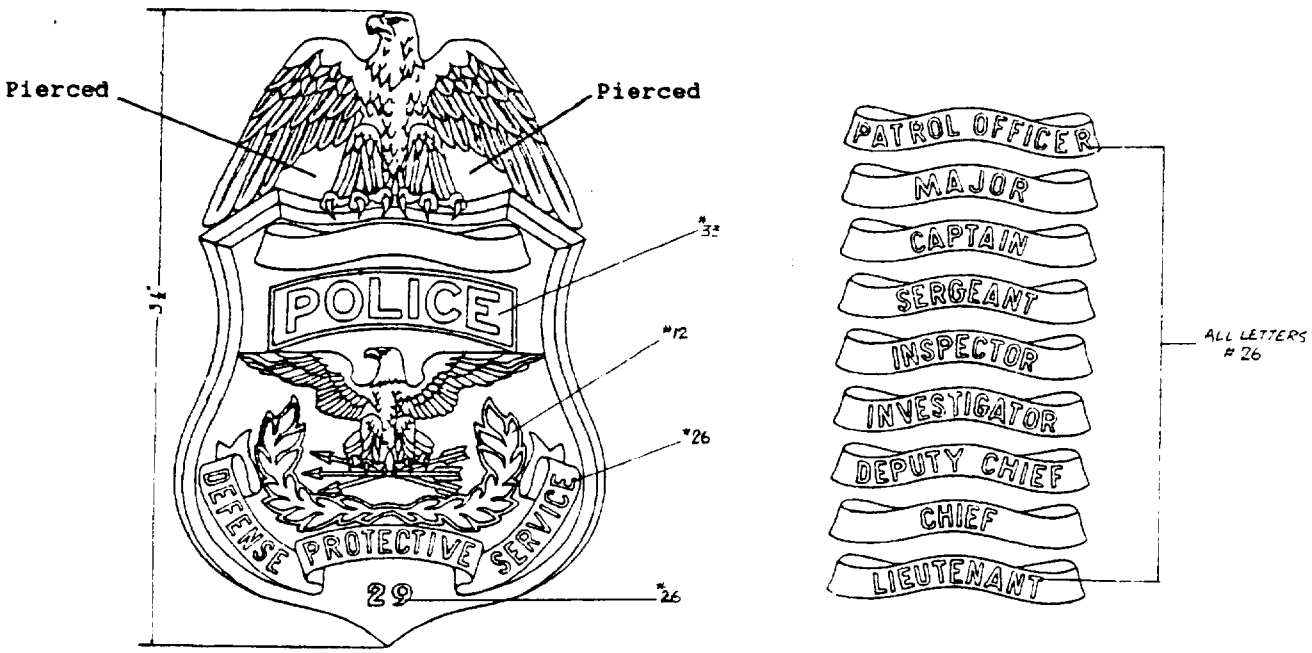

MATERIAL: Gilding metal.
DIMENSION INCHES (METRIC):
HEIGHT (Overall): 3-1/2 (8.89cm) (REF)
THICKNESS (On "Police" lettering): .085 (.215cm) ± .010 (.025cm)

FINISH: ENAMELED, GOLD PLATED, SATIN FINISH WITH HIGHLIGHTS BRIGHTLY POLISHED.

NOTES:
1. A full forcer shall be used to bring up the details of the design and to reduce the weight of the finished badge.
2. The attaching device shall be a coil pin stem device. The joint and catch shall be soldered or fused on the vertical centerline. A pin stem 2-inches (5.09cm) ± 1/16 inch (.16cm) long shall be used. The pin stem shall be .072 inch (.18cm) ± .005 inch (.12cm) in diameter. The joint shall be located 3/4 inch (1.91cm) down from the top of the badge. The catch shall be heavy duty top opening.
3. Enamel shall be as indicated and shall match TIOH Color Chip Numbers #12 Green, #26 Black and #33 Blue.
4. Piercing shall be as indicated.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:41Z
Check the source to verify that this is the current version before use.

5. Scroll lettering for the various badges may be cut into the working die or cut into the badge at the manufacturers option. The lettering shall be as specified in the procurement document. Letters shall be 1/8 inch (.32cm) in height, block style, and enameled to match TIOH Color Chip Number #26 Black.

6. The badge shall be numbered consecutively with the numbers specified in the procurement document. Numbers shall be 1/8 inch (.32cm) high and equally spaced about the vertical centerline and aligned in an arc within the unembossed area provided on the lower obverse side. Numbers shall be filled with #26 Black enamel.

Preparing Activity:
Army - IH

Custodian:
Army - IH

Review Activities:
DLA-CT

(Project No. 8455-0407)

User Activities:
Other - DOD

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:41Z
Check the source to verify that this is the current version before use.