NOT MEASUREMENT SENSITIVE


MIL-B-41809/44
14 June 1991

MILITARY SPECIFICATION SHEET

Badge, Identification, Medical Department Recruiter, Army

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

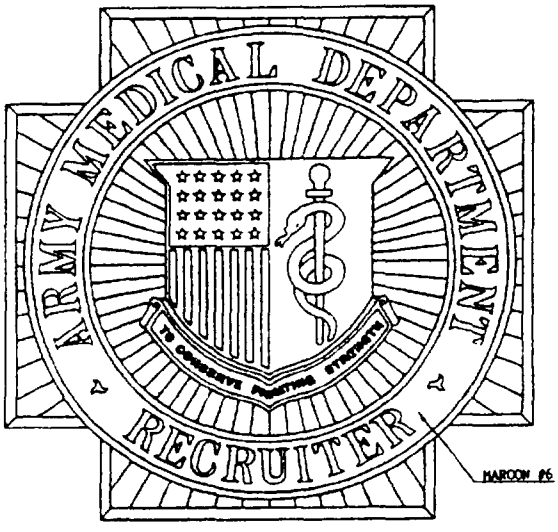

MATERIAL: Gilding metal

DIMENSIONS:
HEIGHT: 2 inches (5.08 cm) (REF)
WIDTH: 2 inches (5.08 cm) (REF)
THICKNESS (At edge): .060 inch ± .010 inch (0.152 cm ± 0.025 cm)

FINISH: Hard enameled, nickel plated, silver plated, oxidized, relieved, matte finish.

NOTES:
1. enameled area shall be as indicated. The enamel color shall be maroon and shall match TIOH color chip No. 6.
2. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer except red brass may be used. The epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.
3. The attaching device shall be three prongs with wing type clutches. One prong shall be located at the intersection of the vertical centerline in a circle 1-11/16 inch (4.29 cm) in diameter with the remaining prongs 120 degrees apart.
4. A full forcer shall be used to bring up the details of the design and reduce the overall weight.

Custodian:
Army - IH

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Projected No. 8455-A601)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:42Z
Check the source to verify that this is the current version before use.