NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/3E
30 September 1996
SUPERSEDING
MIL-R-41819/3D
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, LETTER "V"

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

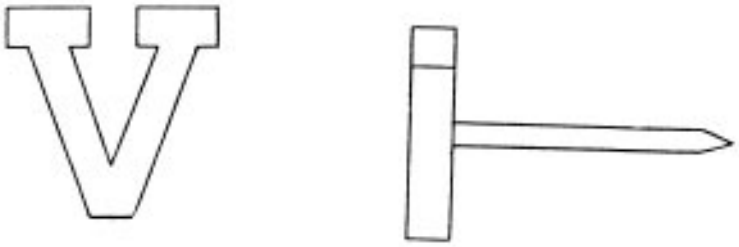

MATERIAL: Red Brass

DASH NO.
-1: Regular Size
-2: Miniature Size

DIMENSIONS:

HEIGHT:
-1: 1/4 inch (0.64 cm) (REF)
-2: 1/8 inch (0.32 cm) (REF)

WIDTH:
-1: 1/4 inch (0.64 cm) (REF)
-2: 1/8 inch (0.32 cm) (REF)

THICKNESS (At Thickest Point):
-1: 0.043 inch ± 0.005 inch (0.109 cm ± 0.012 cm)
-2: 0.031 inch ± 0.005 inch (0.078 cm ± 0.012 cm)

FINISH: Lightly Sand Blasted.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:46Z
Check the source to verify that this is the current version before use.

2. The attaching device shall be a staple type prong. The prong shall be located at the intersections of each leg of the "V" and the horizontal center line.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:46Z
Check the source to verify that this is the current version before use.