NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/5D
30 September 1996
SUPERSEDING
MIL-R-41819/5C
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, SUPERIOR CADET AWARD, ARMY ROTC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

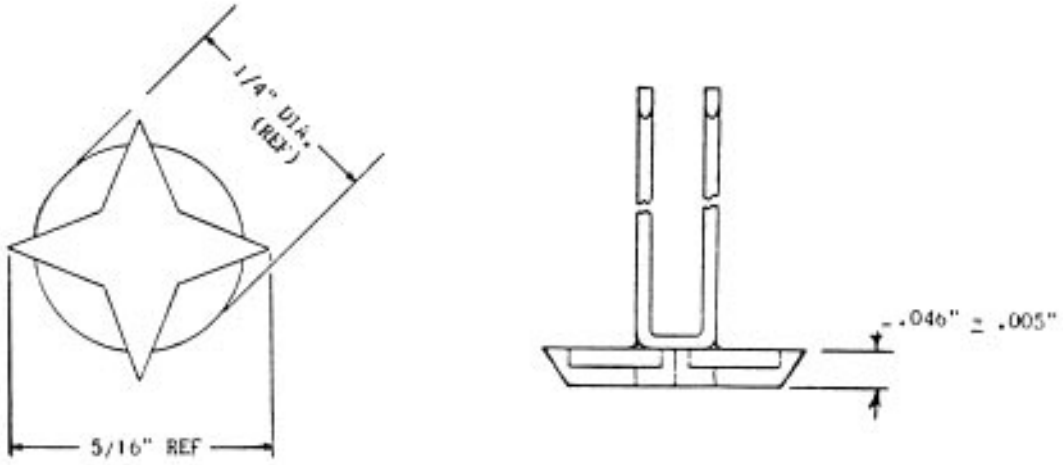

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Polished Highlights (Star) and shall match TIOH Metal Finish Chip Number 15.

DIMENSIONS:
DIAMETER OF CENTER CIRCLE: 1/4 inch (0.64 cm) (REF)
WIDTH (Star Point to Point): 5/16 inch (0.79 cm) (REF)
THICKNESS (At Thickest Point): 0.046 inch ± 0.005 inch (0.117 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:46Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Ribbon attachment is of a one piece design.

3. The attaching device shall be a staple type prong. The prong shall be centered on the reverse side of the ribbon attachment.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:46Z
Check the source to verify that this is the current version before use.