NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/5F
30 December 2020
SUPERSEDING
MIL-DTL-41819/5E
9 March 2016

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, SUPERIOR CADET AWARD, ARMY ROTC

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

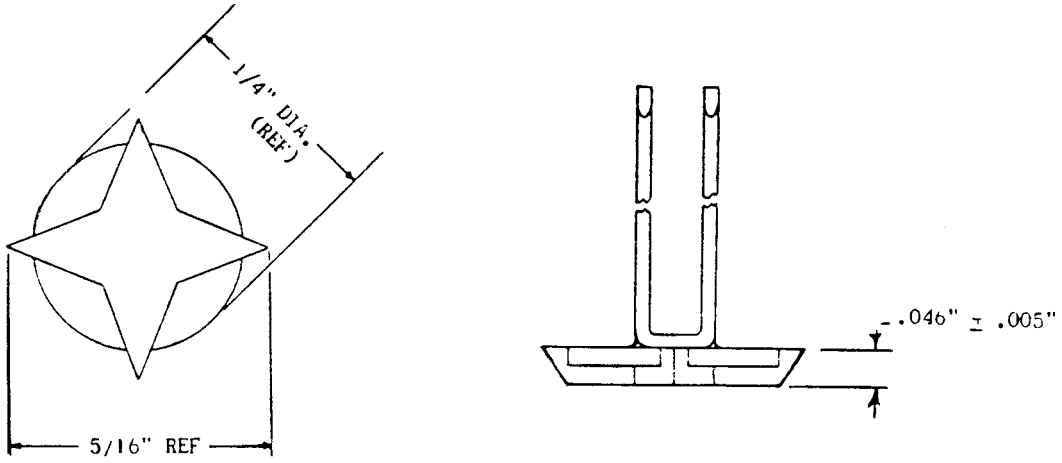

MATERIAL: Red Brass 85/15 (UNS Alloy No.C-230)

FINISH: Silver Plated, Oxidized, Buffed Relieved, Matte Finish, Polished Highlights and shall match The Institute of Heraldry Metal Finish Chip Number 15.

DIMENSIONS:
DIAMETER OF CENTER CIRCLE: 1/4 inch (REF)
WIDTH (Star point to point): 5/16 inch (REF)
THICKNESS (At thickest point): 0.046 inch ± .005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:46Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. The attaching device shall be a staple type prong.

2. The prong shall be centered on the reverse side of the ribbon attachment.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-130)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:46Z
Check the source to verify that this is the current version before use.