NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/6E
30 September 1996
SUPERSEDING
MIL-R-41819/6D
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, ADDITIONAL CIVILIAN AWARDS, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

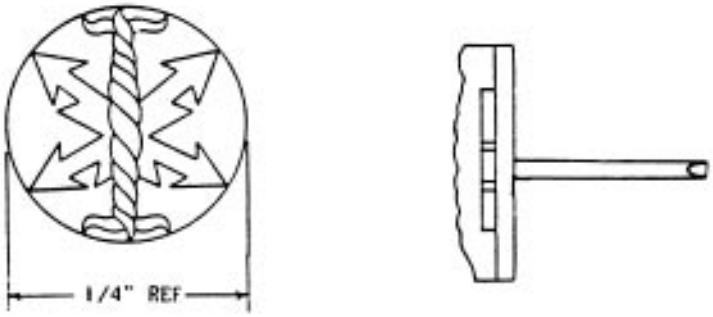

MATERIAL:
-1, -3: Red Brass
-2: Red Brass or Nickel Silver

DASH NO.
-1: Gold
-2: Silver

DIMENSIONS:
DIAMETER: 1/4 inch (0.64 cm) (REF)
THICKNESS (At Thickest Point): 0.063 inch ± 0.005 inch (0.160 cm ± 0.012 cm)

FINISH:
-1: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-2: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be a staple type prong. The prong shall be located on the reverse side of the ribbon attachment and centered on the horizontal center line.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.