INCH-POUND

MIL-DTL-41819/6G
10 January 2018
SUPERSEDING
MIL-DTL-41819/6F
25 February 2013

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, ADDITIONAL CIVILIAN AWARD, U. S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

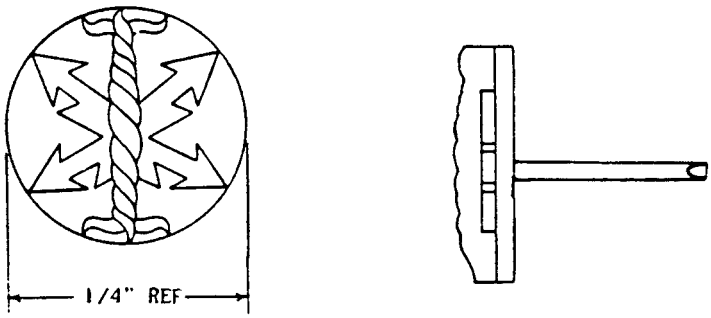

DASH NO.
-1: Gold
-2: Silver

MATERIAL:
-1: Red Brass 85/15 (UNS Alloy No.C-230)
-2: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/15 (UNS Alloy C-752)

FINISH:
-1: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
-2: Nickel Plated (C-230 only) Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:
DIAMETER: 1/4 inch (REF)
THICKNESS (At thickest point): 0.063 inch $\pm$ .005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. The attaching device shall be a staple type prong.

2. The prong shall be located on the reverse side of the ribbon attachment and centered on the horizontal center line.

NOTES:

The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2018-084)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:47Z
Check the source to verify that this is the current version before use.