INCH-POUND

MIL-G-41817E
6 September 1990
SUPERSEDING
MIL-G-41817D
1 September 1982

MILITARY SPECIFICATION

GLOVES, MEN'S, CLOTH, DRESS, WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers white, cloth, men's dress gloves.

1.2 Classification. The gloves shall be in the following sizes as specified (see 6.2):

Schedule of sizes

Small
Medium
Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
JJ-W-155	-	Webbing, Textile, (Cotton, Elastic)
DDD-L-20	-	Label: for Clothing, Equipage, and Tentage, (General Use)
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Boxes Setup
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-40004	-	Cloth, Knitted, Cotton, Simplex

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets
MIL-STD-1612	-	Provisions for Evaluating Quality of Gloves, Cloth, Dress

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY OF TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Fabric, knitted, cotton, simplex. The fabric shall be cotton simplex conforming to type I, class 1 of MIL-C-40004.

3.3.2 Thread. The cotton thread for seaming and stitching shall be white AH, C.A. 66050 and shall conform to type IC1, ticket No. B, 3 ply and ticket No. A, 3 ply of V-T-276.

3.3.3 Elastic webbing. The unbleached elastic webbing shall conform to type II, class 2, 3/8 inch width of JJ-W-155.

3.3.4 Labels.

3.3.4.1 Identification and size label. Each glove shall be marked with a combination identification and size label conforming to type III, IV, or VI, class 4 of DDD-L-20. The label shall withstand fastness to laundering as specified therein.

3.3.4.2 Laundering instruction label. A printed slip of thin paper containing the following laundering instructions shall be inserted in each right-hand glove:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

GLOVES, MEN'S, CLOTH, DRESS, WHITE
LAUNDERING INSTRUCTIONS

Wash gloves in lukewarm water and soap.
Rinse thoroughly.
Do not twist or wring when pressing out water.
Stretch into shape and wrap in towel to dry.

3.4 Design. The design shall be a full inseam, Montpelier pattern, hand trimmed, with continuous fourchette, "Q" type thumb, closed wrist design.

3.5 Figure. Figure 1 is furnished for information purposes only. In the event of any inconsistencies between the written specification and the figure, the specification shall govern.

3.6 Patterns. Standard patterns will be furnished by the Government. The Government patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.6.1 Pattern parts. The pattern parts for the gloves shall be as listed in table I.

TABLE I. Pattern parts

Pattern nomenclature	Cut parts per pair of gloves
Front and back	2
"Q" type thumb	2
Fourchette	2

3.7 Construction.

3.7.1 Stitches, seams and stitchings. Stitches, seams, and stitching types specified in table II shall conform to FED-STD-751. Whenever two or more methods, seams, or stitches are given for the same part of an operation, any one of them may be used. Where stitch type 401 is used, the looper, that is, the under thread, shall be on the inside of the glove. The use of a trimmer attachment on the sewing machines is prohibited. The minimum and maximum number of stitches per inch shall be specified in table II.

3.7.1.1 Types 301 and 304 stitching. Unless otherwise specified, ends of 301 stitching shall be backstitched or overstitched 1/2 minimum except where ends are turned under in a hem or held down by other stitching. Ends of 304 stitching shall be crowded as shown in figure 1. Thread tension shall be maintained so there will be no loose stitching resulting in a loose bobbin or top thread and no excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

3.7.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing area. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. When damaged thread has been removed, needle holes do not constitute damage to the material. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.7.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be made in accordance with 3.7.1.1.1.a. and 3.7.1.1.1.b. Repairs to stitch type 401 may be accomplished by use of stitch type 301.

3.7.2 Manufacturing operations requirements. The glove shall be inseam sewn and shall be made by and with the use of all operations listed in table II. The contractor is not required to follow the exact sequence of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. The gloves shall be cut in accordance with the patterns. All simplex knit parts shall be cut from the same piece of material, with the length of the part running in the wale direction, as indicated on the master patterns.						
2.	Replacement of defective or damaged parts. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1612 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Marking. a. Mark, ticket, or bundle cut parts to insure a uniform shade throughout the glove. b. Any method of marking may be used except: (1) Metal fastening devices (2) Sew-on tickets (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.						
4.	Attaching thumb. Close thumb seam and join thumb to glove by inseaming 1/16 to 3/32 inch from raw edge.	301 or 401	SSa-1 SSa-1	12-16 12-16	B-3 B-3	B-3 A-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Join continuous fourchette to fingers and close side seam.						
	a. Inseam stitch continuously the back of the fingers to the continuous fourchette, 1/16 to 3/32 inch from the edge.	301	SSa-1	12-16	B-3	B-3	
		or 401	SSa-1	12-16	B-3	A-3	
	b. Stitch the fourchette, diagonally across the base of each finger from palm to back, 1/16 to 1/8 inch from edge.	301	SSa-1	12-16	B-3	B-3	
		or 401	SSa-1	12-16	B-3	A-3	
	c. Inseam stitch continuously the front of the fingers to continuous fourchette simultaneously closing the side seam. Check while stitching to insure that the curved tops of each finger are even and that the base of each finger meets at the gore.	301	SSa-1	12-16	B-3	B-3	
		or 401	SSa-1	12-16	B-3	A-3	
6.	Attaching elastic webbing.						
	Stretch a 2 inch length of the elastic webbing to 3 inches, and while held under tension, stitch to inside of palm at wrist 1/4 to 1/2 inch below base of thumb. After stitching, the relaxed elastic webbing shall measure 2 ± 1/4 inches in length. Tack both ends of the webbing to prevent ravelling. One of the following methods of stitching shall be used:						
	a. Stitch over full length of stretched webbing using a 1/4 inch gauge zig-zag stitch	304	-	28-36 (total)	B-3	B-3	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Attaching elastic webbing. (cont'd)						
	b. Stitch over full length of stretched webbing so as to make a uniform, 1/4 inch wide, zig-zag stitch pattern having a total fo 15 to 20 points. NOTE: A "point" is one "V" shaped unit of zig-zag pattern.	301	-	6-8 (stitches per point)	B-3	B-3	
7.	Hemming.						
	Hemming operation shall be performed after closing operation. Turn raw edge at wrist 1/4 ± 1/16 inch to the inside and stitch 1/16 to 3/32 inch from raw edge.	301 or 401	EFa-1 EFa-1	12-16 12-16	B-3 B-3	B-3 A-3	
8.	Labeling.						
	a. The type III or IV combination identification and size label shall be applied to the inside center back of wrist just above the hem. The marking shall not show on the outside of the glove.						
	or						
	If a type VI label is used, attach at center of back of wrist by catching the bottom of label in hem stitching.						
	b. Insert one paper instruction label in each right hand glove (see 3.3.4.2).						
9.	Turn glove.						
	The glove shall be turned right side out.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Laying-off. The gloves shall be dampened or humidified, and then layed-off on the proper size, fingered laying boards heated to not less than 125°F.						
11.	Trimming and cleaning. Remove all spots, stains, and loose ends. Trim thread ends.						
12.	Pairing. The gloves shall be matched, paired, and tacked together with a cord thread which will permit the gloves to be pulled apart without tearing the cloth. The tack shall be 3/4 to 1-1/4 inches from the hem, and not more than 1/4 inch from the closing seam. The tacking shall be done with not less than two stitches per tack.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished gloves (after laying-off) shall conform to the measurements in table III. Measurements A and B shall be made as indicated on figure 1.

TABLE III. Finished measurements.

Size	A - Width inches	B - Overall Length inches
Small	3-3/4 ± 1/8	10-3/4 ± 3/8
Medium	3-7/8 ± 1/8	11-1/8 ± 3/8
Large	4 ± 1/8	11-1/4 ± 3/8

3.9 Workmanship. The finished gloves shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point values.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not aurthorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in MIL-STD-1612.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Point count inspection. Sampling and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1612.

4.4.3 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

5.1.1 Level A preservation.

5.1.1.1 Unit packing. Each pair of gloves shall be inserted in a flat-style clear polyethylene bag of 0.00125-inch thickness (± 25 percent tolerance). The bag dimensions shall be approximately 12-1/2 by 5-3/4 inches. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The unsealed opening shall be at the smaller dimension of the bag. The bag may be fabricated from polyethylene tubing or sheeting.

5.1.1.2 Intermediate packing. Ten pairs of gloves of one size only, unit packed as specified in 5.1.1.1, shall be positioned flat in an intermediate paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676 or variety 1, style VIII, type G, class 1 of PPP-B-566. Inside dimensions of each box shall approximate 12-1/2 inches in length, 5-3/4 inches in width, and 3-3/4 inches in depth. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied along the center of the length opening and extending along the bottom and up the sides, approximately 2 inches.

5.1.2 Commercial. Gloves shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. One hundred and sixty pairs of gloves of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate boxes shall be packed flat four in length, one in width, and four in depth within a shipping container, with the length of the intermediate box parallel to the ends of the shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 13 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced in accordance with the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of unit load specified (see 6.2).

5.2.2 Level B packing. One hundred and sixty pairs of gloves of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. Level A intermediate boxes shall be packed flat four in length, one in width, and four in depth within a shipping container, with the length of the intermediate box parallel to the ends of the shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 13 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2.

5.2.3 Commercial packing. Gloves, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), gloves, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs and shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The gloves are intended for use by Military police and ceremonial activities personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Subject term (key word) listing.

Ceremonial activities
Cotton
Handwear
Knitted
Simplex

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU
Air Force - 11

Review activities:

Army - MD
Navy - MC
Air Force - 82, 99
DLA - CT

Preparing activity:

Army - GL

(Project 8440-0190)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.

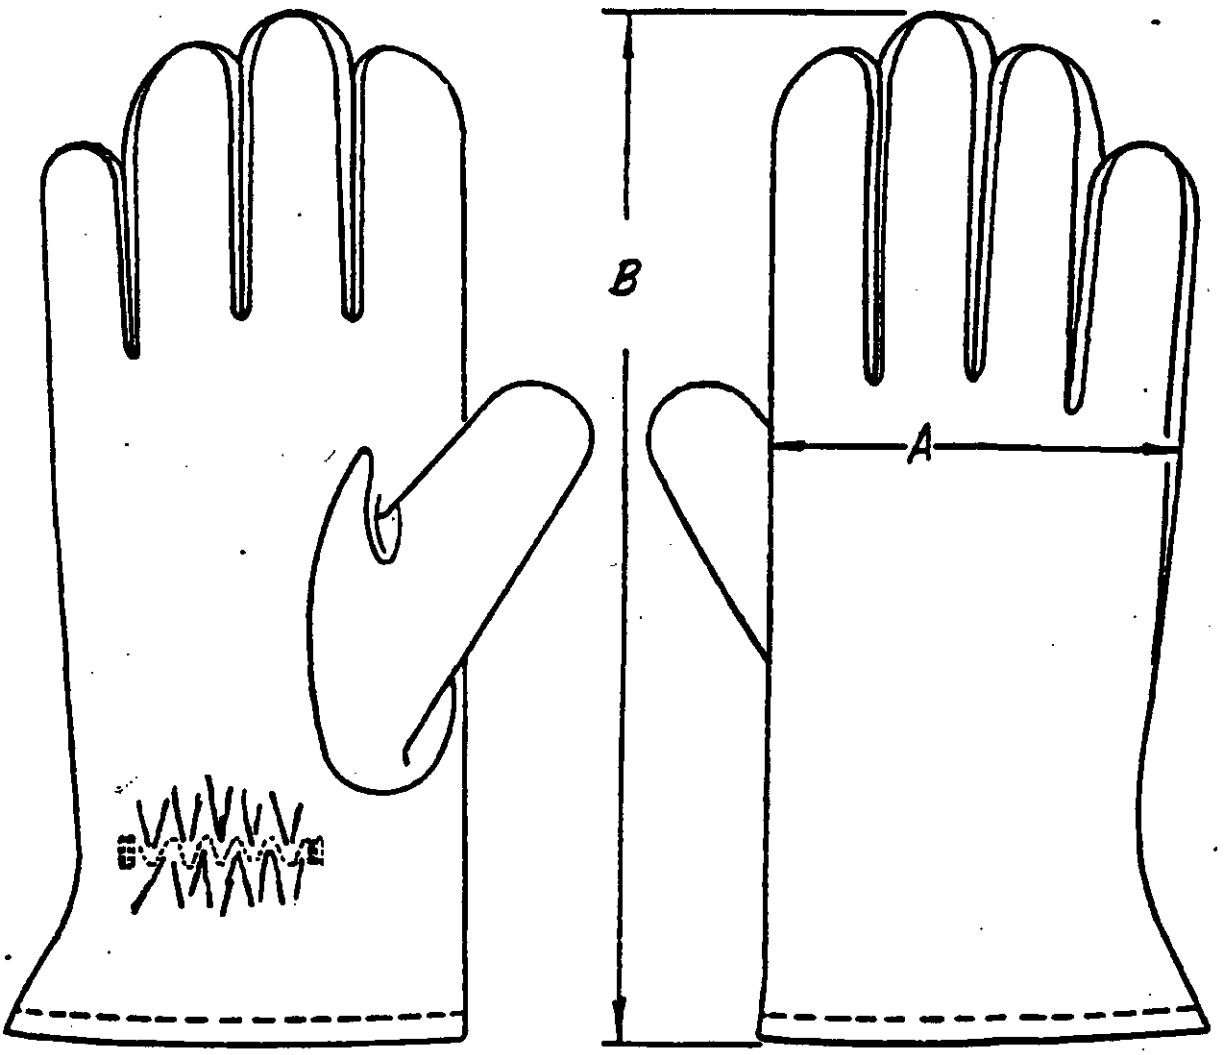


FIGURE 1. GLOVES, MEN'S, CLOTH, DRESS, WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:43Z
Check the source to verify that this is the current version before use.