MILITARY SPECIFICATION SHEET

BATTERY, STORAGE, LEAD-ACID, BB-640/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of the specification MIL-B-83769.

Military part number	-M83769/3-1
Nominal voltage	-24 volts
Maximum weight	-34 pounds (wet)
Capacity at 1-hour rate	-8.4 AH
Discharge rate for cell terminal post, intercell connectors, terminal connectors	-95 amps
Dimensions and configurations	-see Figures 1 and 2
(D) Disconnect receptacle	-Figure 2 of MIL-B-83769


Notes:

1. Dimensions in inches, tolerance ±0.063 unless otherwise specified.
2. Draft angles allowed in conformance with commercial die casting practices.

International standardization. Certain provisions of this specification are the subject of International Standardization Agreements (ASCC AIR STD 12/15 and STANAG 3514AE). When revision or cancellation of this standard is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels, including department standardization offices, if required.

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:39Z
Check the source to verify that this is the current version before use.

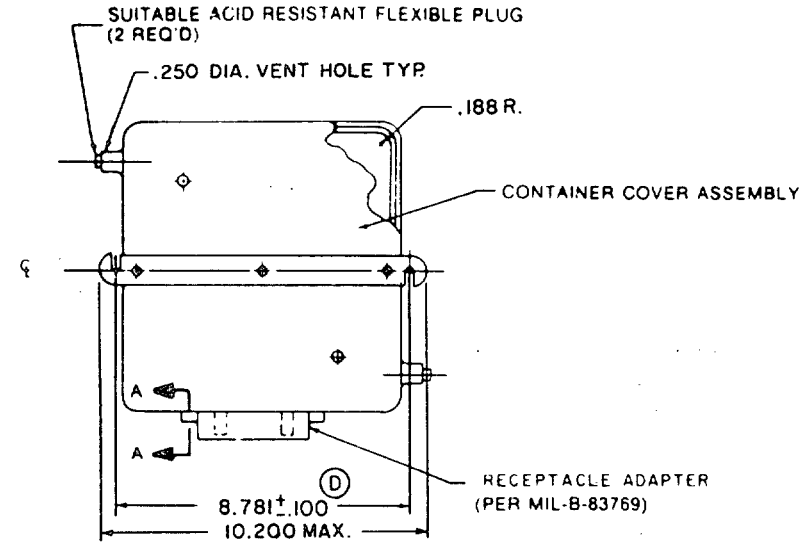

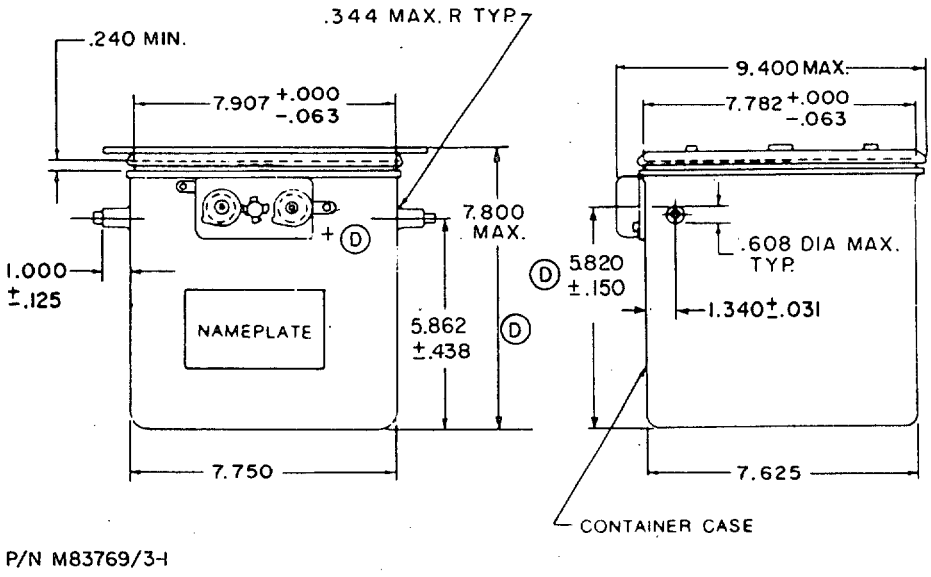


Figure 1. Battery container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:39Z
Check the source to verify that this is the current version before use.

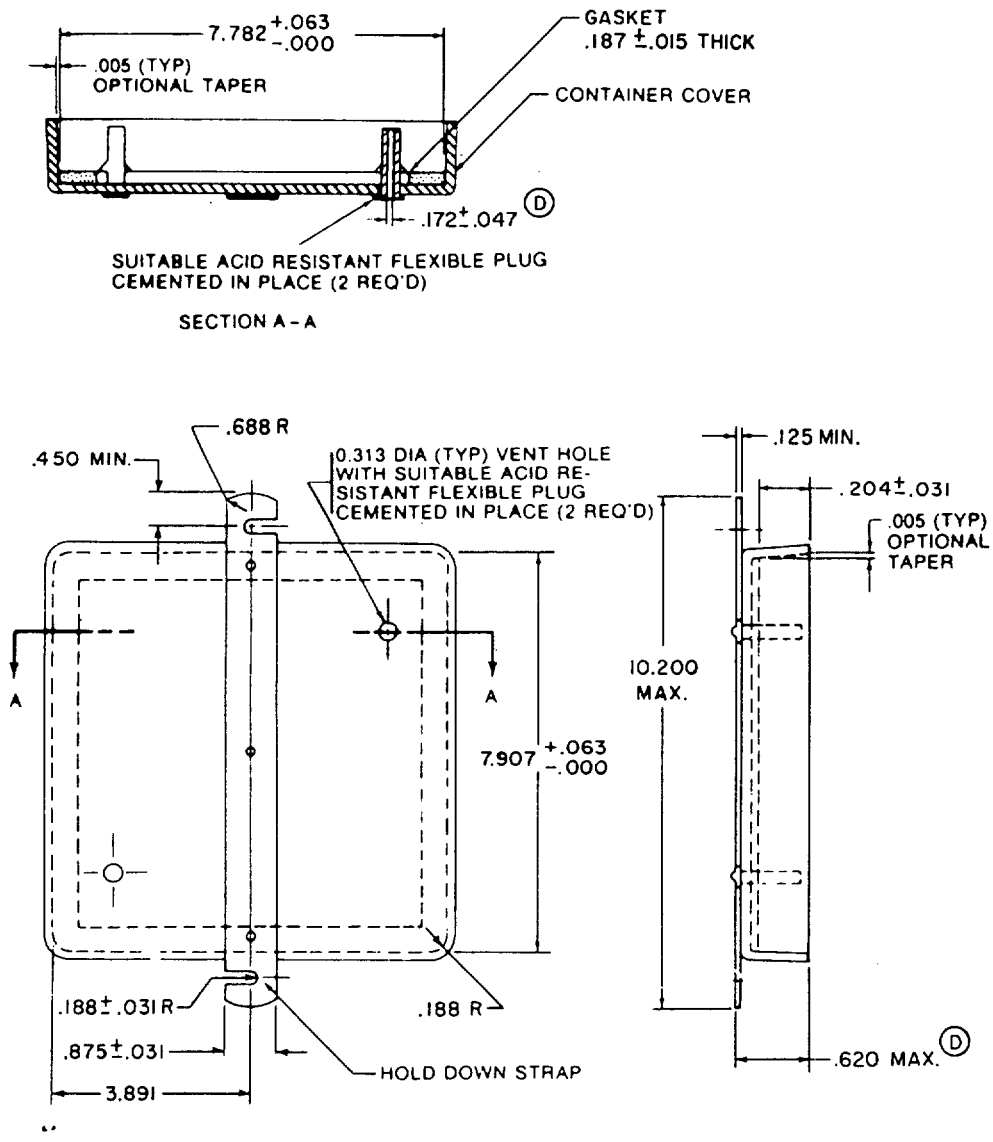


Figure 2. Container cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:39Z
Check the source to verify that this is the current version before use.

Custodians:
Air Force - 99
Army - ER
Navy - AS

Preparing activity:
Navy - AS
(Project No. 6140-0572-3)

Review activities:
Air Force - 11, 80
Army - AV
DLA - GS

NOTICE: Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DoDISS.

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 – 605-034/2167

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:39Z
Check the source to verify that this is the current version before use.