
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

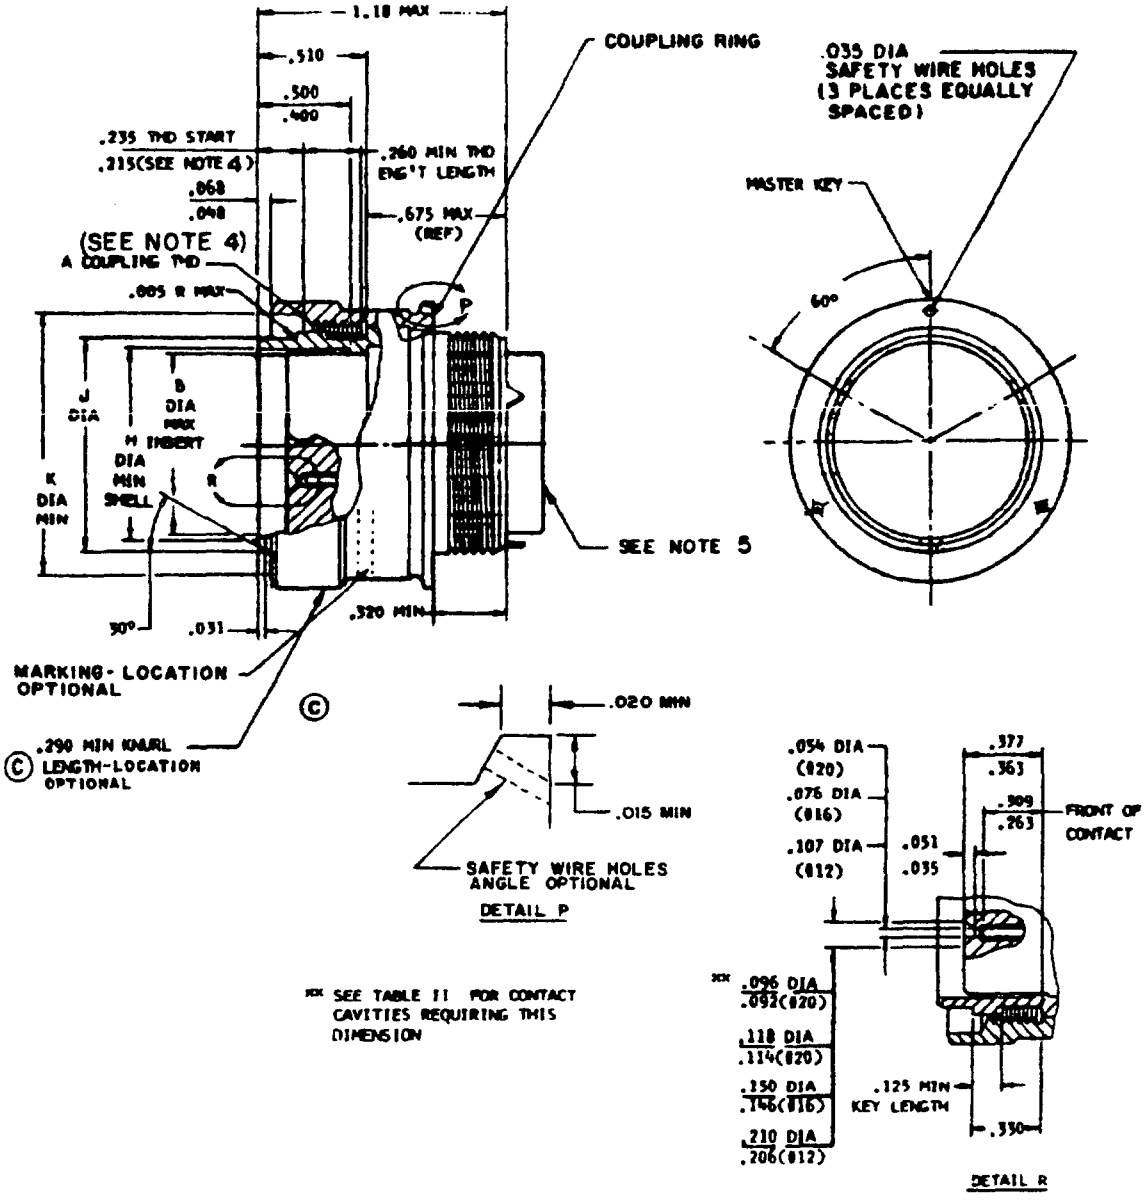

© denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.

Shell size	A Thread	B	H	J	K
8	.562-24 UNEF-2B	.290	.294	.400 .405	.575
10	.688-24 UNEF-2B	.388	.428	.526 .521	.707
12	.875-20 UNEF-2B	.558	.598	.696 .691	.895
14	.938-20 UNEF-2B	.627	.667	.765 .760	.957
16	1.062-18 UNEF-2B	.772	.794	.892 .887	1.084
18	1.188-18 UNEF-2B	.860	.900	.998 .993	1.209
20	1.312-18 UNEF-2B	.985	1.025	1.123 1.118	1.334
22	1.438-18 UNEF-2B	1.110	1.150	1.248 1.243	1.459
24	1.562-18 UNEF-2B	1.235	1.275	1.373 1.368	1.584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.260	6.60	.627	15.93	1.025	26.04
.015	.38	.263	6.68	.667	16.94	1.062	26.97
.020	.51	.290	7.37	.675	17.15	1.084	27.53
.031	.79	.294	7.47	.688	17.48	1.110	28.19
.035	.89	.309	7.85	.691	17.55	1.118	28.40
.048	1.22	.320	8.13	.696	17.68	1.123	28.52
.051	1.30	.330	8.38	.707	17.96	1.150	29.21
.054	1.37	.363	9.22	.760	19.30	1.180	29.97
.068	1.73	.377	9.58	.765	19.43	1.188	30.18
.076	1.93	.388	9.86	.772	19.61	1.209	30.71
.092	2.34	.400	10.16	.794	20.17	1.235	31.37
.096	2.44	.405	10.29	.860	21.84	1.243	31.57
.107	2.72	.410	10.41	.875	22.22	1.248	31.70
.114	2.90	.428	10.87	.887	22.53	1.275	32.38
.118	3.00	.500	12.70	.892	22.66	1.312	33.32
.125	3.18	.510	12.95	.895	22.73	1.334	33.88
.146	3.71	.521	13.23	.900	22.86	1.368	34.75
.150	3.81	.526	13.36	.938	23.83	1.373	34.87
.206	5.23	.558	14.17	.957	24.31	1.438	36.53
.210	5.33	.562	14.27	.985	25.02	1.459	37.06
.215	5.46	.575	14.61	.993	25.22	1.562	39.67
.235	5.97	.598	15.19	.998	25.35	1.584	40.23

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/83, 85, 88, 89, and 90.

For insert arrangements see MIL-STD-1554.

Part number example:

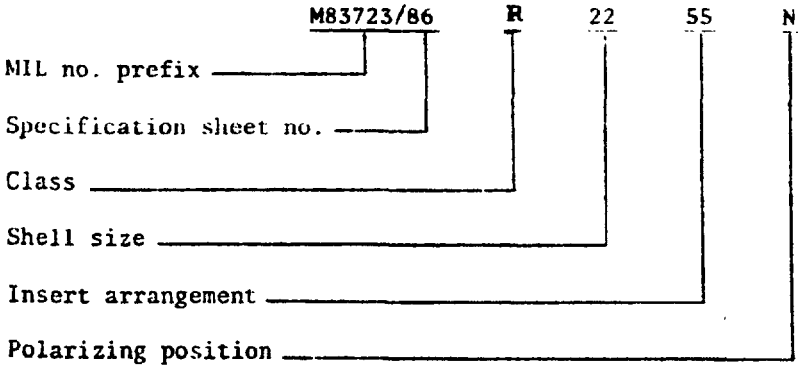

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3191-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.