MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, R.F.I. GROUNDING, Ⓐ CRIMP SOCKET CONTACTS), (SERIES III, CLASSES N AND S FIREWALL)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83723.

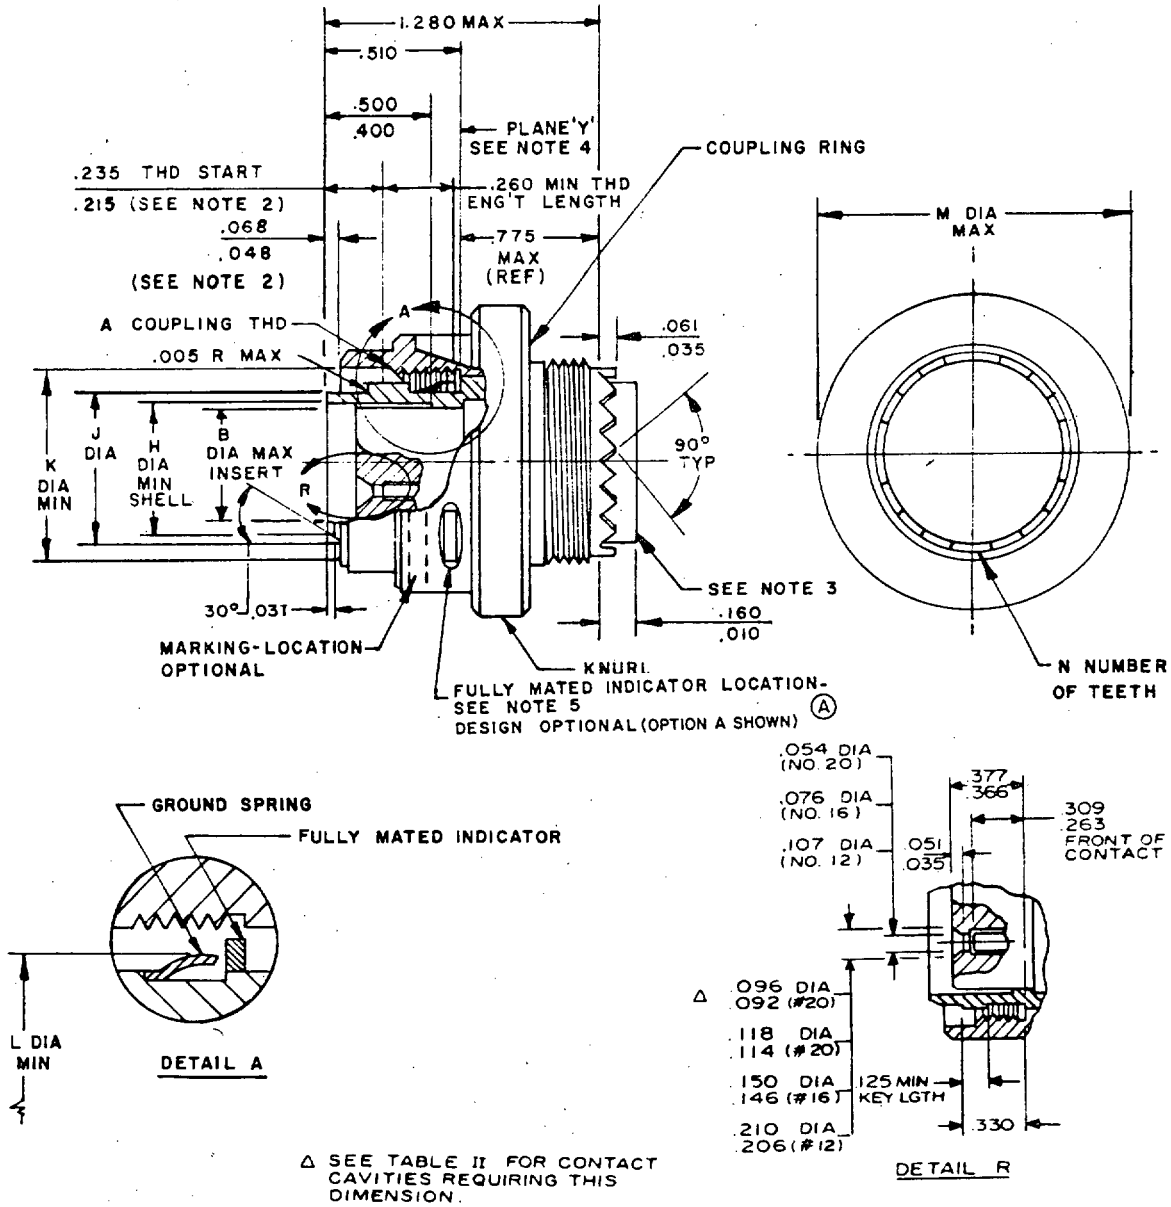


FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.

SHELL SIZE	A THREAD	B	H	J	K	L	M	N
8	.562-24 UNEF-2B	.290	.294	.400 .405	.575	.294	.967	12
10	.688-24 UNEF-2B	.388	.428	.526 .521	.707	.428	1.093	15
12	.875-20 UNEF-2B	.558	.598	.696 .691	.895	.598	1.170	21
14	.938-20 UNEF-2B	.627	.667	.765 .760	.957	.667	1.310	24
16	1.062-18 UNEF-2B	.772	.794	.892 .887	1.084	.794	1.500	30
18	1.188-18 UNEF-2B	.860	.900	.998 .993	1.209	.900	1.562	33
22	1.438-18 UNEF-2B	1.110	1.150	1.248 1.243	1.459	1.150	1.812	39


TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerance shall be ±.010 (.25 mm) for two place decimals and ±.005 (.13 mm) for three place decimals; angular tolerances are ±1°0' and ±30'.
2. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in the fully forward position.
3. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
Ⓐ 4. Shell size 8 will not mate with MIL-C-26500 connectors.
Ⓐ 5. Self-locking mechanism shall have an indicator conforming to one of the following options:

Option A

a. Dimensions using plane "Y" as a base line apply only when the indicator is at a metal to metal condition against the plug shell stop shoulder.
b. The fully mated condition is when any portion of serrated indicator is visible through window.
c. The self-locking mechanism shall be designed to click only when near full engagement.



Option B

a. Plane "Y" and location of fully mated indicator in Detail A does not apply.
b. The coupling ring shall have two fully mating indicators, 180° apart. Each indicator shall consist of a moving "flag" and a fixed orange reference stripe.
c. The fully mated condition is when the flags are coincident with or past the orange stripe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


This connector mates with MIL-C-83723/83, 85, 88, 89, and 90.

For insert arrangements see MIL-STD-1554.

RFI spring strip shall have a minimum of six fingers per inch and shall point to the rear of connector.

Visual indicator required to indicate locked position.

Part number example:

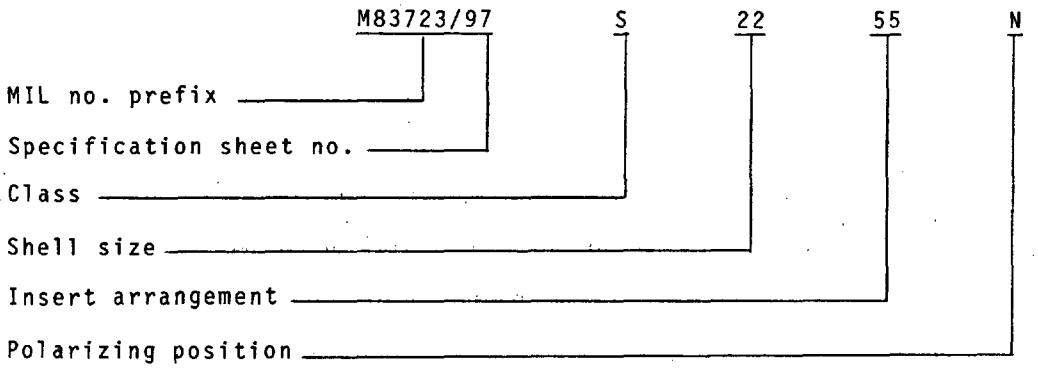

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3307-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/1971

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.