
MILITARY SPECIFICATION SHEET

SOCKETS, PLUG-IN ELECTRONIC COMPONENTS, SINGLE-IN-LINE, LOW PROFILE (FOR SINGLE-IN-LINE PACKAGES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the sockets described herein shall consist of this Specification and the latest issue of MIL-S-83734.

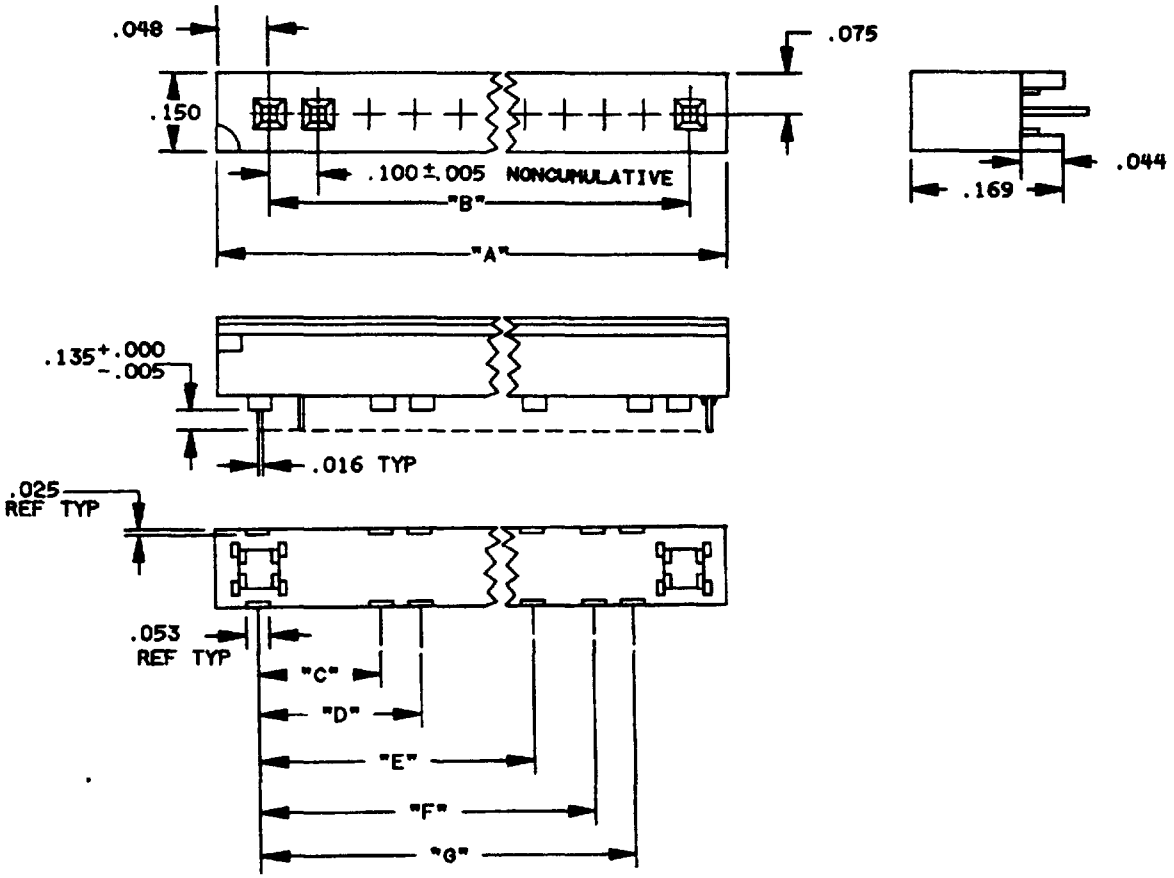


INCHES	MM	INCHES	MM	INCHES	MM
.005	0.13	.150	3.81	.999	25.37
.012	0.30	.169	4.29	1.100	27.94
.016	0.41	.300	7.62	1.199	30.45
.025	0.64	.399	10.14	1.200	30.48
.044	1.12	.600	15.24	1.299	33.00
.045	1.14	.699	17.75	1.900	48.26
.048	1.22	.700	17.78	2.100	53.34
.053	1.35	.799	20.29	2.199	55.86
.075	1.91	.800	20.32	2.300	58.42
.100	2.54	.899	22.83	2.399	60.93
.135	3.43	.900	22.86	2.400	60.97
				2.499	63.47

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, the tolerance for three place decimals is ±.005 (0.13 mm) and for two place decimals is ±.01 (0.3 mm).

FIGURE 1. Socket, single-in-line, without rails.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

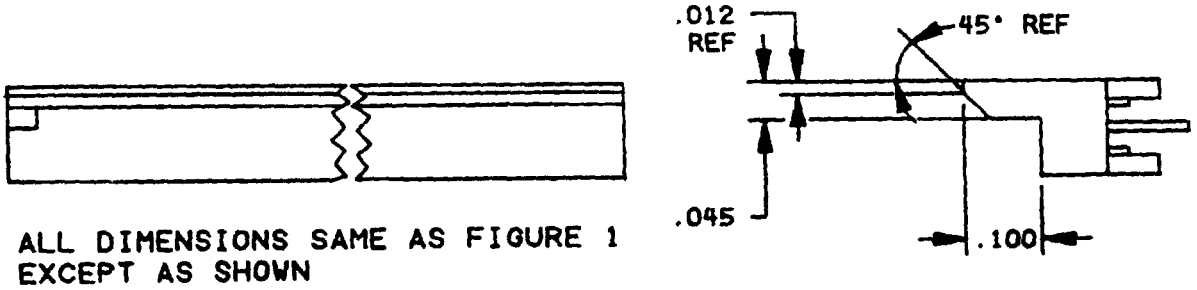

ALL DIMENSIONS SAME AS FIGURE 1
EXCEPT AS SHOWN

INCHES	MM
.012	0.30
.045	1.14
.100	2.54

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, the tolerance for three place decimals is ±.005 (0.13 mm) and for two place decimals is ±.01 (0.3 mm).

FIGURE 2. Socket, single-in-line, with rails.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1, 2, and table I.

Material:

Insulator: In accordance with MIL-S-83734.

Contact: Beryllium copper per QQ-C-530.

Contact plating: In accordance with MIL-S-83734.

Termination: Printed circuit type II.

Contact identification: Not applicable.

Mechanical:

Test gage mating force: Test gage mating force shall be 3/4 lbf maximum.

Contact retention: 1 pound (axial load) minimum.

Solder wicking: In accordance with MIL-STD-1344, test method 2019.

Test sequence shall be solder wicking, visual, mechanical and insertion force (two samples required).

Mating leads: Devices shall accept flat leads .008 (.20 mm) to .015 (.38 mm) thick by .015 (.38 mm) to .021 (.53 mm) wide. The value for mating force is based upon the use of standard leads .011 ±.002 (.28 ±.05 mm) thick by .018 ±.002 (.46 ±.05 mm) wide. The length of lead accepted by the device shall be .150 (3.81 mm) long for the low profile sockets. Contact shall be made at or before reaching a depth of .100 (2.54 mm).

Socket standoffs: Socket is provided with standoffs for ease of dip soldering without excessive solder disposition.

Contact: Contact is closed construction to preclude solder or flux wicking problems.

Series designator: Series 1 (low profile).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

Part number. M83734/16 - (dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash no.	Number of contacts	Terminal finish 1/	Dimensions							Figure
			A (Max.)	B	C (Ref)	D (Ref)	E (Ref)	F (Ref)	G (Ref)	
001	4	Gold	.399	.300	.300	---	---	---	---	1
002	4	Tin/lead	"	"	"	---	---	---	---	1
003	4	Gold	"	"	"	---	---	---	---	2
004	4	Tin/lead	"	"	"	---	---	---	---	2
005	7	Gold	.699	.600	"	.600	---	---	---	1
006	7	Tin/lead	"	"	"	"	---	---	---	1
007	7	Gold	"	"	"	"	---	---	---	2
008	7	Tin/lead	"	"	"	"	---	---	---	2
009	8	Gold	.799	.700	"	"	---	---	---	1
010	8	Tin/lead	"	"	"	"	---	---	---	1
011	8	Gold	"	"	"	"	---	---	---	2
012	8	Tin/lead	"	"	"	"	---	---	---	2
013	9	Gold	.899	.800	"	"	---	---	---	1
014	9	Tin/lead	"	"	"	"	---	---	---	1
015	9	Gold	"	"	"	"	---	---	---	2
016	9	Tin/lead	"	"	"	"	---	---	---	2
017	10	Gold	.999	.900	"	"	---	---	---	1
018	10	Tin/lead	"	"	"	"	---	---	---	1
019	10	Gold	"	"	"	"	---	---	---	2
020	10	Tin/lead	"	"	"	"	---	---	---	2
021	12	Gold	1.199	1.100	"	"	1.100	---	---	1
022	12	Tin/lead	"	"	"	"	"	---	---	1
023	12	Gold	"	"	"	"	"	---	---	2
024	12	Tin/lead	"	"	"	"	"	---	---	2
025	13	Gold	1.299	1.200	"	"	"	---	---	1
026	13	Tin/lead	"	"	"	"	"	---	---	1
027	13	Gold	"	"	"	"	"	---	---	2
028	3	Tin/lead	"	"	"	"	"	---	---	2
029	20	Gold	1.999	1.900	"	"	"	.1.900	---	1
030	20	Tin/lead	"	"	"	"	"	"	---	1
031	20	Gold	"	"	"	"	"	"	---	2
032	20	Tin/lead	"	"	"	"	"	"	---	2
033	22	Gold	2.199	2.100	"	"	"	"	---	1
034	22	Tin/lead	"	"	"	"	"	"	---	1
035	22	Gold	"	"	"	"	"	"	---	2
036	22	Tin/lead	"	"	"	"	"	"	---	2
037	24	Gold	2.399	2.300	"	"	"	"	2.300	1
038	24	Tin/lead	"	"	"	"	"	"	"	1
039	24	Gold	"	"	"	"	"	"	"	2
040	24	Tin/lead	"	"	"	"	"	"	"	2
041	25	Gold	2.499	2.400	"	"	"	"	"	1
042	25	Tin/lead	"	"	"	"	"	"	"	1
043	25	Gold	"	"	"	"	"	"	"	2
044	25	Tin/lead	"	"	"	"	"	"	"	2

1/ Contact engagement area finish - Gold for all dash numbers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS, SH, TD
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3425-01)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—605-030/20030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.