MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED INDICATOR LIGHT FOR, MODULAR, 4-LAMP

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the indicator lights described herein shall consist of this document and the latest issue of Military Specification MIL-S-22885


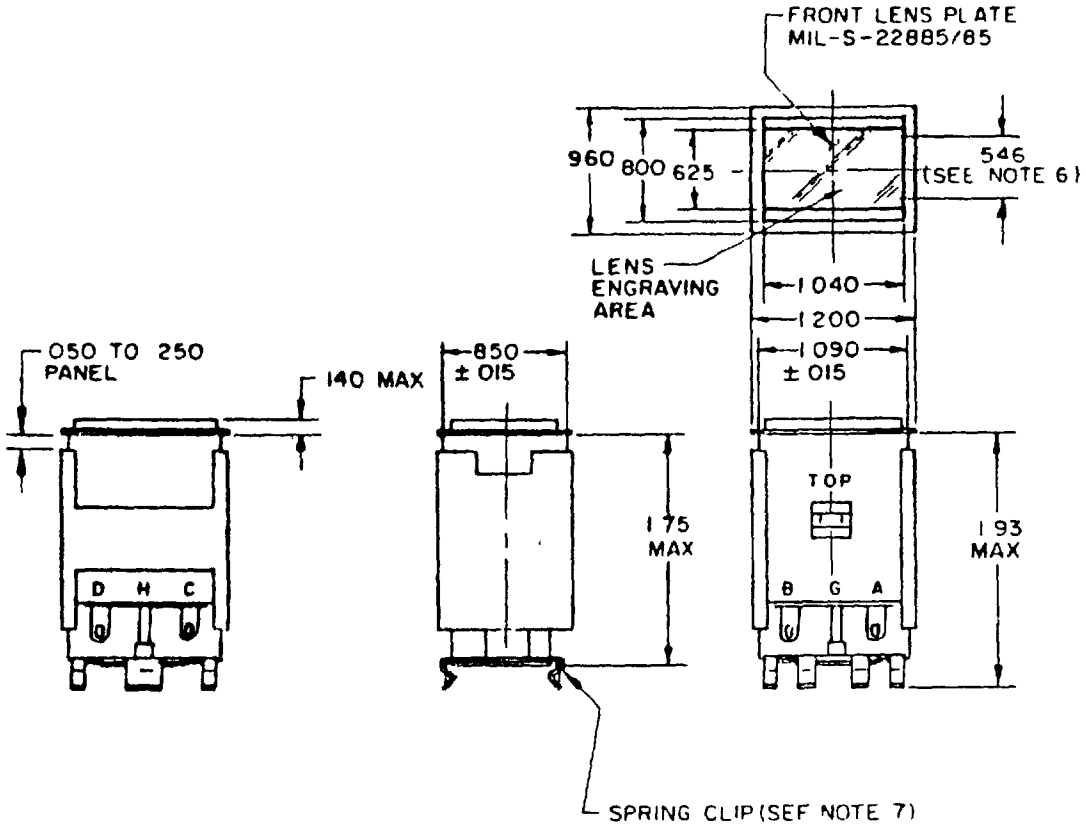


FIGURE 1 Indicator light, modular, 4-lamp


(G) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

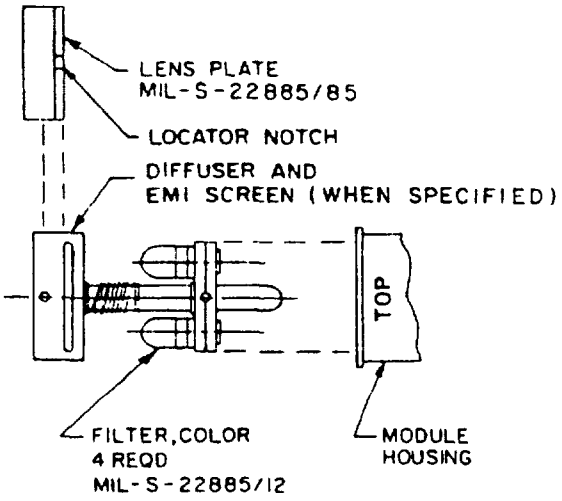

LAMP MODULE

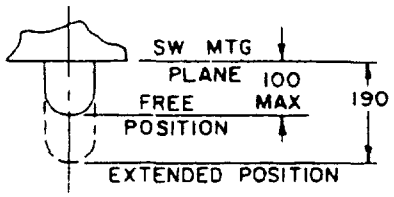

PLUNGER DETAIL

INCHES	MM	INCHES	MM
.015	.38	.800	20.32
.050	1.27	.850	21.59
.078	1.98	.960	24.38
.100	2.54	1.040	26.42
.190	4.83	1.090	27.69
.250	6.35	1.200	30.48
.546	13.87	1.75	44.4
.625	15.88	1.93	49.0

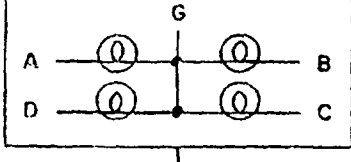

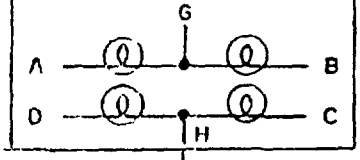
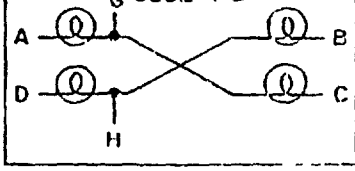

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3. Unless otherwise specified, tolerance is ± .016 (.41 mm)
4. Terminals shall be permanently identified with letters as shown in table I
5. Circuit schematic shall be marked on the module housing as shown in table I
6. Engraving area recommended for uniform lighting
7. Ⓖ Switch clip design optional-must interface with MIL-S-22885/11 switch modules.
8. Terminal and plunger stop design is optional
9. The design configuration is optional within envelope dimensions shown

FIGURE 1 Indicator light, modular, 4-lamp - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

TABLE I. Lens style, lamp circuit and lamp terminal identification. 1/ 3/

LENS STYLE (DIFFUSER CONFIGURATION)		
CODE A SOLID	CODE B SPLIT VERTICALLY	CODE C SPLIT HORIZONTALLY
CODE D 3-WAY SPLIT	CODE E 3-WAY SPLIT	CODE F 4-WAY SPLIT

LAMP CIRCUIT AND LAMP TERMINAL IDENTIFICATION		
CODE 1	CODE 2	CODE 3
		
CODE 4 2/	CODE 5	
		


(G)

1/ For reliability, it is recommended that selection of lens styles and lamp circuits be limited to those providing at least 2 lamps per display area.

2/ Inactive for new design

3/ Lamp location and lens styles shown are as viewed from front panel with module position in accordance with figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

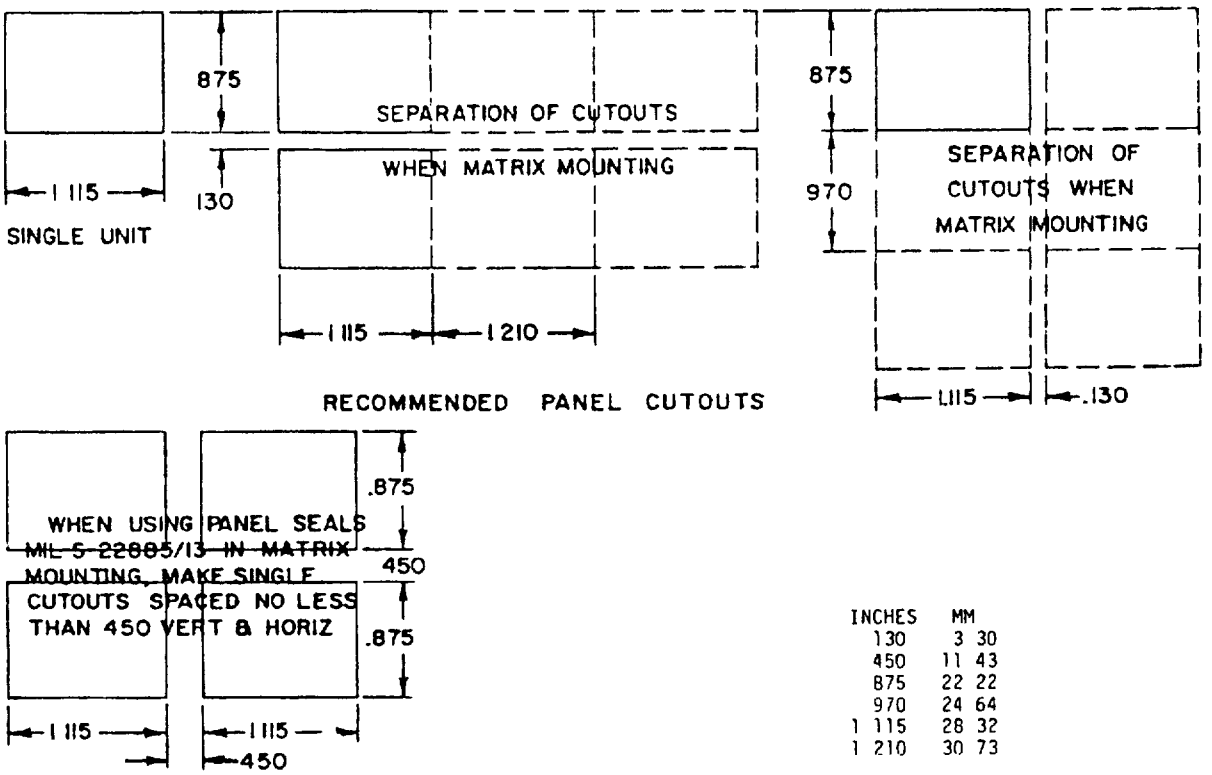

INCHES	MM
.130	3.30
.450	11.43
.875	22.22
.970	24.64
1.115	28.32
1.210	30.73

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3. Unless otherwise specified, tolerance is ± .010 (.25 mm)

FIGURE 2 Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

PEQUIREMENTS

Dimensions and configuration See figures 1 and 2

Complete indicator light shall consist of

1 - Lamp module
1 - Lens plate (MIL-S-22885/85), when specified (see table III)
4 - Lamps (T-1-3/4 midget-flange base) not included, order separately
4 - Color filters (MIL-S-22885/12), when specified (see table III)
1 - Module housing
1 - Plunger stop
1 - Panel seal (MIL-S-22885/13) not included, order separately
1 - EMI screen, when specified (see table III)

Enclosure design 2 (dripproof), when MIL-S-22885/13 panel seal is utilized, otherwise 1 (unsealed) when used without panel seal

Vibration grade 2 (10 to 500 Hz)

EMI shielding When specified (see table III), indicators shall be equipped with a fine mesh EMI screen installed between the lamps and diffuser, making electrical contact to the indicator light's housing The screen to housing resistance shall not exceed 1 ohm through one complete cycle of operation with full overtravel Test in accordance with the following

a Test current - 100 ±10 milliamperes
b Open circuit test voltage 6 ±1 Vdc
c Before and after electrical endurance in qualification and group C testing

Color and luminance values In accordance with MIL-S-22885/12 (brightness is reduced by approximately 50 percent when EMI screen is installed)

Lens transmittance T (translucent)

Lamp module The lamp insulator block (base) may be fabricated from thermoplastic material

Lens Shall be of translucent white color in the unlighted condition In the lighted condition it shall appear in a color determined by the color of the lamp filters (MIL-S-22885/12) The lens style shall be as shown in table I

Lens plate material High temperature heat resistant thermoplastic When thermal shock test is performed in accordance with MIL-S-22885, the maximum temperature (nonoperating) shall be 71°C

Color filters Shall be in accordance with MIL-S-22885/12

Adjustable mounting bracket Shall accommodate panels from .05 to .250 inch in thickness

Mounting flange Front face of the mounting flange shall be corrosion resistant steel with a natural lusterless finish

Plunger stop Shall be readily adjustable or removable in the field without the need of special tools Plunger stop shall be removed when switching action is required when indicator light is coupled to a switch assembly

Plunger stop test With the plunger stop functionally installed in the lamp module, and the lamp module mounted by its normal mounting means, a static force of 25 pounds shall be applied to the legend plate for 1 minute

Shock Method I

Weight 2.1 ounces maximum (includes color filters and panel seal)

Part number M22885/10 - (dash number from table III)

(G) Marking Color filter symbols shall not appear in the part number marked on the items, but may be marked on shipping containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

Qualification inspection Qualification inspection required in accordance with MIL-S-22885/9, using switch assemblies in accordance with MIL-S-22885/11

Group A inspection Shall be in accordance with table II

TABLE II Group A inspection

Inspection	Requirement and inspection reference
Examination	MIL-S-22885
Lamp circuit	MIL-S-22885
Dielectric withstanding voltage	MIL-S-22885

Intended use Lighted indicator or switch actuator Will accommodate the following
Switch assembly (MIL-S-22885/11).
Color filters (MIL-S-22885/12)
Panel seal (MIL-S-22885/13)
Lamps - Midget-flange-base T-1-3/4

TABLE III Dash numbers

Dash numbers 1/						Lens style	Lamp circuit schematic code
Without EMI screen			With EMI screen				
Narrow front lens plate 2/ M22885/85-01	Extended front lens plate M22885/85-02	Front lens plate not included	Narrow face lens plate M22885/85-01	Extended face lens plate M22885/85-02	Front lens plate not included		
01	09	16	47	61	75	A	1
02 3/	--	--	--	--	--	A	4
03	10	17	48	62	76	B	1
04	11	18	49	63	77	B	2
05	12	19	50	64	78	C	1
06	13	20	51	65	79	C	3
07	14	21	52	66	80	A	3
08 3/	15 3/	22 3/	--	--	--	A	2
23	31	39	53	67	81	D	1
24	32	40	54	68	82	D	3
25	33	41	55	69	83	D	5
26	34	42	56	70	84	E	1
27	35	43	57	71	85	E	3
28	36	44	58	72	86	E	5
29	37	45	59	73	87	F	1
30	38	46	60	74	88	F	5

1/ Part numbers shown are for units without color filters When color filters are required, add the color symbols of MIL-S-22885 with the location sequence as shown in the following example and figure 3

Example M22885/10 - 49 R G G R


Red (position 1)
Green (position 2)
Green (position 3)
Red (position 4)

For direct government stocking, do not use color symbols, color filters should be procured separately.

2/ Dash numbers are interchangeable with and replace former dash numbers which contained an additional zero

3/ Inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

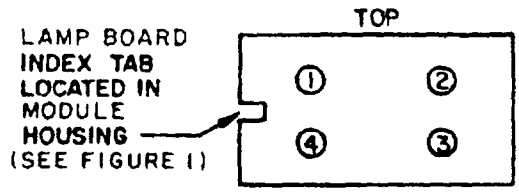

NOTE Numbers shown indicate sequence of color symbols in part number

FIGURE 3 Color filter location with respect to modular indicator light (housing).

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AV, MI
Navy - AS
Air Force - 17, 99
DLA - ES

User activities
Army - AR
Navy - MC, SH, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1125-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-S-22885/106

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:15Z
Check the source to verify that this is the current version before use.