INCH-POUND
MIL-PRF-22885/13L
7 October 2019
SUPERSEDING
MIL-PRF-22885/13K
26 April 2004


PERFORMANCE SPECIFICATION SHEET

SWITCH, SUBASSEMBLY,BOOT, DRIPPROOF PANEL SEAL

(FOR ILLUMINATED PUSH BUTTON SWITCH)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification sheet and MIL-PRF-22885.

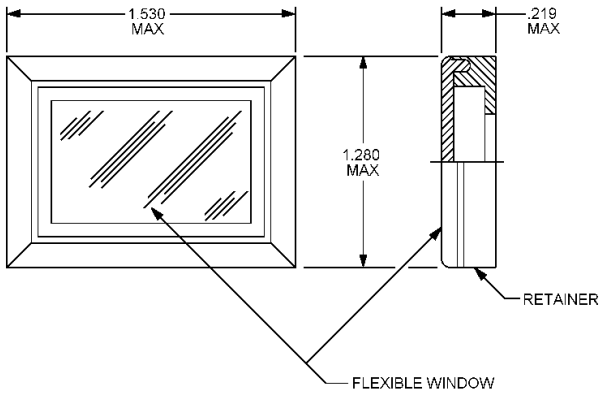

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.

FIGURE 1. Boot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Classification: See MIL-PRF-22885/9.

Weight: .15 ounce maximum.

Seal: Dripproof (enclosure design 2).

Sunshine test: With the boot properly assembled to the 4-lamp modular indicator light (or to the 4-lamp illuminated push switch) the boot shall be subjected to the solar radiation (sunshine test), MIL-STD-810, method 505, procedure I, using the basic hot diurnal cycle. At the completion of the test the boot shall be compared to untested boots. There shall be no more than 10 percent change in window transmittance after the completion of the test; nor shall there be any crazing or cracking.

Mechanical endurance: 5,000 cycles at -55°C; 10,000 cycles at +71°C ±2°C; 35,000 cycles at +25°C ±2°C. All four lamps shall be continuously energized at their maximum rated voltage during cycling at the +71°C ±2°C and +25°C ±2°C conditions. MIL-DTL-6363/8-5 lamps (or industry equivalent) shall be used. Following this test, the legends shall be legible and there shall be no cracking or crazing of the boot.

Marking: Identification marking shall be on unit package or tag.

Part or Identifying Number (PIN): M22885/13-02. PIN M22885/13-01 (with polyvinyl chloride window and stainless steel mounting adapter) has been canceled and replaced by M22885/13-02.

Group A inspection: Shall be in accordance with table I. The sampling plan shall be in accordance with MIL-PRF-22885.

Qualification and group B inspection: Required as part of the 4-lamp illuminated push button switch MIL-PRF-22885/9). Qualification and group B inspections shall consist of the inspections specified in table II.

Intended use: As dripproof panel seal boot for 4-lamp illuminated push switch, MIL-PRF-22885/9 or for 4-lamp modular indicator light, MIL-PRF-22885/10.

TABLE I. Group A inspection.

Subgroup 1
Visual and mechanical examination 1/
Subgroup 2
Seal 2/
Luminance 3/

1/ Only one sample boot per lot needs to be inspected for compliance to physical dimensions.

2/ The boots shall be examined for pinholes and other surface defects using a lighted 3 diopter inspection equipment.

3/ The luminance inspection requirement may be satisfied with a visual comparison of the transparency of production boots to a conforming standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:16Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification and group B inspection.

Boot assembled to switch assembly specified below 1/	Group	Tests to be performed
M22885/9-02 (4 sample units)	I	Visual and mechanical examination 2/ Luminance Sunshine Seal
M22885/9-02 (2 sample units from group I)	II	Mechanical endurance Seal Visual and mechanical examination
M22885/9-02 (2 sample units from group I)	III	Shock Vibration Visual and mechanical examination

1/ Switch samples subjected to the mechanical endurance test shall have reverse engraved legend. The legend characters shall be .120 inch high with .020 inch stroke, black filled, and utilizing at least three-fourths of the maximum legend area.
2/ 25 cycles of removal and reinstallation of the boot shall be made during visual examination.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Reference Documents
MIL-PRF-22885
MIL-PRF-22885/9
MIL-PRF-22885/10
MIL-DTL-6363/8
MIL-STD-810

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2019-047)

Review activities:
Army - AT, AV, CR4, MI
Navy - AS, MC, OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:16Z
Check the source to verify that this is the current version before use.