NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND
MIL-PRF-22885/15D
25 April 1975
SUPERSEDING
MIL-S-22885/15C
31 August 1970


PERFORMANCE SPECIFICATION SHEET

SWITCHES, PUSH, ILLUMINATED, 4 - LAMP, CLIP MOUNTED

(MODULAR CONSTRUCTED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-22885.

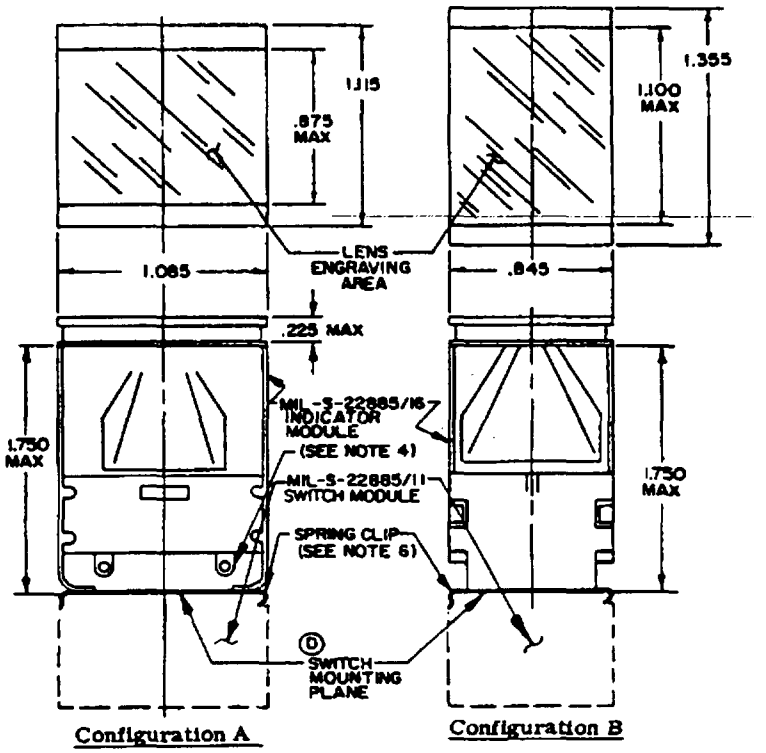

Inches	mm
.225	5.72
.845	21.46
.875	22.23
1.085	27.56
1.100	27.94
1.115	28.32
1.355	34.42
1.750	44.45


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 (.41 mm) and ±.02 (.51 mm).
3. The design configuration is optional within envelope dimensions shown.
4. Terminal design is optional.
5. Metric equivalents (to the nearest ,01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
6. (D) Switch clip design optional - must interface with MIL-S-22885/11 switch modules.

FIGURE 1. Switch, push, illuminated, 4-lamp clip mounted (modular constructed) .


(D) denotes change

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

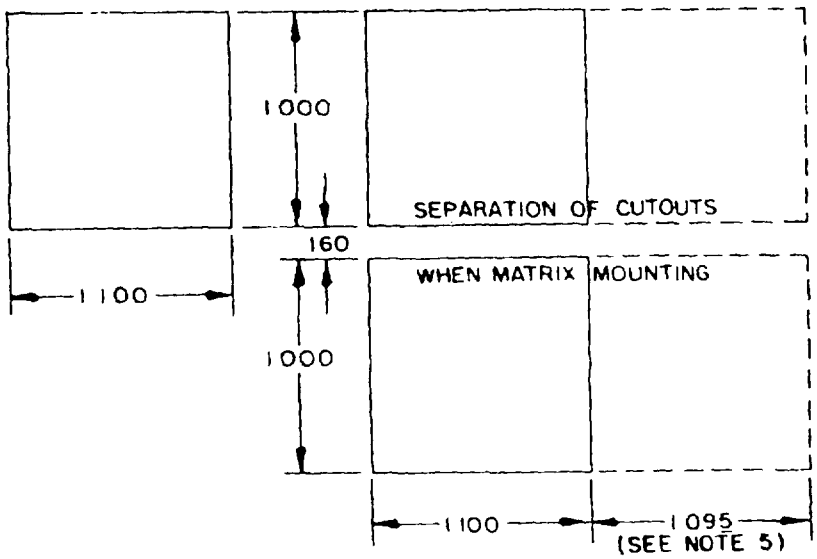

Configuration A mounting

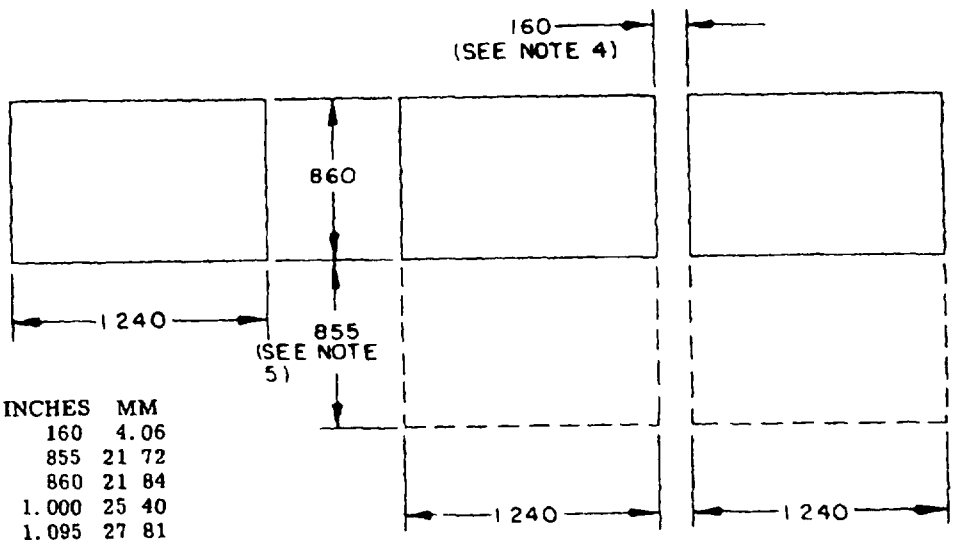

INCHES	MM
.160	4.06
.855	21.72
.860	21.84
1.000	25.40
1.095	27.81
1.100	27.94
1.240	31.50

Configuration B mounting

NOTES
1. Dimensions are in inches.
2. Tolerance is ± .010 (.25 mm), -.000 (.00 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. This is the separation of cutout when matrix mounting.
5. Add for each additional unit.

FIGURE 2. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

(D) Dimensions and configuration See figure 1 and table II

Complete switch shall consist of
1 - Modular indicator light (MIL-S-22885/16)
1 - Switch assembly (MIL-S-22885/11)
4 - Color filters (MIL-S-22885/12), when specified See table II
4 - Lamps (T-1-3/4 midget-flange-base, incandescent type) - Not included, order separately.

(D) Weight 235 pound maximum

(D) Enclosure design 1 (unsealed)

(D) Vibration grade 2 (10 to 500 Hz)

Shock (specified pulse) Method 213 of MIL-STD-202, test condition A (50g)

(D) Thermal shock Maximum temperature shall be +71°C (+55°C with lamps energized) Minimum temperature shall be -55°C

(D) Part number M22885/15- (dash number from table II).

Qualification inspection All applicants for qualification approval shall demonstrate that each of their items conform to all the requirements specified in the applicable documents, singularly and in combination with all other previously qualified items, regardless of manufacturer

(a) When the basic sensitive switches are qualified to MIL-S-8805, switches shall be tested in accordance with table I
(b) When the basic sensitive switches are not qualified to MIL-S-8805, the switch type for which qualification is sought, shall be submitted to the complete tests in accordance with table X of MIL-S-22885 The sample switches submitted to the color and luminance test, group VIII shall also be subjected to the color fade test in MIL-S-22885/12

(D) Group A inspection Tests may be performed on individual MIL-S-22885/11 and MIL-S-22885/16 units prior to assembly as a MIL-S-22885/15 unit, when applicable Contact resistance may be performed on individual MIL-S-8805/2 basic switches prior to assembly as MIL-S-22885/11 unit

(D) TABLE I Qualification and group C inspection (group submission)

Part numbers M22885/15	Qualification inspection table X of MIL-S-22885		Additional testing 1/	Extent of approval
	Group	Number of sample units		
-02	I II III	4 2 (from group I) 2 (from group I)	Plunger stop test 2/	MIL-S-22885/15, /16, /11 /12
-36	I VI 3/	4 4 (from group I)		
-20	I II	2 2 (from group I)		

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

(D) TABLE I Qualification and group C inspection (group submission) - Continued

Part numbers M22885/15	Qualification inspection table X of MIL-S-22885		Additional testing 1/	Extent of approval
	Group	Number of sample units		
4/	VIII	10	Color fade test of MIL-S-22885/12	

1/ In addition to those tests specified, switch modules M22885/11-01 and -03 shall be subjected to visual and mechanical examination and operating characteristics testing utilizing MIL-S-22885/16 indicator modules (2 samples each)
2/ The plunger stop test of MIL-S-22885/16 shall be performed by removing the switch assembly and installing the stop
3/ Sea level resistive loads only
4/ Two sample units for each color (4 lamps per sample unit) Samples from groups II thru VII may be used

(D) TABLE II Dash number, design, and operating characteristics

Dash number 1/ 2/	Indicator M22885/16- module	Switch module M22885/11-
01(XXXX)	01(XXXX)	01
02(XXXX)	01(XXXX)	02
03(XXXX)	01(XXXX)	03
04(XXXX)	01(XXXX)	04
05(XXXX)	05(XXXX)	01
06(XXXX)	05(XXXX)	02
07(XXXX)	05(XXXX)	03
08(XXXX)	05(XXXX)	04
09(XXXX)	07(XXXX)	01
10(XXXX)	07(XXXX)	02
11(XXXX)	07(XXXX)	03
12(XXXX)	07(XXXX)	04
13(XXXX)	09(XXXX)	01
14(XXXX)	09(XXXX)	02
15(XXXX)	09(XXXX)	03
16(XXXX)	09(XXXX)	04
17(XXXX)	11(XXXX)	01
18(XXXX)	11(XXXX)	02
19(XXXX)	11(XXXX)	03
20(XXXX)	11(XXXX)	04
21(XXXX)	13(XXXX)	01
22(XXXX)	13(XXXX)	02
23(XXXX)	13(XXXX)	03
24(XXXX)	13(XXXX)	04
25(XXXX)	02(XXXX)	01
26(XXXX)	02(XXXX)	02
27(XXXX)	02(XXXX)	03
28(XXXX)	02(XXXX)	04

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Ⓓ TABLE II Dash number, design, and operating characteristics - Continued

Dash number 1/ 2/	Indicator M22885/16- module	Switch module M22885/11-
29(XXXX)	06(XXXX)	01
30(XXXX)	06(XXXX)	02
31(XXXX)	06(XXXX)	03
32(XXXX)	06(XXXX)	04
33(XXXX)	08(XXXX)	01
34(XXXX)	08(XXXX)	02
35(XXXX)	08(XXXX)	03
36(XXXX)	08(XXXX)	04
37(XXXX)	10(XXXX)	01
38(XXXX)	10(XXXX)	02
39(XXXX)	10(XXXX)	03
40(XXXX)	10(XXXX)	04
41(XXXX)	12(XXXX)	01
42(XXXX)	12(XXXX)	02
43(XXXX)	12(XXXX)	03
44(XXXX)	12(XXXX)	04
45(XXXX)	14(XXXX)	01
46(XXXX)	14(XXXX)	02
47(XXXX)	14(XXXX)	03
48(XXXX)	14(XXXX)	04
49(XXXX)	15(XXXX)	01
50(XXXX)	15(XXXX)	02
51(XXXX)	15(XXXX)	03
52(XXXX)	15(XXXX)	04
53(XXXX)	17(XXXX)	01
54(XXXX)	17(XXXX)	02
55(XXXX)	17(XXXX)	03
56(XXXX)	17(XXXX)	04
57(XXXX)	19(XXXX)	01
58(XXXX)	19(XXXX)	02
59(XXXX)	19(XXXX)	03
60(XXXX)	19(XXXX)	04
61(XXXX)	16(XXXX)	01
62(XXXX)	16(XXXX)	02
63(XXXX)	16(XXXX)	03
64(XXXX)	16(XXXX)	04
65(XXXX)	18(XXXX)	01
66(XXXX)	18(XXXX)	02
67(XXXX)	18(XXXX)	03
68(XXXX)	18(XXXX)	04

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

Ⓓ TABLE II Dash number, design, and operating characteristics - Continued

Dash number 1/ 2/	Indicator M22885/16- module	Switch module M22885/11-
69(XXXX)	20(XXXX)	01
70(XXXX)	20(XXXX)	02
71(XXXX)	20(XXXX)	03
72(XXXX)	20(XXXX)	04

1/ Dash numbers shown are for units without color filters. When color filters are required, add the color symbols of MIL-S-22885 in place of "(XXXX)" with location as shown on figure 3 of MIL-S-22885/16 Example M22885/15-07RGGR

2/ Dash numbers are interchangeable with and replace former dash numbers that contained an additional zero

Note For other than direct Government stocking, procurement of complete units may be made from the dash numbers indicated in table II The part number shall not appear on the items, but may be marked on shipping containers The individual part numbers as specified in MIL-S-22885/11, /12, and /16, when applicable, shall be marked as required

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - MI, SG
Navy -
Air Force - 11, 17, 80
DSA - ES

User activities
Army - ME, AT, AV, WC
Navy - MC, AS, OS, SH
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0927-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.