NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-22885/16D
25 April 1987
SUPERSEDING
MIL-S-22885/16C
26 June 1973

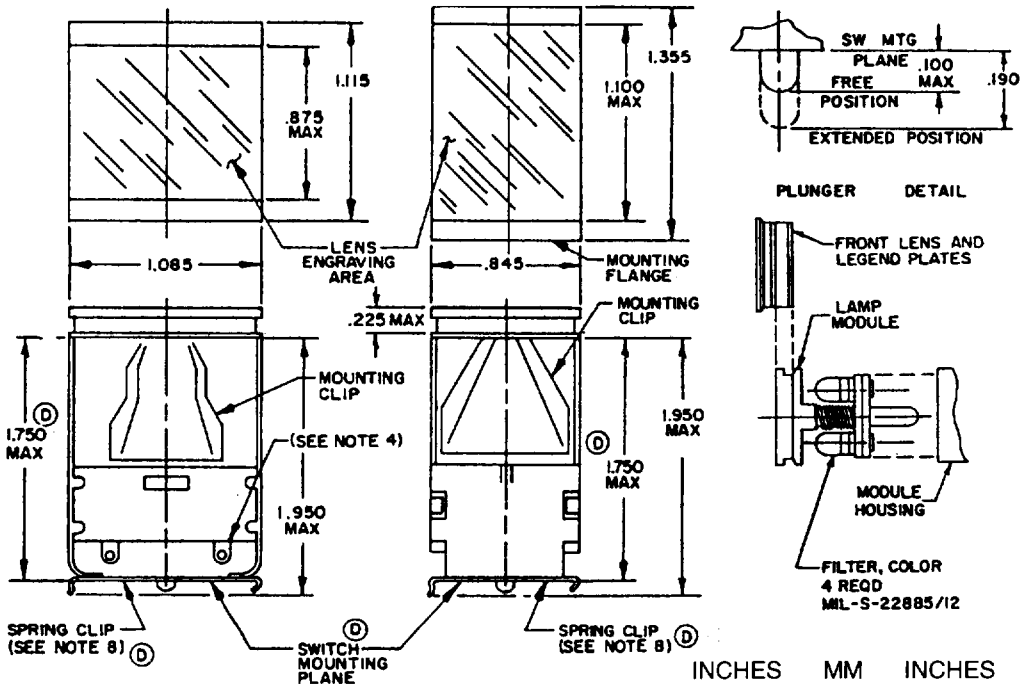
PERFORMANCE SPECIFICATION SHEET

Ⓓ SWITCH, PUSH BUTTON, ILLUMINATED,

4-LAMP, CLIP MOUNTED, LIGHT MODULE FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the indicator lights described herein shall consist of this document and the latest issue of Specification MIL-S-22885.



INCHES	MM	INCHES	MM
.100	2.54	1.085	27.56
.190	4.83	1.100	27.94
.225	5.72	1.115	28.32
.845	21.46	1.355	34.42
.875	22.23	1.950	49.53


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
3. The design configuration is optional within envelope dimensions shown.
4. The design of the terminals is optional. Terminals must accept #20 AWG wire.
5. Terminals shall be permanently identified with letters as shown in table II.
6. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch=25.4 mm.
7. Lamp circuit schematic shall be marked on module housing as shown in table II.
8. Switch clip design optional - must interface with MIL-S-22885/11 switch modules.

FIGURE 1. Switch or light modules, 4 lamp.


Ⓓ denotes changes

FSC 5930

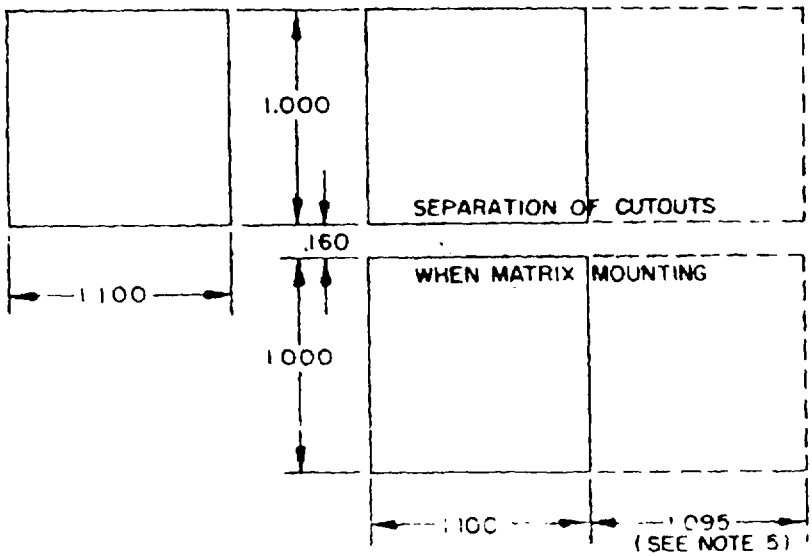Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.



Mounting for configuration A.

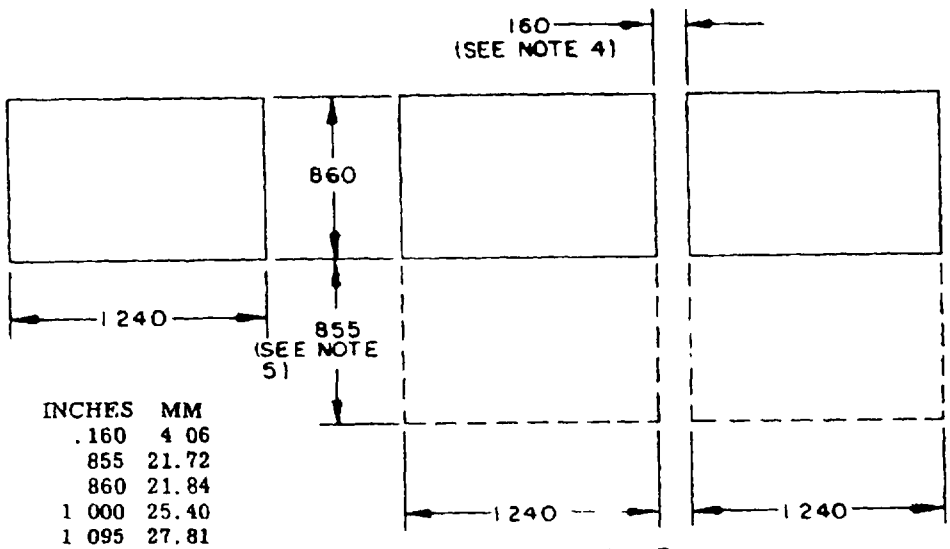

INCHES	MM
.160	4 06
855	21.72
860	21.84
1 000	25.40
1 095	27.81
1 100	27 94
1.240	31.50

Mounting for configuration B.

NOTES
1. Dimensions are in inches
2. Tolerance is ± .010 (25 mm), - 000 (.00 mm)
3. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. This is the separation of cutout when matrix mounting.
5. Add for each additional unit

FIGURE 2 Recommended panel cutouts

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.

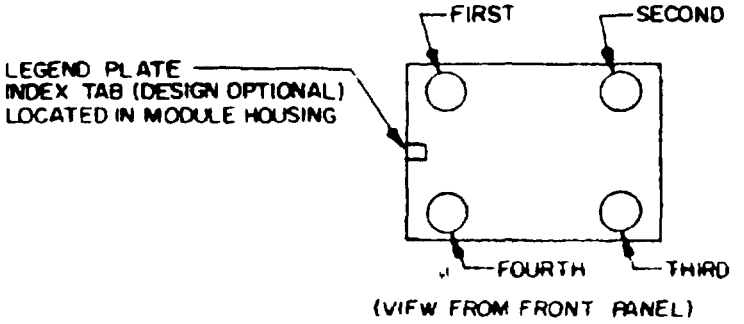






FIGURE 3. Color filter location with respect to modular indicator light (housing).

TABLE I. Lens plate.

CODE	LENS STYLE (DIFFUSER CONFIGURATION) 1/
A	SOLID
B	SPLIT VERTICALLY
C	SPLIT HORIZONTALLY

Ⓓ 1/ Orientation is as shown in figure 3

TABLE II Circuit schematic.

CODE	LAMP TERMINAL IDENTIFICATION	COMMON TERMINAL IDENTIFICATION	SCHEMATIC AND LAMP TERMINAL IDENTIFICATION 1/
1.	A, B, C, AND D	CONNECTED TO G	
2	A AND D B AND C	CONNECTED TO G CONNECTED TO H	
3	A AND B C AND D	CONNECTED TO G CONNECTED TO H	
4	A, 1 AND 2 B, 1 AND 2 C, 1 AND 2 D, 1 AND 2		

Ⓓ 1/ Lamp and terminal location shown is as viewed from front panel, with unit oriented as shown in figure 3

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 and tables I, II, and IV

(D) Light module shall consist of
1 - Lamp module (with translucent white diffuser)
1 - Transparent front lens plate
1 - Transparent legend plate
4 - Lamps (T-1-3/4 midget-flange-base, incandescent type) - Not included, order separately
4 - Color filters, when specified (see table IV)
1 - Lamp module housing
1 - Plunger stop

Enclosure design 1 (unsealed)

Vibration grade 1 (10-500 Hz)

Operation Operator/indicator

(D) Color Diffuser shall provide translucent white background, and appropriate lens style when illuminated, the background shall appear in a color determined by the color of the lamp filters

Luminance See table III.

(D) Thermal shock Maximum temperature shall be +71°C (+55°C with lamps energized) Minimum temperature shall be -55°C

Shock (specified pulse) Method 213 of MIL-STD-202, test condition A (50g)

TABLE III Luminance

With color filter	Minimum luminance 1/ (foot-lamberts)
Red	30
Green	35
(D) Yellow	90
Blue	8
White	90
None	250

1/ Illuminated with four MS25237-327 lamps at 28 Vdc and utilizing lens with lens style A

Plastic Lens assembly shall be heat resistant thermoplastic capable of withstanding 71°C

Mounting flanges Stainless steel with a lusterless finish

Weight 16 pound maximum.

(D) Plunger stop. Shall be readily adjustable or removable in the field without the need of special tools Plunger stop shall be removed when switching is required when indicator light is coupled to a switch assembly

(D) Plunger stop test With the plunger stop functionally installed in the lamp module, and the lamp module mounted by its normal mounting means, a static force of 25 pounds shall be applied to the legend plate for 1 minute The plunger stop shall restrict normal actuator travel

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:17Z
Check the source to verify that this is the current version before use.

QUALIFICATION

Qualification inspection shall be performed on the complete assembly as required by MIL-S-22885/15 using the applicable modular switch subassemblies

TABLE IV. Part number and design characteristics

Part number 1/ 2/	Mounting arrangement (configuration)	Lens plate code	Circuit schematic code
M22885/16			
-01(XXXX)	A	A	1
-02(XXXX)	B	A	1
-03(XXXX)	A	A	2
-04(XXXX)	B	A	2
-05(XXXX)	A	B	1
-06(XXXX)	B	B	1
-07(XXXX)	A	B	2
-08(XXXX)	B	B	2
-09(XXXX)		C	1
-10(XXXX)	B	C	1
-11(XXXX)	A	C	3
-12(XXXX)	B	C	3
-13(XXXX)	A	A	3
-14(XXXX)	B	A	3
-15(XXXX)	A	A	4
-16(XXXX)	B	A	4
-17(XXXX)	A	B	4
-18(XXXX)	B	B	4
-19(XXXX)	A	C	4
-20(XXXX)	B	C	4

1/ Part numbers shown are for operator/indicators without color filters When color filters are required, add the color symbols of MIL-S-22885 in place of "(XXXX)" with the location as shown on figure 3 Example M22885/16-11RRGG

2/ These part numbers are interchangeable with and replace former part numbers which contained an additional zero

INTENDED USE

The operator-indicators are intended for use as illuminated indicators and for use as illuminated operator/indicators when used with MIL-S-22885/11 modular switch sub-assemblies

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - SH
Air Force - 11, 17, 80
DSA - ES

User activities
Army - MU, ME, AT, AV
Navy - MC, AS, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0927-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:17Z
Check the source to verify that this is the current version before use.